Metasol Meta Solution MCCB/ELCB

Molded Case Circuit Breakers Earth Leakage Circuit Breakers







تهران - خيابان لاله زارنو - بالاتر از منوچهری - پاساژ البرزه۲ - طبقه اول- واحد ۲۳۵



49-9013477-140



١٠٠٧٩٢٢٩٣٥،



splus.ir/peoe_iran



aparat.com/peoe_iran







Contents

| 1 -1 ~ 1 -18 | Marking and configuration / External configuration |
|----------------------------|--|
| 2 -1 ~ 2 -10 | Quick selection table (Molded Case Circuit Breakers) |
| 3-1 ~ 3-4 | Quick selection table (Earth Leakage Circuit Breakers) |
| 4 -1 ~ 4 -2 | Type numbering system |
| 5 -1 ~ 5 -22 | Ratings (Molded Case Circuit Breakers) |
| 6-1 ~ 6-1 8 | Ratings (Earth Leakage Circuit Breakers) |
| 7 -1 ~ 7 -26 | Accessories |
| 8 -1 ~ 8 -9 | Characteristics curves |
| 9 -1 ~ 9 -31 | Dimensions |
| 10-1 ~ 10-17 | Technical information |

Metasol Meta Solution MCCB / ELCB


Molded Case Circuit Breakers / Earth Leakage Circuit Breakers



Upgraded for the global best worth!

LS will become a global leader in electric power solutions.



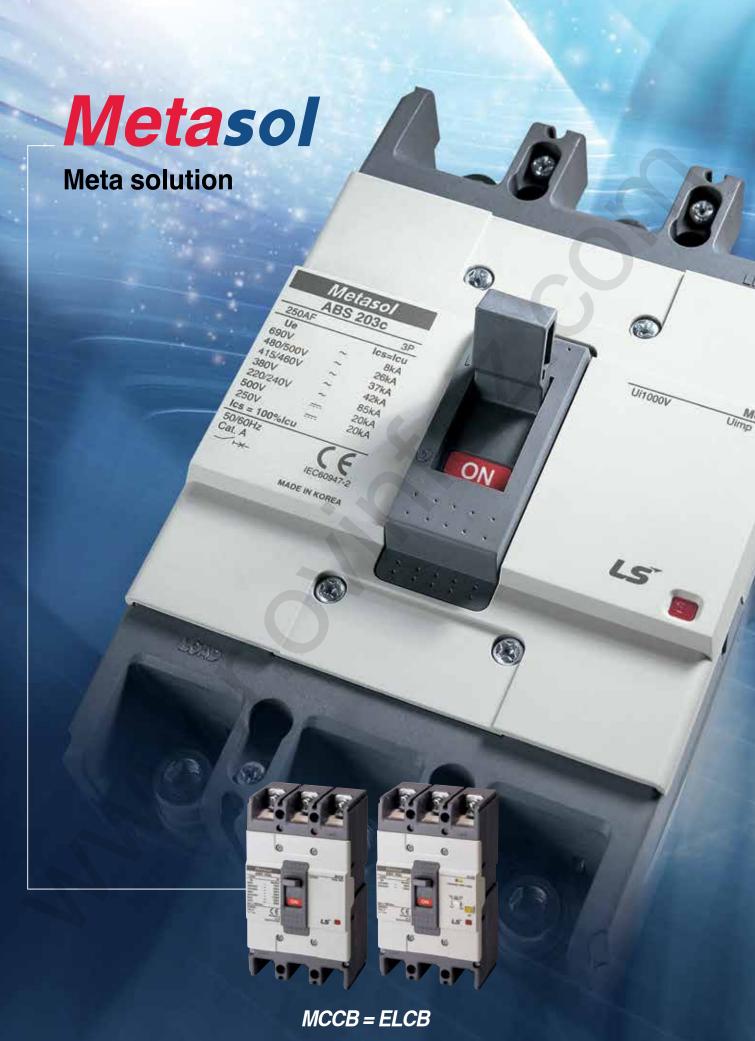

Molded Case Circuit Breaker / Earth Leakage Circuit Breaker

Upgrade of Meta-MEC series

... Metaso Low Voltage Circuit Breaker

- $U_i = 1000V$
- Uimp = 8kV



- Compatible and differentiated design
 - Compatible with the Meta-MEC
 - Outlook differentiated design
- Same external dimension with MCCB and ELCB
- Upgrade the coordination
 - Upgrade the coordination with Susol / Meta-MEC mass capacity

• Upgrade breaking capacity

- N100AF : 10 **⇒** 18kA

- S125AF : 25 **⇒** 37kA

- S250AF : 25 **⇒** 37kA

- H250AF : 35 **⇒** 50kA

- N400AF : 25 **⇒** 37kA


- S400AF : 35 **⇒** 50kA


- S800AF : 50 **⇒** 65kA



Metasol MCCB


Upgrade breaking capacity

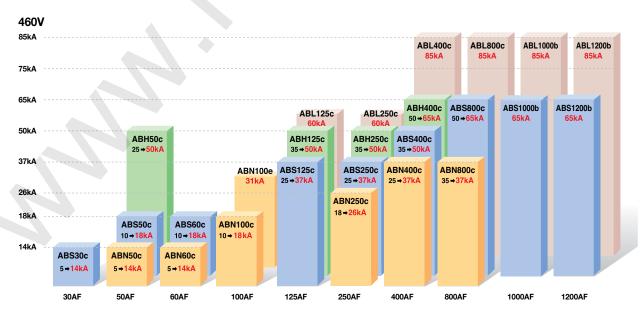

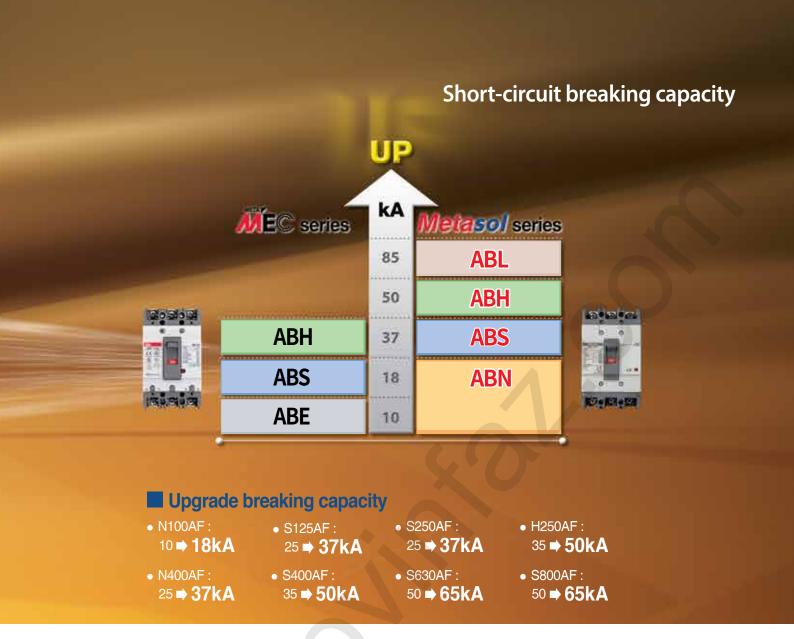

■ Metasol ELCB

Upgrade breaking capacity

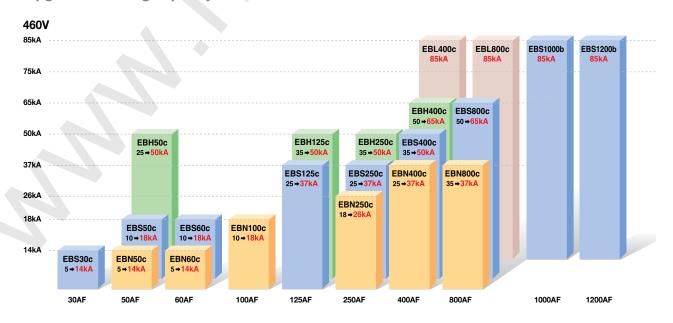


Metasol MCCB/ELCB Compatible and standard

- 100% compatible with Meta-MEC series.
- Standardized dimension (Depth, cutout) when the panel is made.



Metasol MCCB

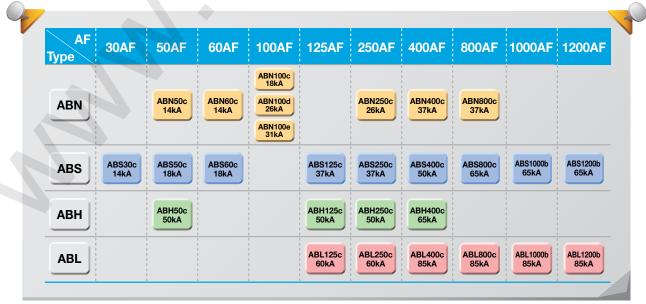

• Same external dimension with MCCB and ELCB.

ELCB (Earth Leakage Circuit Breaker)




75×130×60mm

90×155×60mm

105×165×60mm

Metasol ELCB

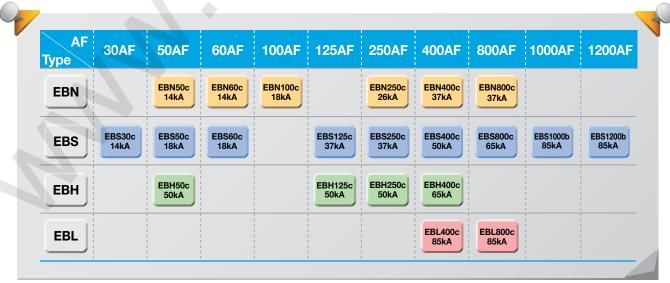


Note) Dimension is for 3 pole and breaking capacity is for AC460V.

Metasol MCCB/ELCB System overview




■ Various installable accessories

- Wider range of installable accessories compared to Meta MEC series.
- Composed of user friendly method.

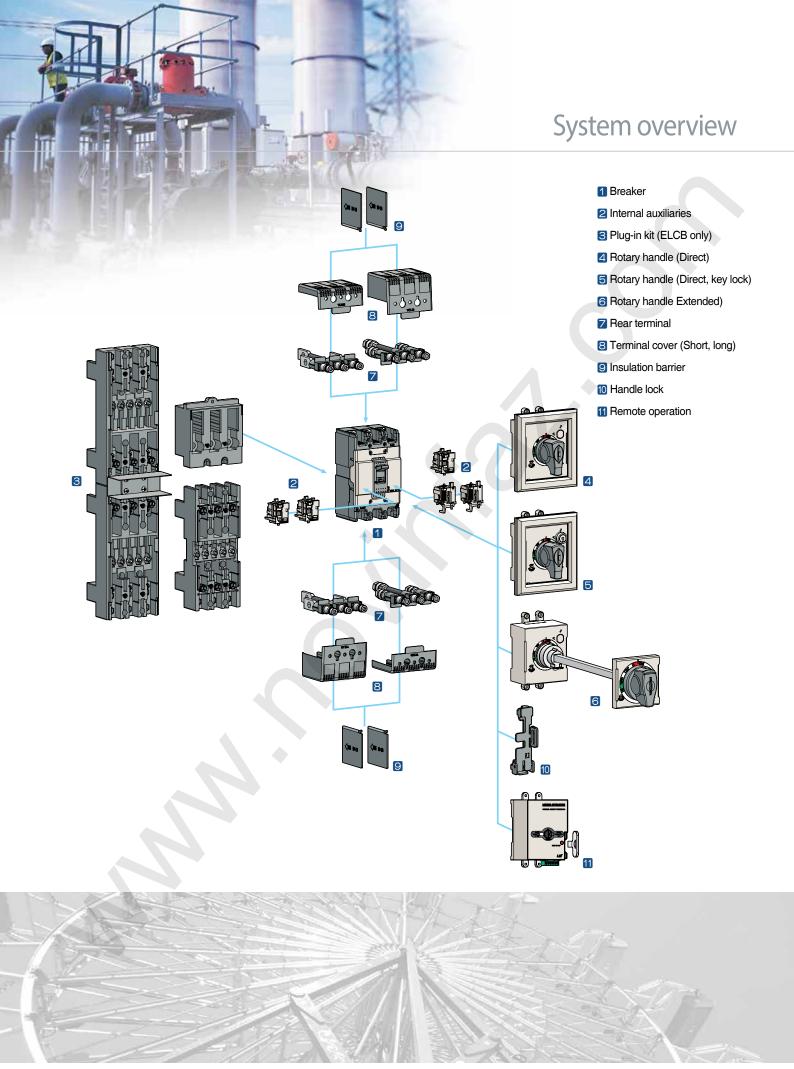

Metasol MCCB/ELCB Internal accessories

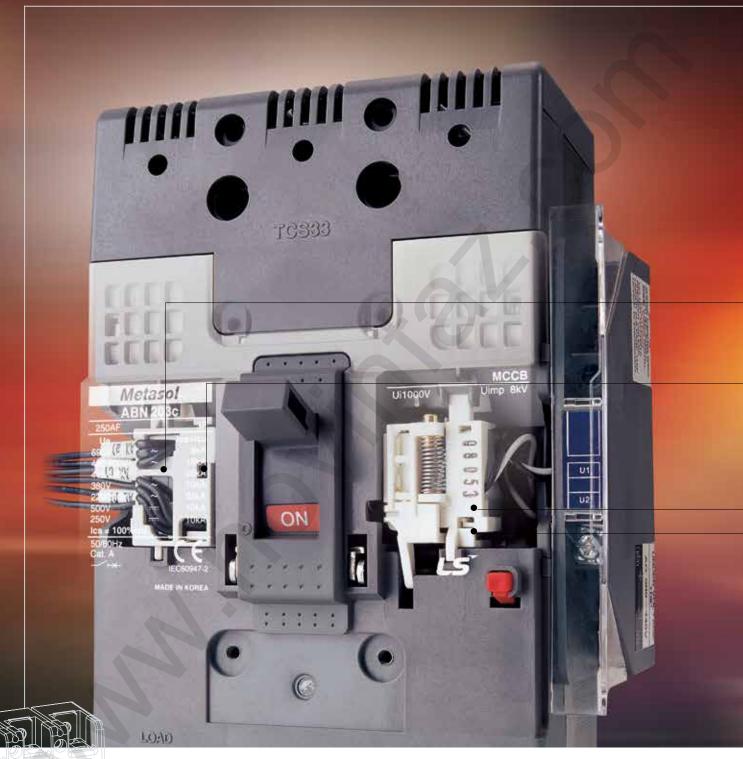

■ Internal accessories

Internal accessories can be commonly used in all Metasol MCCB and ELCB (Notice: Exception of SHT, UVT in ELCB)





Auxiliary switch (AX)

Auxiliary switch is for applications requiring remote "On" and "Off" indication. Each switch contains two contacts having a common connection. One is open and the other closed when the circuit breaker is open, and vice-versa.



Undervoltage trip (UVT)


The undervoltage trip automatically opens a circuit breaker when voltage drops to a value ranging between 35% to 70% of the line voltage. The operation is instantaneous, and the circuit breaker cannot be reclosed until the voltage returns to 85% of line voltage.

Continuously energized, the undervoltage trip must be operating be fore the circuit breaker can be closed.



Shunt trip (SHT)

The shunt trip opens the mechanism in response to an externally applied voltage signal. LS shunt trips include coil clearing contacts that automatically clear the signal circuit when the mechanism has tripped.contact with live parts and thereby guarantee protection against direct contacts.

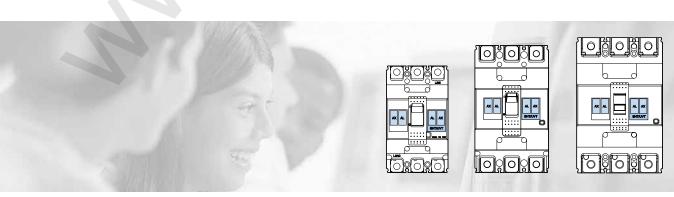

Metasol MCCB/ELCB External accessories



■ External accessories


Designed for various mount and user safety.




External accessories
















Front and rear connection

Several kinds of terminals can be equipped with ELCBs as well as MCCBs.

- Terminals for front connection
- Rear connection terminals

Plug-in base

It makes to extract and/or rapidly replace the circuit breaker without having to touch connections. (Easy replacement and maintenance)

Direct & extended rotary handle

There are two types of rotary handles.

- Direct rotary handle (with or w/o key lock device)
- Extended rotary handle

Locking device

- Fixed padlock
- Removable padlock
- Key lock device on direct handle

Insulation barrier

These allow the insulation characteristics between the phases at the connections to be increased.

Insulation terminal cover

The terminal covers are applied to the circuit-breaker to prevent accidental contact with live parts and thereby guarantee protection against direct contacts.

Remote operation

It is a device that makes it possible to turn On / Off the breaker even in the remote place. It is safe because it does not have to operate the handle of the circuit breaker by hand, and it is suitable for automation.

Marking and configuration

MCCB

MCCB model

- ABN: Economic type
- ABS: Standard type
- ABH: High capacity type

Standardized characteristics

Ui: Rated insulation voltage Uimp: Impulse withstand

Ue: Rated operational voltage

Icu: Ultimate breaking capacity

voltage

Ics: Service breaking capacity




Rated frequency

Utilization category

Standard

Symbol indicating suitability for isolation as defined by IEC 947-2

MCCB

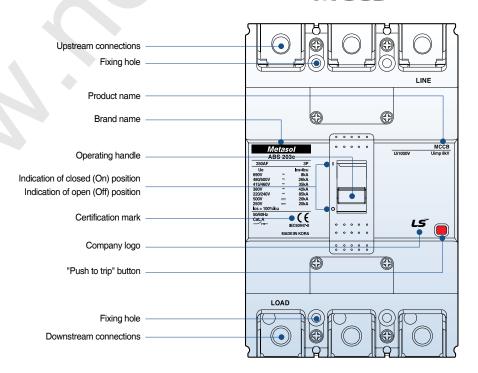

ELCB



ELCB model

- EBN: Economic type
- EBS: Standard type
- EBH: High capacity type


Rated frequency

Utilization category

Standard

Symbol indicating suitability for isolation as defined by IEC 947-2

ELCB

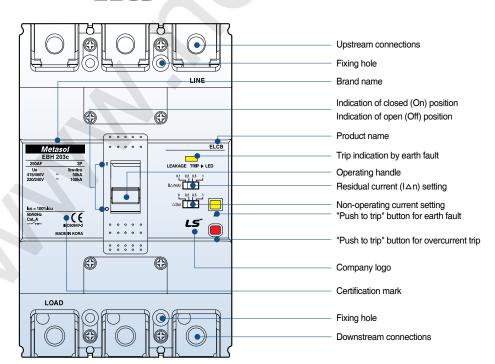

External configuration

1) Handle

- · Function of indications
- "On" "Off" "Trip"
- Resetting

When the handle indicates "Tripped" position it must first be reset by moving the handle to the "Off" position and then closing is possible


- Trip-free even if the handle is held at "On", the Breaker will trip if an over current flows
- Suitable for verification of the main contact position under abnormal conditions because the handle doesn't indicate open position

2 Arc-Extinguishing unit

LS patent technique PASQ Arc-extinguishing unit

PASQ: Puffer assisted self-quenching


· Reduction of arc voltage for a short time




Trip button (Push to trip)

 Enables tripping mechanically from outside, for confirming the operation of the accessory switches and the manual resetting function.

MCCB

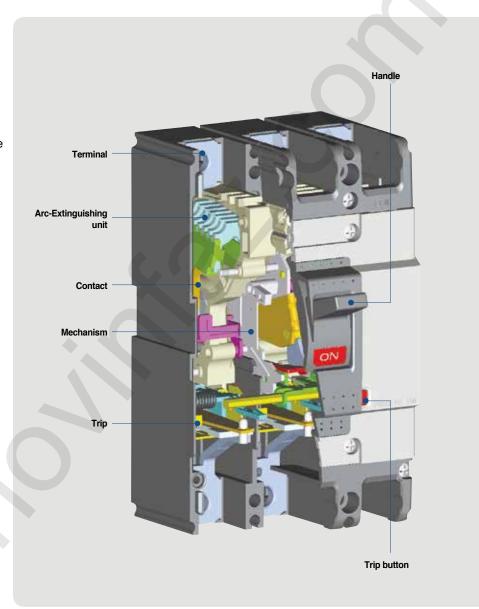

A application of PASQ arc extinguishing



 The reduction of breaking time by applying PASQ arc extinguishing for inhibition of arc voltage for a short time.

A application of current limiting structure

- Current limiting repulsion structure (U fixed structure)
- Toggle structure
- When the operating unit repulses by short circuit current, repulsion structure at bigger angle.







ELCB



1 Residual indication LED

Normal situation is yellow, trio situation is red

2 Residual test button

Special design for upgrade to prohibit resistance accident

③ Residual detection unit (ZCT + Main board)


 For upgrade the design is selected the 3 phase input power method and in case of voltage problem, it can break residual current safely.

Upgrade coil operation by special design



- Sliding structure application of trip lever
- Trip special design by applying design button method.
- Upgrade the testing unit

3 phase power supply method



- In case of 1 phase loss residual operation upgrade
- New IEC standard

Quick selection table Molded Case Circuit Breakers







MCCBs


| | | | | | | | | - | |
|---------------------------------------|-----------------------|-------------------|------------------|--------|-------------------|-----------|------------|--------------|--|
| AF | | 30 |)AF | | 50AF | | 60 | AF | |
| Туре | | E-type | S-type | N-type | S-type | H-type | N-type | S-type | |
| Type and pole | 2-pole | ABE32b | ABS32c | ABN52c | ABS52c | ABH52c | ABN62c | ABS62c | |
| | 3-pole | ABE33b | ABS33c | ABN53c | ABS53c | ABH53c | ABN63c | ABS63c | |
| | 4-pole | - | ABS34c | ABN54c | ABS54c | ABH54c | ABN64c | ABS64c | |
| Rated current, In | Α | (3, 5, 10) Not | e) 1, 15, 20, 30 | , | 15, 20, 30, 40, 5 | 50 | 15, 20, 30 | , 40, 50, 60 | |
| Rated operational | AC (V) | 460 | 690 | 690 | 690 | 690 | 690 | 690 | |
| voltage, Ue | DC (V) | - | 500 | 500 | 500 | 500 | 500 | 500 | |
| Rated insulation voltage, Ui | V | 460 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Rated impulse withstand voltage, Uimp | kV | 6 | 8 | 8 | 8 | 8 | 8 | 8 | |
| Rated short-circuit bre | aking capaci | ity (Icu) kA (Sym | n), IEC 60947-2 | | | | | | |
| AC | 690V | - | 2.5 | 2.5 | 5 | 10 | 2.5 | 5 | |
| | 480/500V | - | 7.5 (5) | 7.5 | 10 | 35 | 7.5 | 10 | |
| | 415/460V | 2.5 | 14 (10) | 14 | 18 | 50 | 14 | 18 | |
| | 380V | 2.5 | 18 (14) | 18 | 22 | 50 | 18 | 22 | |
| | 220/250V | 5 | 30 (25) | 30 | 35 | 100 | 30 | 35 | |
| DC | 500V (3P) | - (| 5 | 5 | 10 | 30 | 5 | 10 | |
| | 250V (2P) | -(| 5 | 5 | 10 | 30 | 5 | 10 | |
| lcs=%×lcu | | 50 | 100 | 100 | 100 | 100 | 100 | 100 | |
| Dimensions (mm) | $W \times H \times D$ | 75×96×60 | 75×130×60 | 75×1 | 30×60 | 90×155×60 | 75×1 | 30×60 | |
| | (3-pole) | 12/30/00 | (Fig. 1) | (Fi | g. 1) | (Fig. 2) | (Fi | g. 1) | |


^{*} For more detail see the page. Ratings 5-1page ~ 5-14page, Curves 8-1page ~ 8-3page, and Drawings 9-1page ~ 9-4page

- Note) 1. The short-circuit breaking capacities of ABS30AF type in () are applied to the rated current in (3, 5, 10A) 2. MCCBs can be applied to both 50 and 60Hz.

- 3. Standard type is designed on the basis of 40°C of ambient temperature. 4. There are certain products for hot areas. (30–250AF on the basis of 55°C) 5. The lcs(service breaking capacity) of ABN100e, ABL125/250AF are in ()

| AF Type | 30AF | 50AF | 60AF | 100AF | 125AF | 250AF |
|------------|----------------|----------------|----------------|------------------------------------|-----------------|-----------------|
| ABN | | ABN50c 14kA | ABN60c 14kA | ABN100c 18kA ABN100e 31kA | | ABN250c 26kA |
| ABS | ABS30c 14kA | ABS50c 18kA | ABS60c 18kA | | ABS125c 37kA | ABS250c 37kA |
| АВН | | ABH50c 50kA | | | ABH125c 50kA | ABH250c 50kA |
| ABL | | | | | ABL125c 60kA | ABL250c 60kA |





(Fig. 1)


2










| 100 |)AF | | 125AF | | 250AF | | | | |
|-----------------|-----------------|------------|--------------------|-----------|------------|-------------------|------------------|-----------|--|
| N-t | уре | S-type | H-type | L-type | N-type | S-type | H-type | L-type | |
| ABN102c | ABN102e | ABS102c | ABH102c | ABL102c | ABN202c | ABS202c | ABH202c | ABL202c | |
| ABN103c | ABN103e | ABS103c | ABH103c | ABL103c | ABN203c | ABS203c | ABH203c | ABL203c | |
| ABN104c | ABN104e | ABS104c | ABH104c | ABL104c | ABN204c | ABS204c | ABH204c | ABL204c | |
| 15, 20, 30, 40, | 50, 60, 75, 100 | 15, 20, 30 | 0, 40, 50, 60, 75, | 100, 125 | | 100, 125, 150, 17 | 75, 200, 225, 25 | 0 | |
| 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 | |
| 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | |
| 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | |
| | | | | | | | | | |
| 5 | 7.5 (5) | 8 | 10 | 10 (10) | 8 | 8 | 10 | 10 (10) | |
| 10 | 14 (10) | 26 | 35 | 35 (35) | 18 | 26 | 35 | 35 (35) | |
| 18 | 31 (18) | 37 | 50 | 60 (50) | 26 | 37 | 50 | 60 (50) | |
| 22 | 31 (22) | 42 | 50 | 60 (50) | 30 | 42 | 50 | 60 (50) | |
| 35 | 65 (35) | 85 | 100 | 125 (100) | 65 | 85 | 100 | 125 (100) | |
| 10 | 15 (10) | 20 | 30 | 30 (30) | 10 | 20 | 30 | 30 (30) | |
| 10 | 15 (10) | 20 | 30 | 30 (30) | 10 | 20 | 30 | 30 (30) | |
| 100 | () | 100 | 100 | () | 100 | 100 | 100 | () | |
| 75×130×60 | | 90×155×60 | | | 105×165×60 | | | | |
| (Fig | g. 1) | | (Fig. 2) | | (Fig. 3) | | | | |



(Fig. 2)







Quick selection table Molded Case Circuit Breakers





MCCBs

| AF | | | 400 |)AF | | |
|--|-------------------------------|------------------------------|----------------------------|----------------------------|------------------------------|--|
| /pe | | N-type | S-type | H-type | L-type | |
| pe and pole | 2-pole | ABN402c | ABS402c | ABH402c | ABL402c | |
| | 3-pole | ABN403c | ABS403c | ABH403c | ABL403c | |
| | 4-pole | ABN404c | ABS404c | ABH404c | ABL404c | |
| ated current, In | Α | | 250, 300, | 350, 400 | | |
| ated operational | AC (V) | 690 | 690 | 690 | 690 | |
| oltage, Ue | DC (V) | 500 | 500 | 500 | 500 | |
| ated insulation voltage, Ui | V | 1000 | 1000 | 1000 | 1000 | |
| ated impulse withstand oltage, Uimp | kV | 8 | 8 | 8 | 8 | |
| ated short-circuit br | eaking capacity (| (Icu) kA (Sym) , IEC 60947-2 | | | | |
| AC | 690V | 5 | 8 | 10 | 14 | |
| | 480/500V | 18 | 0.5 | | | |
| | | . • | 35 | 50 | 65 | |
| | 415/460V | 37 | 50 | 50 65 | 65 85 | |
| | 415/460V 380V | | · | | | |
| | | 37 | 50 | 65 | 85 | |
| DC | 380V | 37 42 | 50 65 | 65 70 | 85 100 | |
| DC | 380V 220/250V | 37 42 50 | 50 65 75 | 65 70 85 | 85 100 125 | |
| DC | 380V 220/250V 500V (3P) | 37 42 50 10 | 50 65 75 20 | 65 70 85 40 | 85 100 125 40 | |
| | 380V 220/250V 500V (3P) | 37 42 50 10 | 50 65 75 20 20 | 65 70 85 40 40 | 85 100 125 40 40 | |

 $^{^{\}star}$ For more detail see the page. Ratings 5-15page \sim 5-22page, Curves 8-4page \sim 8-5page, and Drawings 9-5page \sim 9-8page

- Note) 1. MCCBs can be applied to both 50 and 60Hz.
 2. Standard type is designed on the basis of 40°c of ambient temperature.
 3. There are certain products for hot areas. (400~800AF on the basis of 50°c)

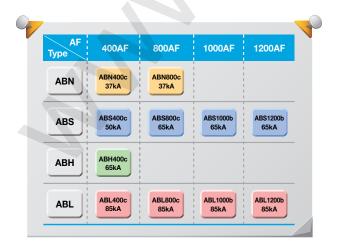











| | 800AF | | 100 | 0AF | | 1200AF | | |
|---------|--------------------|---------|----------|----------|-------------|-----------|----------|--|
| N-type | S-type | L-type | S-type | L-type | S-t | type | L-type | |
| ABN802c | ABS802c | ABL802c | - | - | - , | - | - | |
| ABN803c | ABS803c | ABL803c | ABS1003b | ABL1003b | ABS1203b | ABS1203bE | ABL1203b | |
| ABN804c | ABS804c | ABL804c | ABS1004b | ABL1004b | ABS1204b | - | ABL1204b | |
| | 500, 630, 700, 800 |) | 10 | 000 | | 1200 | | |
| 690 | 690 | 690 | 600 | 600 | 600 | 600 | 600 | |
| 500 | 500 | 500 | - | 2.0 | 7/1-> | - | - | |
| 1000 | 1000 | 1000 | 690 | 690 | 690 | 690 | 690 | |
| 8 | 8 | 8 | 6 | 6 | 6 | 6 | 6 | |
| | | | | | | | | |
| 8 | 10 | 14 | - | - | - | - | - | |
| 25 | 45 | 65 | 50 | 75 | 50 | 50 | 75 | |
| 37 | 65 | 85 | 65 | 85 | 65 | 65 | 85 | |
| 45 | 75 | 100 | 65 | 85 | 65 | 65 | 85 | |
| 50 | 85 | 125 | 100 | 125 | 100 | 100 | 125 | |
| 10 | 20 | 40 | - | - | - | - | - | |
| 10 | 20 | 40 | | - | - | - | - | |
| 100 | 100 | 75 | 50 | 50 | 50 | 50 | 50 | |
| | 210×280×109 | | 220×4 | 00×105 | 220×400×105 | | | |
| | (Fig. 5) | | (Fi | g. 6) | | (Fig. 6) | | |





(Fig. 5)





Quick selection table

Motor protection Molded Case Circuit Breakers









MCCBs

| AF | | 30AF | | 50AF | | 60 | AF | |
|---------------------------------------|-----------------------|--------------------|-------------------|----------------|-----------|---------|---------|--|
| Туре | | S-type | N-type | S-type | H-type | N-type | S-type | |
| Type and pole | 3-pole | ABS33cM | ABN53cM | ABS53cM | ABH53cM | ABN63cM | ABS63cM | |
| Rated current, In | Α | 16, 24 | | 16, 24, 32, 45 | | 6 | 60 | |
| Rated operational | AC (V) | 690 | 690 | 690 | 690 | 690 | 690 | |
| voltage, Ue | DC (V) | 500 | 500 | 500 | 500 | 500 | 500 | |
| Rated insulation voltage, Ui | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Rated impulse withstand voltage, Uimp | kV | 8 | 8 | 8 | 8 | 8 | 8 | |
| Rated short-circuit b | reaking cap | pacity (Icu) kA (S | ym) , IEC 60947-2 | | | | | |
| AC | 690V | 2.5 | 2.5 | 5 | 10 | 2.5 | 5 | |
| | 480/500V | 7.5 | 7.5 | 10 | 35 | 7.5 | 10 | |
| | 415/460V | 14 | 14 | 18 | 50 | 14 | 18 | |
| | 380V | 18 | 18 | 22 | 50 | 18 | 22 | |
| | 220/250V | 30 | 30 | 35 | 100 | 30 | 35 | |
| DC | 500V (3P) | 5 | 5 | 10 | 30 | 5 | 10 | |
| lcs=%×lcu | | 100 | 100 | 100 | 100 | 100 | 100 | |
| Dimensions (mm) | $W \times H \times D$ | 75×130×60 | 75×1 | 30×60 | 90×155×60 | 75×1 | 30×60 | |
| | (3-pole) | (Fig. 1) | (Fi | g. 1) | (Fig. 2) | (Fi | g. 1) | |

 $^{^\}star$ For more detail see the page. Ratings 5-3page \sim 5-14page, Curves 8-7page \sim 8-8page, and Drawings 9-2page \sim 9-4page

| | | | | | | | 7 |
|------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|---|
| AF Type | 30AF | 50AF | 60AF | 100AF | 125AF | 250AF | |
| ABN | | ABN50cM 14kA | ABN60cM 14kA | ABN100cM 18kA | | | _ |
| ABS | ABS30cM 14kA | ABS50cM 18kA | ABS60cM 18kA | | ABS125cM 37kA | ABS250cM 37kA | |
| АВН | i i | ABH50cM 50kA | | | ABH125cM 50kA | ABH250cM 50kA | |
| | | | | | | | |





(Fig. 1)

Note) 1. Same electrical and physical specification with MCCB.
2. Accessory: same application with MCCB
3. MCCBs can be applied to both 50 and 60Hz.


2










| 100AF | 125 | AF | 250AF | | | |
|------------|----------|----------|--------------------|----------|----------|--|
| N-type | S-type | H-type | N-type | S-type | H-type | |
| ABN103cM | ABS103cM | ABH103cM | ABN203cM | ABS203cM | ABH203cM | |
| 60, 75, 90 | 60, 7 | 5, 90 | 125, 150, 175, 225 | | | |
| 690 | 690 | 690 | 690 | 690 | 690 | |
| 500 | 500 | 500 | 500 | 500 | 500 | |
| 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| 8 | 8 | 8 | 8 | 8 | 8 | |
| | | | | | | |
| 5 | 8 | 10 | 8 | 8 | 10 | |
| 10 | 26 | 35 | 18 | 26 | 35 | |
| 18 | 37 | 50 | 26 | 37 | 50 | |
| 22 | 42 | 50 | 30 | 42 | 50 | |
| 35 | 85 | 100 | 65 | 85 | 100 | |
| 10 | 20 | 30 | 10 | 20 | 30 | |
| 100 | 100 | 100 | 100 | 100 | 100 | |
| 75×130×60 | 90×15 | 55×60 | 105×165×60 | | | |
| (Fig. 1) | (Fig | g. 2) | | (Fig. 3) | | |









(Fig. 2) (Fig. 3)

Quick selection table ZCT Molded Case Circuit Breakers







MCCBs

| AF | | 30AF | | 50AF | | 60 | AF | |
|---------------------------------------|-----------------------|--------------------|-------------------|--------------------|-----------|------------|--------------|--|
| Туре | | S-type | N-type | S-type | H-type | N-type | S-type | |
| | 2-pole | - | - | - | ABH52cZ | - | - | |
| Type and pole | 3-pole | ABS33cZ | ABN53cZ | ABS53cZ | ABH53cZ | ABN63cZ | ABS63cZ | |
| | 4-pole | ABS34cZ | ABN54cZ | ABS54cZ | ABH54cZ | ABN64cZ | ABS64cZ | |
| Rated current, In | Α | 15, 20, 30 | | 15, 20, 30, 40, 50 | | 15, 20, 30 | , 40, 50, 60 | |
| Rated operational voltage, Ue | AC (V) | 690 | 690 | 690 | 690 | 690 | 690 | |
| Rated insulation voltage, Ui | V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| Rated impulse withstand voltage, Uimp | kV | 8 | 8 | 8 | 8 | 8 | 8 | |
| Rated short-circuit b | reaking cap | pacity (Icu) kA (S | ym) , IEC 60947-2 | | | | | |
| AC | 690V | 2.5 | 2.5 | 5 | 10 | 2.5 | 5 | |
| | 480/500V | 7.5 | 7.5 | 10 | 35 | 7.5 | 10 | |
| | 415/460V | 14 | 14 | 18 | 50 | 14 | 18 | |
| | 380V | 18 | 18 | 22 | 50 | 18 | 22 | |
| | 220/250V | 30 | 30 | 35 | 100 | 30 | 35 | |
| lcs=%×lcu | | 100 | 100 | 100 | 100 | 100 | 100 | |
| Dimensions (mm) | $W \times H \times D$ | 75×130×60 | 75×1 | 30×60 | 90×155×60 | 75×1 | 30×60 | |
| | (3-pole) | (Fig. 1) | (Fi | g. 1) | (Fig. 2) | (Fi | g. 1) | |

 $^{^{\}star}$ For more detail see the page. Ratings 5-3page \sim 5-14page, Curves 8-1page \sim 8-3page, and Drawings 9-2page \sim 9-4page

- Note) 1. Same electrical and physical specification with MCCB.

 2. Accessory: Same application with MCCB.


 3. MCCBs can be applied to both 50 and 60Hz.


 4. Marking ZCT on the Aux. cover right side

 5. Dimension of ABH52c, ABS102c and ABH102, which have a built-in ZCT, is 60 (W) X 155 (H) X 60 (D) mm

 6. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

| / | | | | | | • | 1 |
|------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|---|
| AF Type | 30AF | 50AF | 60AF | 100AF | 125AF | 250AF | |
| ABN | | ABN50cZ 14kA | ABN60cZ 14kA | ABN100cZ 18kA | | ABN250cZ 26kA | |
| ABS | ABS30cZ 14kA | ABS50cZ 18kA | ABS60cZ 18kA | | ABS125cZ 37kA | ABS250cZ 37kA | |
| АВН | | ABH50cZ 50kA | | | ABH125cZ 50kA | ABH250cZ 50kA | |
| | | | | | | | |






2










| 100AF | 125AF 250AF | | | | | |
|-----------------------------------|--------------------|--------------------|--------------|-------------------------|----------|--|
| N-type | S-type | H-type | N-type | S-type | H-type | |
| - | ABS102cZ | ABH102cZ | - | - | - | |
| ABN103cZ | ABS103cZ | ABH103cZ | ABN203cZ | ABS203cZ | ABH203cZ | |
| ABN104cZ | ABS104cZ | ABH104cZ | ABN204cZ | ABS204cZ | ABH204cZ | |
| 15, 20, 30, 40, 50 60, 75, 100 | 15, 20, 30, 40, 50 | , 60, 75, 100, 125 | 100, | 125, 150, 175, 200, 225 | , 250 | |
| 690 | 690 | 690 | 690 | 690 | 690 | |
| 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| 8 | 8 | 8 | 8 | 8 | 8 | |
| | | | | | | |
| 5 | 8 | 10 | 8 | 8 | 10 | |
| 10 | 26 | 35 | 18 | 26 | 35 | |
| 18 | 37 | 50 | 26 | 37 | 50 | |
| 22 | 42 | 50 | 30 | 42 | 50 | |
| 35 | 85 | 100 | 65 | 85 | 100 | |
| 100 | 100 | 100 | 100 | 100 | 100 | |
| 75×130×60 | 90×15 | 55×60 | 105×165×60 | | | |
| (Fig. 1) | (Fig | g. 2) | | (Fig. 3) | | |




(Fig. 2)









Quick selection table ZCT Molded Case Circuit Breakers




MCCBs

| AF | | | 400 | DAF | | | |
|---------------------------------------|-----------------------|-------------------------------|----------|------------|----------|--|--|
| Туре | | N-type | S-type | H-type | L-type | | |
| Type and pole | 2-pole | - | - | - | - | | |
| | 3-pole | ABN403cZ | ABS403cZ | ABH403cZ | ABL403cZ | | |
| | 4-pole | ABN404cZ | ABS404cZ | ABH404cZ | ABL404cZ | | |
| Rated current, In | Α | | 250, 300 | , 350, 400 | | | |
| Rated operational voltage, Ue | AC (V) | 690 | 690 | 690 | 690 | | |
| Rated insulation voltage, Ui | ٧ | 1000 | 1000 | 1000 | 1000 | | |
| Rated impulse withstand voltage, Uimp | kV | 8 | 8 | 8 | 8 | | |
| Rated short-circuit bre | eaking capacity | y (Icu) kA (Sym) , IEC 60947- | 2 | | | | |
| AC | 690V | 5 | 8 | 10 | 14 | | |
| | 480/500V | 18 | 35 | 50 | 65 | | |
| | 415/460V | 37 | 50 | 65 | 85 | | |
| | 380V | 42 | 65 | 70 | 100 | | |
| | 220/250V | 50 | 75 | 85 | 125 | | |
| lcs=%×lcu | | 100 | 100 | 100 | 75 | | |
| Dimensions (mm) | $W \times H \times D$ | | 140×2 | 57×109 | 1 | | |
| | (3-pole) | (Fig. 4) | | | | | |

 $^{^{\}star}$ For more detail see the page. Ratings 5-15page \sim 5-18page, Curves 8-4page and Drawings 9-5page \sim 9-6page


- 2. Accessory: Same application with MCCB
 3. MCCBs can be applied to both 50 and 60Hz.
 4. Marking ZCT on the Aux. cover right side
 5. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

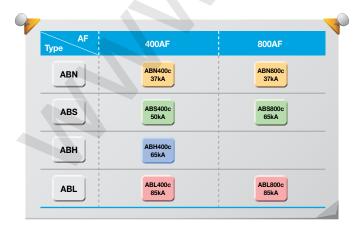



Note) 1. Same electrical and physical specification with MCCB.



| | 800AF | |
|----------|--------------------|----------|
| N-type | S-type | L-type |
| - | - | |
| ABN803cZ | ABS803cZ | ABL803cZ |
| - | · | - |
| | 500, 630, 700, 800 | |
| 690 | 690 | 690 |
| 1000 | 1000 | 1000 |
| 8 | 8 | 8 |
| | | |
| 8 | 10 | 14 |
| 25 | 45 | 65 |
| 37 | 65 | 85 |
| 45 | 75 | 100 |
| 50 | 85 | 125 |
| 100 | 100 | 75 |
| | 210×280×109 | |
| | (Fig. 5) | |

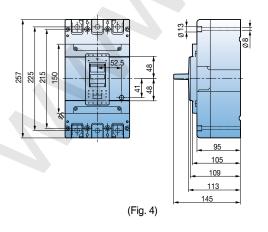





Quick selection table Earth Leakage Circuit Breakers







ELCBs

| AF | | | 30AF | | 50AF | | 60 | AF | |
|--------------------------------|----------------------------------|-----------------------|--|--|------------------|---------------|--------------------------------------|--------|--|
| Туре | | S-type N-type S-type | | H-type | N-type | S-type | | | |
| Type and pole | ; | 2-pole | EBS32c | EBN52c | - | - | - | - | |
| | | 3-pole | EBS33c | EBN53c | EBS53c | EBH53c | EBN63c | EBS63c | |
| | | 4-pole | EBS34c | - | EBS54c | EBH54c | - | EBS64c | |
| Protective fun | ction | | Overload, short-circuit and ground fault | Overload, short-circuit and ground fault | | short | rload, -circuit ound fault | | |
| Rated current | , In | Α | (5, 10) Note)3,15, 20, 30 | 1 | 5, 20, 30, 40, 5 | 0 | | 60 | |
| Rated impulse voltage, Uimp | | kV | 6 | 6 | | 6 | | | |
| Instantaneous | Rated residual current, I△n | mA | 30, 100, 100/200/500, 100/300/500 | 30, 100, 100/200/500, 100/300/500 | | | 30, 100, 100/200/500, 100/300/500 | | |
| type | Residual current off-time at I△n | sec | ≤0.1 | ≤0.1 | | | ≤0.1 | | |
| | Rated operational voltage, Ue | AC (V) | 220/460 | 220/460 | | | 220/460 | | |
| | Rated residual current | 1A | 0.1/0.2/0.5/1 | 0.1/0.2/0.5/1 | | 0.1/0.2/0.5/1 | | | |
| Time delay | Intentional time delay | 1s | 0/0.2/0.5/1 | 0/0.2/0.5/1 | | 0/0.2/0.5/1 | | | |
| type | Rated residual current | 2A | 0.1/0.4/1/2 | 0.1/0.4/1/2 | | | 0.1/0.4/1/2 | | |
| | Intentional time delay | 2s | 0.5/1/1.5/2 | 0.5/1/1.5/2 | | | 0.5/1/1.5/2 | | |
| Rated short- | circuit breaking capacity (Icu | u) kA (Sym) | , IEC 60947-2 | | | | | | |
| | | 415/460V | 14 (10) | 14 | 18 | 50 | 14 | 18 | |
| | | 220/250V | 30 (25) | 30 | 35 | 100 | 30 | 35 | |
| lcs=%×lcu | | | 100 | 100 | 100 | 100 | 100 | 100 | |
| Dimensions (mm) W×H×D (3-pole) | | $W \times H \times D$ | 75×130×60 | 75×13 | 30×60 | 90×155×60 | 75×1 | 30×60 | |
| | | (3-pole) | (Fig. 1) | (Fig. 1) (Fig. 2) | | (Fig. 2) | (Fig. 1) | | |

 $^{^\}star$ For more detail see the page. Ratings 6-1page \sim 6-12page, Curves 8-1 \sim 8-3page and Drawings 9-9page \sim 9-11page


Note) 1. MCCBs can be applied to both 50 and 60Hz.


- 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

 3. The short-circuit breaking capacities in () are applied to the rated current in (5, 10A)

 4. Below 250AF Some ELCBs have a test lead type for remote testing.

| 0 | 7 | | | | | | | 1 |
|---|------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|----------|
| | AF Type | 30AF | 50AF | 60AF | 100AF | 125AF | 250AF | |
| | EBN | | EBN50c 14kA | EBN60c 14kA | EBN100c 18kA | | EBN250c 26kA | _ |
| | EBS | EBS30c 14kA | EBS50c 18kA | EBS60c 18kA | | EBS125c 37kA | EBS250c 37kA | _ |
| | ЕВН | | EBH50c 50kA | | | EBH125c 50kA | EBH250c 50kA | |
| | | | | | | | | |






(Fig. 1)










| 100AF | 125 | AF | | 250AF | | |
|--|---------------------------------|--------------------|---------|--|---------|--|
| N-type | S-type | H-type | N-type | S-type | H-type | |
| EBN102c | - | - | EBN202c | - | - | |
| EBN103c | EBS103c | EBH103c | EBN203c | EBS203c | EBH203c | |
| EBN104c | EBS104c | EBH104c | - | EBS204c | EBH204c | |
| Overload, short-circuit and ground fault | Overload, s and grou | | | Overload, short-circuit and ground fault | | |
| 60, 75, 100 | 15, 20, 30, 40, 50 | , 60, 75, 100, 125 | 100, | 125, 150, 175, 200, 225, | 250 | |
| 6 | 6 | 3 | | 6 | | |
| 30, 100, 100/200/500, 100/300/500 | 30, 100, 100/200/ | 500, 100/300/500 | 30, | 30, 100, 100/200/500, 100/300/500 | | |
| ≤0.1 | ≤(| 0.1 | | ≤0.1 | | |
| 220/460 | 220/ | 460 | | 220/460 | | |
| 0.1/0.2/0.5/1 | 0.1/0.2 | 2/0.5/1 | | 0.1/0.2/0.5/1 | | |
| 0/0.2/0.5/1 | 0/0.2/ | 0.5/1 | | 0/0.2/0.5/1 | | |
| 0.1/0.4/1/2 | 0.1/0. | 4/1/2 | | 0.1/0.4/1/2 | | |
| 0.5/1/1.5/2 | 1/1.5/2 0.5/1/1.5/2 0.5/1/1.5/2 | | | | | |
| | | | | | | |
| 18 | 37 | 50 | 26 | 37 | 50 | |
| 35 | 85 | 100 | 65 | 85 | 100 | |
| 100 | 100 | 100 100 | | 100 100 10 | | |
| 75×130×60 | 90×15 | 55×60 | | 105×165×60 | | |
| (Fig. 1) | (Fig | g. 2) | | (Fig. 3) | | |









(Fig. 2) (Fig. 3)

Quick selection table Earth Leakage Circuit Breakers




ELCBs


| | AF | | | 400 | AF | | |
|-----------------|----------------------------------|-------------|-----------------|-----------------------|----------------------|---------|--|
| Туре | | N-type | S-type | H-type | L-type | | |
| | | 3-pole | EBN403c | EBS403c | EBH403c | EBL403c | |
| | | 4-pole | EBN404c | EBS404c | EBH404c | EBL404c | |
| Protective fund | tion | | | Overload, short-circu | uit and ground fault | | |
| Rated current, | In | Α | | 250, 300, | 350, 400 | | |
| Rated impulse | withstand voltage, Uimp | kV | 6 | 6 | 6 | 6 | |
| Rated operatio | nal voltage, Ue | AC (V) | 220/460 | 220/460 | 220/460 | 220/460 | |
| Instantaneous | Rated residual current, I∆n | mA | 30, 100/200/500 | | | | |
| type | Residual current off-time at I∆n | sec | ≤0.1 | ≤0.1 | ≤0.1 | ≤0.1 | |
| Time delay | Rated residual current | Α | 0.1/0.4/1/2 | | | | |
| type | Intentional time delay | S | 0.5/1/1.5/2 | | | | |
| Rated short-c | ircuit breaking capacity (Ic | u) kA (Sym) | , IEC 60947-2 | | | | |
| | AC | 415/460V | 37 | 50 | 65 | 85 | |
| | | 220/250V | 50 | 75 | 85 | 125 | |
| | lcs=%×lcu | | 100 | 100 | 100 | 75 | |
| Dimensions (m | Dimensions (mm) W×H×D | | 140×257×109 | | | | |
| | | (3-pole) | (Fig. 4) | | | | |

 $^{^\}star$ For more detail see the page. Ratings 6-13page \sim 6-18page, Curves 8-4~ 8-5page and Drawings 9-12page \sim 9-14page

Note) 1. MCCBs other than 1,000/1200AF can be applied to both 50 and 60Hz.

2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

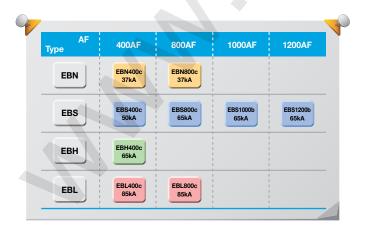

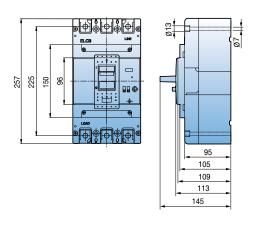


(Fig. 4)







| | 800AF | 1000AF | 1200AF | |
|---------|--------------------------------|-----------------|-----------------------|----------------------|
| N-type | S-type | L-type | S-type | S-type |
| EBN803c | EBS803c | EBL803c | EBN1003b | EBS1203b |
| - | - | - | | - |
| Over | load, short-circuit and ground | fault | Overload, short-circu | uit and ground fault |
| | 500, 630, 700, 800 | | 1000 | 1200 |
| 6 | 6 | 6 | 7(0)- | - |
| 220/460 | 220/460 | 220/460 220/460 | | 220/460 |
| | 30, 100/200/500 | | 100/200/500 | 100/200/500 |
| ≤0.1 | ≤0.1 | ≤0.1 | ≤0.1 | ≤0.1 |
| | 0.1/0.4/1/2 | | <u>-</u> | |
| | 0.5/1/1.5/2 | | - | |
| | | | | |
| 37 | 65 | 85 | 85 | 85 |
| 50 | 85 | 125 | 125 | 125 |
| 100 | 100 | 75 | - | - |
| ' | 210×280×109 | 220×56 | 5×105 | |
| | (Fig. 5) | (Fig | . 6) | |


08 80

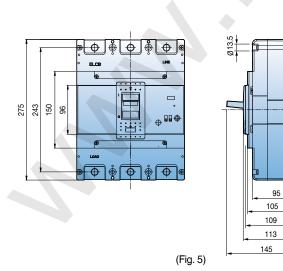

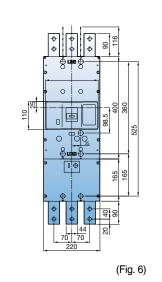



Type numbering system

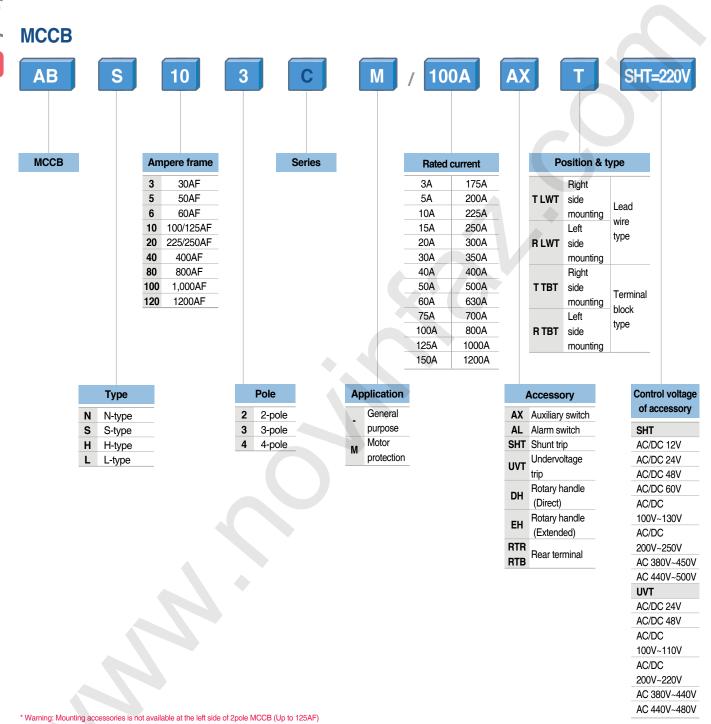

4

ELCB 100A 30mA 10 3 R AX ELCB Series Rated current Accessory **Ampere** 3 30AF 5A 200A **AX** Auxiliary switch 5 50AF 10A 225A AL Alarm switch 6 60AF 15A 250A Rotary handle 10 100/125AF 20A 300A (Direct) 20 225/250AF 30A 350A Rotary handle 40 400AF (Extended) 40A 400A 80 800AF 500A 50A Rear terminal 100 1000AF RTB 60A 630A 120 1200AF 75A 700A 100A 800A 125A 1000A 150A 1200A 175A Туре Pole Rated residual current, Intentional time delay Position & type 2 2-pole Left 30mA 30mA N N-type Lead S 3 3-pole 100mA 100mA R LWT Side Wire S-type Н 4-pole 100/200/500mA 100/200/500mA Mounting H-type type 1A, 1s 0.1/0.2/0.5/1A, 0/0.2/0.5/1s Left Terminal L-type Block 2A, 2s 0.1/0.4/1/2A, 0.5/1/1.5/2s RTBT Side Mounting ype

 $^{^{\}star}$ Warning: Mounting accessories is not available at the right side ELCB (Up to 250AF)

30AF MCCB ABE30b

ABE32b



ABE33b

Ratings


| Frame size | | | 30. | AF | | | |
|------------------------|------------|-----------|-------------------------|----------|--|--|--|
| Type and pole | | | E-ty | уре | | | |
| | 2-pole | | ABE32b | | | | |
| 3-pole | | | ABE33b | | | | |
| | 4-pole | | | | | | |
| Rated current, In | | | 3-5-10-1 | 5-20-30A | | | |
| Rated operational vo | ltage, Ue | | AC: 4 | 460V | | | |
| | | | | - | | | |
| Rated insulation volta | age, Ui | | AC: 4 | 460V | | | |
| Rated impulse withst | tand volta | ge, Uimp | 64 | (V | | | |
| Rated short-circuit b | reaking | | E-ty | уре | | | |
| capacity, Icu | AC | 690V | | - | | | |
| IEC 60947-2 (Icu) | | 480/500V | - | | | | |
| | | 460V | 2.5kA | | | | |
| | | 415V | 2.5kA | | | | |
| | | 380V | kA | | | | |
| | | 220/250V | 5kA | | | | |
| | DC | 500V (3P) | - | | | | |
| | | 250V (2P) | <u>-</u> | | | | |
| lcs=%×lcu | | | 50% | | | | |
| Protective function | | | Overload, short-circuit | | | | |
| Type of trip unit | | | Hydraulic-magnetic | | | | |
| Magnetic trip range | | | 12ln | | | | |
| Life cycle Note2) | Mechani | ical | 8,500 operations | | | | |
| | Electrica | d | 1,500 operations | | | | |
| Connection | Standard | d | Front connection | | | | |
| | Optional | | - | | | | |
| | | | - | | | | |
| Mounting | Standard | b | Screw | fixing | | | |
| Dimensions (mm) | | Pole | 2p | 3р | | | |
| d | 1 | а | 50 | 75 | | | |
| a c2 c1 | | b | 96 | 96 | | | |
| | | c1 Note1) | 60 | 60 | | | |
| | | c2 Note1) | - | - | | | |
| V Ma Ma V I | • | d | 80 | 80 | | | |
| Weight, kg | | Standard | 0.5 | 0.7 | | | |
| Certification | | Pole | 2p | 3р | | | |
| CE marking | | (€ | 0 | 0 | | | |
| | | | | | | | |

For more information


- Accessories ▶ 7-1 page • Trip curves ▶ 8-1 page • Drawings ▶ 9-1 page • Connection and mounting ▶10-2 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABE type (2.5kA/460V) | | | |
|-----------------------|-----------|-----------|--|
| Rated current, In | 2-pole | 3-pole | |
| 3 A | ABE32b/3 | ABE33b/3 | |
| 5 A | ABE32b/5 | ABE33b/5 | |
| 10 A | ABE32b/10 | ABE33b/10 | |
| 15 A | ABE32b/15 | ABE33b/15 | |
| 20 A | ABE32b/20 | ABE33b/20 | |
| 30 A | ABE32b/30 | ABE33b/30 | |

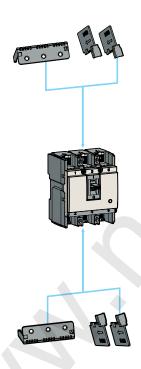

Accessories



Electrical auxiliaries

| AX | Auxiliary switch |
|-----|------------------|
| AL | Alarm switch |
| SHT | Shunt trip |



Maximum possibilities

| T-position | One of above auxiliaries |
|------------|--------------------------|
| R-position | Option of AX or AL |

Note) For more detail see 7-1 page





External accessories

| ABE30b | Name |
|--------|--------------------|
| B-03B | Insulation barrier |
| TBS23 | Short type |

Note) For more detail see 7-9 ~ 7-26 page

30AF MCCB ABS30c

ABS32c





ABS34c

 Accessories ▶ 7-1 page • Trip curves ▶ 8-1 page • Drawings ▶ 9-2 page • Connection and mounting ▶10-2 page

Ratings

| _ | | | | 00.45 | | |
|---------------------------------------|------------|-------------------------|-------------------|------------------------|------------|--|
| Frame size | | 30AF | | | | |
| Type and pole 2-pole 3-pole | | | S-type | | | |
| | | ABS32c | | | | |
| | | | ABS33c | | | |
| | 4-pole | | | ABS34c | | |
| Rated current, In | | | (3 | 3-5-10)Note1)-15-20-30 |)A | |
| Rated operational vo | oltage, Ue |) | AC: 690V | | | |
| | | | | DC: 500V | | |
| Rated insulation vol | tage, Ui | | | AC: 1000V | | |
| Rated impulse withs | tand volta | age, Uimp | | 8kV | | |
| Rated short-circuit I | breaking | | VAN | S-type | | |
| capacity, Icu | AC | 690V | | 2.5kA | | |
| IEC 60947-2 (lcu) | | 480/500V | | 7.5 (5)kA | | |
| | | 460V | | 14 (10)kA | | |
| | | 415V | | 14 (10)kA | | |
| | | 380V | | 18 (14)kA | | |
| | | 220/250V | | 30 (25)kA | | |
| | DC | 500V (3P) | 5kA | | | |
| | | 250V (2P) | 5kA | | | |
| lcs=%×lcu | | 100% | | | | |
| Protective function | | Overload, short-circuit | | | | |
| Type of trip unit | | | Thermal-magnetic | | | |
| Magnetic trip range | | | 400A | | | |
| Life cycle Note4) | Mechan | ical | | 25,000 operations | | |
| | Electrica | al | 10,000 operations | | | |
| Connection | Standar | d | Front connection | | | |
| | Optiona | I | Rear connection | | | |
| | | | Plug-in | | | |
| Mounting | Standar | d | | Screw fixing | | |
| Dimensions (mm) | | Pole | 2p | 3р | 4p | |
| _ d | - | a | 50 | 75 | 100 | |
| a c1 | | b | 130 | 130 | 130 | |
| | | c1 Note2) | 60 | 60 | 60 | |
| | | c2 Note2) | 64 | 64 | 64 | |
| | | d | 82 | 82 | 82 | |
| | | Standard | 0.5 | 0.7 | 0.9 | |
| Weight, kg | | | | | | |
| | | | | 3p | 4p | |
| Weight, kg Certification CE marking | | Pole (€ | 2 p ○ | 3 p ○ | 4 p | |


- Note) 1. The short-circuit breaking capacities in () are applied to the rated current in (3, 5, 10A)
 2. Depth by door cut size: c1 for large cut, c2 for small cut
 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 4. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABS type (10kA/460V) | | | |
|----------------------|-----------|-----------|-----------|
| Rated current, In | 2-pole | 3-pole | 4-pole |
| 3 A | ABS32c/3 | ABS33c/3 | ABS34c/3 |
| 5 A | ABS32c/5 | ABS33c/5 | ABS34c/5 |
| 10 A | ABS32c/10 | ABS33c/10 | ABS34c/10 |

| ABS type (14kA/460V) | | | |
|----------------------|-----------|-----------|-----------|
| Rated current, In | 2-pole | 3-pole | 4-pole |
| 15 A | ABS32c/15 | ABS33c/15 | ABS34c/15 |
| 20 A | ABS32c/20 | ABS33c/20 | ABS34c/20 |
| 30 A | ABS32c/30 | ABS33c/30 | ABS34c/30 |

Accessories

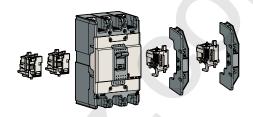

Electrical auxiliaries

| AX | Auxiliary switch | |
|-------|--------------------|--|
| AL | Alarm switch | |
| AX+AL | Combination switch | |
| SHT | Shunt trip | |
| UVT | Undervoltage trip | |



Maximum possibilities

| T-position | One of above auxiliaries | |
|------------|-----------------------------|--|
| R-position | Option of AX or AL or AX+AL | |

Note) For more detail see 7-1 page




| ABS30c | Name | |
|-------------|--|--|
| IB13 | Insulation barrier | |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type | |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type | |
| N-30c | Rotary handle (Direct) - applicable for either 2, 3pole | |
| DH100 | Rotary handle (Direct) | |
| DHK100 | Rotary handle (Direct, key lock) | |
| EH100 | Rotary handle (Extended) | |
| RTR1 | Rear terminal (Round) | |
| PB-A3 | Plug-in kit | |
| Handle lock | | |
| MOP-M1 | Remote operation | |

- Note) For more detail see 7-9 7-26 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

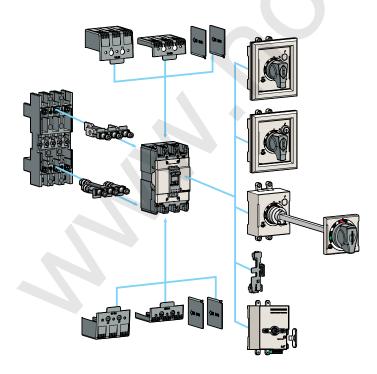

50AF MCCB ABN50c, ABS50c, ABH50c

Ratings





ABS53c



| | 1 | |
|--|------|---|
| The state of the s | - 00 | 1 |
| 101 | | |

| For more inform | lation |
|-----------------|------------|
| Accessories | ▶ 7-1 page |
| Trip curves | ▶ 8-1 page |

• Drawings ▶ 9-2 page • Connection and mounting ▶10-2 page

| _ | | | | | | | | | | | |
|-------------------------------|------------|-----------|-----------------------------|--------|-----------------|---------|---------|--------|--------|------|----------|
| Frame size | | | | | | | 50AF | | | | |
| Type and pole | | | | N-type | ! | | S-type | | H-type | | ; |
| | 2-pole | | ABN52c | | ABS52c | | ABH52c | | | | |
| | 3-pole | | ABN53c | | ABS53c | | | ABH53c | | | |
| 4-pole | | - | ABN54 | С | V | ABS54 | С | 1 | ABH54 | С | |
| Rated current, In | | | 15-20-30-40-50A | | | | | | | | |
| Rated operational voltage, Ue | | | AC: 690V | | | | | | | | |
| | | | | 4 | Ĺ | C: 500 | V | | | | |
| Rated insulation voltage, Ui | | | | | A | C: 1000 | V | | | | |
| Rated impulse withs | tand volta | ge, Uimp | | | | | 8kV | | | | |
| Rated short-circuit breaking | | | N-type | | | S-type | • | | H-type | | |
| capacity, Icu | AC | 690V | | 2.5kA | | | 5kA | | | 10kA | |
| IEC 60947-2 (lcu) | | 480/500V | | 7.5kA | | 10kA | | | 35kA | | |
| | | 460V | | 14kA | | 18kA | | 50kA | | | |
| | | 415V | 14kA | | 18kA | | 50kA | | | | |
| | | 380V | 18kA | | 22kA | | 50kA | | | | |
| | | 220/250V | 30kA | | 35kA | | 100kA | | | | |
| | DC | 500V (3P) | 5kA | | 10kA | | 30kA | | | | |
| | | 250V (2P) | 5kA | | 10kA | | 30kA | | | | |
| lcs=%×lcu | | | 100% | | 100% | | 100% | | | | |
| Protective function | | | Overload, short-circuit | | | | | | | | |
| Type of trip unit | | | Thermal-magnetic | | | | | | | | |
| Magnetic trip range | | | 12×In (30A and under: 400A) | | | | | | | | |
| Life cycle Note3) | Mechan | ical | 25,000 operations | | | | | | | | |
| | Electrica | ıl | | | | 10,00 | 0 oper | ations | | | |
| Connection | Standar | d | Front connection | | | | | | | | |
| | Optional | | | | Rear connection | | | ection | | | |
| | | | Plug-in | | | | | | | | |
| Mounting | Standar | d | | | | Sc | rew fix | ing | | | |
| Dimensions (mm) | | Pole | 2p | Зр | 4p | 2p | Зр | 4p | 2p | Зр | 4p |
| _ d | | а | 50 | 75 | 100 | 50 | 75 | 100 | 60 | 90 | 120 |
| | | b | | 130 | | 130 | | | 155 | | |
| | | c1 Note1) | 60 | | | 60 | | | 60 | | |
| | | c2 Note1) | | 64 | | | 64 | | | 64 | |
| | | d | | 82 | | | 82 | | | 82 | |
| Weight, kg | | Standard | 0.5 | 0.7 | 0.9 | 0.5 | 0.7 | 0.9 | 0.7 | 1 | 1.2 |
| Certification | | Pole | 2p | Зр | 4p | 2p | Зр | 4p | 2p | Зр | 4p |
| CE marking | | (€ | | 0 | | | 0 | | | 0 | |


Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
3. Life cycle means not guarantee but limitation
(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types


| ABN type (14kA/460V) | | | | |
|----------------------|-----------|-----------|-----------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 15 A | ABN52c/15 | ABN53c/15 | ABN54c/15 | |
| 20 A | ABN52c/20 | ABN53c/20 | ABN54c/20 | |
| 30 A | ABN52c/30 | ABN53c/30 | ABN54c/30 | |
| 40 A | ABN52c/40 | ABN53c/40 | ABN54c/40 | |
| 50 A | ABN52c/50 | ABN53c/50 | ABN54c/50 | |

| ABS type (18kA/460V) | | | | |
|----------------------|-----------|-----------|-----------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 15 A | ABS52c/15 | ABS53c/15 | ABS54c/15 | |
| 20 A | ABS52c/20 | ABS53c/20 | ABS54c/20 | |
| 30 A | ABS52c/30 | ABS53c/30 | ABS54c/30 | |
| 40 A | ABS52c/40 | ABS53c/40 | ABS54c/40 | |
| 50 A | ABS52c/50 | ABS53c/50 | ABS54c/50 | |

| ABH type (50kA/460V) | | | | | |
|----------------------|-----------|-----------|-----------|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | |
| 15 A | ABH52c/15 | ABH53c/15 | ABH54c/15 | | |
| 20 A | ABH52c/20 | ABH53c/20 | ABH54c/20 | | |
| 30 A | ABH52c/30 | ABH53c/30 | ABH54c/30 | | |
| 40 A | ABH52c/40 | ABH53c/40 | ABH54c/40 | | |
| 50 A | ABH52c/50 | ABH53c/50 | ABH54c/50 | | |

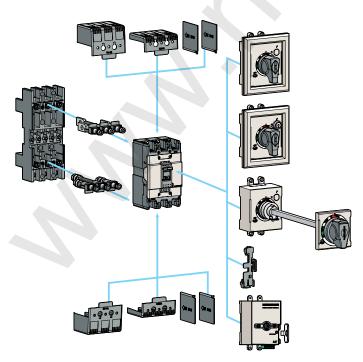

Accessories

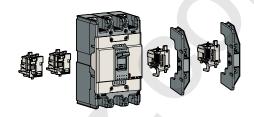

Electrical auxiliaries


| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |
| | |



Maximum possibilities

| T-position | One of above auxiliaries |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| ABN50c ABS50c | ABH50c | Name |
|------------------|---------|--|
| IB13 | IB23 | Insulation barrier |
| TCL13 | TCL23 | Terminal cover (Long) - Single type, D-handle type, N-handle type |
| TCS13 | TCS23 | Terminal cover (Short) - Single type, D-handle type, N-handle type |
| N-30c | N-40c | Rotary handle (Direct) - applicable for either 2, 3pole |
| DH100 | DH125 | Rotary handle (Direct) |
| DHK100 | DHK125 | Rotary handle (Direct, key lock) |
| EH100 | EH125 | Rotary handle (Extended) |
| - | RTB2 | Rear terminal (Bar) |
| RTR1 | RTR2 | Rear terminal (Round) |
| PB-A3 | PB-C3 | Plug-in kit |
| Hand | le lock | |
| MOP-M1 | MOP-M2 | Remote operation |

- Note) For more detail see 7-9 ~ 7-26 page
 Single type: This cover is used without auxiliary handle.
 D-handle type: This cover is used with D-handle.
 N-handle type: This cover is used with N-handle.

60AF MCCB ABN60c, ABS60c

Ratings







ABS64c

| Frame size | | | | | 60 | AF | | · · |
|-------------------------------|-----------|-----------|-----------------------------|--------|-------------|--------------|--------|-----|
| Type and pole | | | | N-type | | | S-type | |
| | 2-pole | | | ABN62c | | ABS62c | | |
| | 3-pole | | | ABN63c | | | ABS63c | |
| | 4-pole | | | ABN64c | | | ABS64c | |
| Rated current, In | | | | | 15-20-30-4 | 40-50-60A | | |
| Rated operational voltage, Ue | | | | AC: 6 | 690V | | | |
| | | | | | DC: | 500V | | |
| Rated insulation volta | age, Ui | | | | AC: 1 | V000 | | |
| Rated impulse withst | and volta | ge, Uimp | | | 8k | κV | | |
| Rated short-circuit b | reaking | | | N-type | | | S-type | |
| capacity, Icu | AC | 690V | | 2.5kA | | | 5kA | |
| IEC 60947-2 (lcu) | | 480/500V | | 7.5kA | | | 10kA | |
| | | 460V | | 14kA | | | 18kA | |
| | | 415V | | 14kA | | | 18kA | |
| | | 380V | | 18kA | | | 22kA | |
| | | 220/250V | | 30kA | | | 35kA | |
| | DC | 500V (3P) | | 5kA | | | 10kA | |
| | | 250V (2P) | | 5kA | | 10kA | | |
| lcs=%xlcu | | | | 100% | | | 100% | |
| Protective function | | | | C | Overload, s | short-circui | t | |
| Type of trip unit | | | | | Thermal- | magnetic | | |
| Magnetic trip range | | | 12×In (30A and under: 400A) | | | | | |
| Life cycle Note3) | Mechani | cal | 25,000 operations | | | | | |
| | Electrica | I | 10,000 operations | | | | | |
| Connection | Standard | i | Front connection | | | | | |
| | Optional | | Rear connection | | | | | |
| | | | | | Plu | ıg-in | | |
| Mounting | Standard | i | | | Screw | fixing | | |
| Dimensions (mm) | | Pole | 2p | 3р | 4p | 2p | 3р | 4p |
| d | | а | 50 | 75 | 100 | 50 | 75 | 100 |
| a c2 | | b | | 130 | | | 130 | |
| | | c1 Note1) | | 60 | | | 60 | |
| | | c2 Note1) | | 64 | | | 64 | |
| | | d | | 82 | | | 82 | |
| Weight, kg | | Standard | 0.5 | 0.7 | 0.9 | 0.5 | 0.7 | 0.9 |
| Certification | | Pole | | 2p | | | Зр | |

For more information

- Accessories ▶ 7-1 page • Trip curves ▶ 8-1 page • Drawings ▶ 9-2 page • Connection and mounting ▶10-2 page

(€


CE marking

- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 3. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)


Breaker types

| ABN type (14kA/460V) | | | | |
|----------------------|-----------|-----------|-----------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 15 A | ABN62c/15 | ABN63c/15 | ABN64c/15 | |
| 20 A | ABN62c/20 | ABN63c/20 | ABN64c/20 | |
| 30 A | ABN62c/30 | ABN63c/30 | ABN64c/30 | |
| 40 A | ABN62c/40 | ABN63c/40 | ABN64c/40 | |
| 50 A | ABN62c/50 | ABN63c/50 | ABN64c/50 | |
| 60 A | ABN62c/60 | ABN63c/60 | ABN64c/60 | |

| ABS type (18kA/460V) | | | | |
|----------------------|-----------|-----------|-----------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 15 A | ABS62c/15 | ABS63c/15 | ABS64c/15 | |
| 20 A | ABS62c/20 | ABS63c/20 | ABS64c/20 | |
| 30 A | ABS62c/30 | ABS63c/30 | ABS64c/30 | |
| 40 A | ABS62c/40 | ABS63c/40 | ABS64c/40 | |
| 50 A | ABS62c/50 | ABS63c/50 | ABS64c/50 | |
| 60 A | ABS62c/60 | ABS63c/60 | ABS64c/60 | |

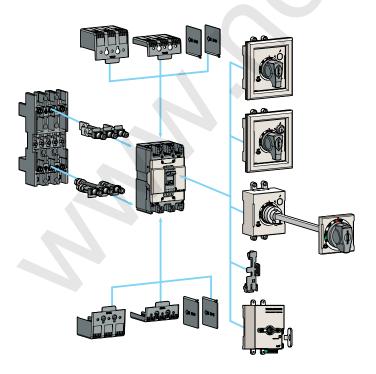

Accessories

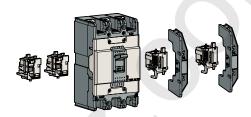


Electrical auxiliaries

| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |



Maximum possibilities

| T-position | One of above auxiliaries |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |



| ABN50c ABS50c | Name | | | |
|------------------|--|--|--|--|
| IB13 | Insulation barrier | | | |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type | | | |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type | | | |
| N-30c | Rotary handle (Direct) - applicable for either 2, 3pole | | | |
| DH100 | Rotary handle (Direct) | | | |
| DHK100 | Rotary handle (Direct, key lock) | | | |
| EH100 | Rotary handle (Extended) | | | |
| RTB1 | Rear terminal (Bar) | | | |
| RTR1 | Rear terminal (Round) | | | |
| PB-A3 | Plug-in kit | | | |
| handle lock | | | | |
| MOP-M1 | Remote operation | | | |

- Note) For more detail see 7-9 ~ 7-26 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

100AF MCCB ABN100c, ABN100e

Ratings



ABN102c



ABN103c



ABN104c

| Frame size | | | | 100AF | | | |
|-----------------------|------------|-----------|-------------------------|---------------------------|-----------|--|--|
| Type and pole | | | | N-type | | | |
| | 2-pole | | ABN102c | | ABN102e | | |
| | 3-pole | | ABN103c | | ABN103e | | |
| | 4-pole | | ABN104c | | ABN104e | | |
| Rated current, In | | | 15-2 | 15-20-30-40-50-60-75-100A | | | |
| Rated operational vo | oltage, Ue | ; | | AC: 690V | | | |
| | | | | DC: 500V | | | |
| Rated insulation volt | age, Ui | | | AC: 1000V | | | |
| Rated impulse withs | tand volta | age, Uimp | | 8kV | | | |
| Rated short-circuit b | oreaking | | | N-type | | | |
| capacity, Icu | AC | 690V | 5kA | | 7.5 (5)kA | | |
| IEC 60947-2 (lcu) | | 480/500V | 10kA | | 14 (10)kA | | |
| | | 460V | 18kA | | 31 (18)kA | | |
| | | 415V | 18kA | | 31 (18)kA | | |
| | | 380V | 22kA | | 31 (22)kA | | |
| | | 220/250V | 35kA | | 65 (35)kA | | |
| | DC | 500V (3P) | 10kA | | 15 (10)kA | | |
| | | 250V (2P) | 10kA | | 15 (10)kA | | |
| lcs=%×lcu | | · | 100% | 0% () | | | |
| Protective function | 1 | | Overload, short-circuit | | | | |
| Type of trip unit | | | Thermal-magnetic | | | | |
| Magnetic trip range | | | 400A | | | | |
| Life cycle Note4) | Mechan | ical | 25,000 operations | | | | |
| | Electrica | al | | 10,000 operations | | | |
| Connection | Standar | d | | Front connection | | | |
| | Optiona | l | | Rear connection | | | |
| | | | | Plug-in | | | |
| Mounting | Standar | d | | Screw fixing | | | |
| Dimensions (mm) | | Pole | 2p | 3p | 4p | | |
| d _c2 | 1 | a | 50 | 75 | 100 | | |
| a c1 | | b | 130 | 130 | 130 | | |
| | | c1 Note1) | 60 | 60 | 60 | | |
| | | c2 Note1) | 64 | 64 | 64 | | |
| | | d | 82 | 82 | 82 | | |
| Weight, kg | | Standard | 0.5 | 0.7 | 0.9 | | |
| Certification | | Pole | 2p | 3р | 4p | | |
| CE marking | | (€ | 0 | 0 | 0 | | |

For more information


| Accessories | ▶ 7-1 page |
|-------------------------|------------|
| Trip curves | ▶ 8-1 page |
| Drawings | ▶ 9-2 page |
| Connection and mounting | ▶10-2 nage |

Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
3. The lcs(Service breaking capacity) of ABN100e are in ()
4. Life cycle means not guarantee but limitation
(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)


Breaker types

| ABN-c type (18kA/460V) | | | | | | |
|--|-------------|-------------|-------------|--|--|--|
| Rated current, In 2-pole 3-pole 4-pole | | | | | | |
| 15 A | ABN102c/15 | ABN103c/15 | ABN104c/15 | | | |
| 20 A | ABN102c/20 | ABN103c/20 | ABN104c/20 | | | |
| 30 A | ABN102c/30 | ABN103c/30 | ABN104c/30 | | | |
| 40 A | ABN102c/40 | ABN103c/40 | ABN104c/40 | | | |
| 50 A | ABN102c/50 | ABN103c/50 | ABN104c/50 | | | |
| 60 A | ABN102c/60 | ABN103c/60 | ABN104c/60 | | | |
| 75 A | ABN102c/75 | ABN103c/75 | ABN104c/75 | | | |
| 100 A | ABN102c/100 | ABN103c/100 | ABN104c/100 | | | |

| ABN-e type (31kA/460V) | | | | | | |
|--|-------------|-------------|-------------|--|--|--|
| Rated current, In 2-pole 3-pole 4-pole | | | | | | |
| 15 A | ABN102e/15 | ABN103e/15 | ABN104e/15 | | | |
| 20 A | ABN102e/20 | ABN103e/20 | ABN104e/20 | | | |
| 30 A | ABN102e/30 | ABN103e/30 | ABN104e/30 | | | |
| 40 A | ABN102e/40 | ABN103e/40 | ABN104e/40 | | | |
| 50 A | ABN102e/50 | ABN103e/50 | ABN104e/50 | | | |
| 60 A | ABN102e/60 | ABN103e/60 | ABN104e/60 | | | |
| 75 A | ABN102e/75 | ABN103e/75 | ABN104e/75 | | | |
| 100 A | ABN102e/100 | ABN103e/100 | ABN104e/100 | | | |

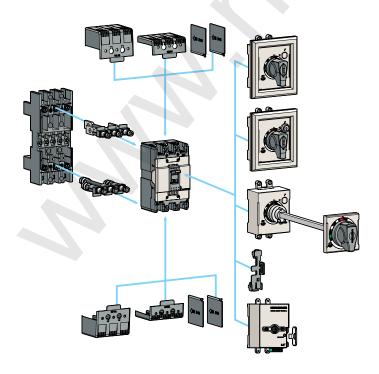

Accessories

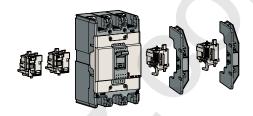

Electrical auxiliaries

| Auxiliary switch |
|--------------------|
| Alarm switch |
| Combination switch |
| Shunt trip |
| Undervoltage trip |
| |



Maximum possibilities

| T-position | One of above auxiliaries |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| ABN100c | Name |
|-------------|--|
| IB13 | Insulation barrier |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type |
| N-30c | Rotary handle (Direct) - applicable for either 2, 3pole |
| DH100 | Rotary handle (Direct) |
| DHK100 | Rotary handle (Direct, key lock) |
| EH100 | Rotary handle (Extended) |
| RTB1 | Rear terminal (Bar) |
| RTR1 | Rear terminal (Round) |
| PB-A3 | Plug-in kit |
| Handle lock | |
| MOP-M1 | Remote operation |

- Note) For more detail see 7-9 ~ 7-26 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

125AF MCCB ABS125c, ABH125c, ABL125c

ABS102c



ABS103c



For more information

| Accessories | ▶ 7-1 page |
|---------------------------|------------|
| Trip curves | ▶ 8-2 page |
| Drawings | ▶ 9-3 page |
| • Connection and mounting | 10-2 nage |

Ratings

| Frame size | | | | | | 1 | 25A | | | | |
|-----------------------|---------------------------|-----------|-------------------------|----------|-------|---------|-----------|-------------|-------|---------|-----|
| Type and pole | | | | N-type | | | H-type | | | L-type | |
| | 2-pole | pole | | BS102 | c | ABH102c | | ABL102c | | | |
| | 3-pole | 3-pole | | ABS103c | | ABH103c | | A | BL103 | c | |
| 4-pole | | | Α | BS104 | С | А | BH104 | lc | Α | BL104 | С |
| Rated current, In | | | | | 15-20 | -30-40- | 50-60- | 75-100- | -125A | | |
| Rated operational vo | oltage, Ue | • | | AC: 690V | | | | | | | |
| | | | | | 4 | Ď | C: 500 | V | | | |
| Rated insulation volt | tage, Ui | | | | | A | C: 1000 | V | | | |
| Rated impulse withs | tand volta | age, Uimp | | | | | 8kV | | | | |
| Rated short-circuit I | breaking | | | N-type | | | H-type | | | L-type | |
| capacity, Icu | AC | 690V | | 8kA | | | 10kA | | 1 | 0 (10)k | Α |
| IEC 60947-2 (lcu) | | 480/500V | | 26kA | | | 35kA | | 3 | 5 (35)k | Α |
| | | 460V | | 37kA | | | 50kA | | 6 | 0 (50)k | A |
| | | 415V | | 37kA | | | 50kA | | 6 | 0 (50)k | Α |
| | | 380V | | 42kA | | | 50kA | | 6 | 0 (50)k | Α |
| | | 220/250V | 85kA | | | 100kA | | 125 (100)kA | | | |
| DC | | 500V (3P) | 20kA | | 30kA | | 30 (30)kA | | | | |
| | | 250V (2P) | | 20kA | | | 30kA | | 3 | 0 (30)k | Α |
| lcs=%×lcu | | | | 100% | | | 100% | | | () | |
| Protective function | 1 | | Overload, short-circuit | | | | | | | | |
| Type of trip unit | rip unit Thermal-magnetic | | | | | | | | | | |
| Magnetic trip range | | | | | 12× | In (30A | and u | nder: 4 | 00A) | | |
| Life cycle Note4) | Mechan | ical | | | | 25,00 | 0 oper | ations | | | |
| | Electrica | al | | | | 10,00 | 0 oper | ations | | | |
| Connection | Standar | d | Front connection | | | | | | | | |
| | Optiona | I | Rear connection | | | | | | | | |
| | | | | | | | Plug-ir | | | | |
| Mounting | Standar | d | | | | Sc | rew fix | ing | | | |
| Dimensions (mm) | | Pole | 2p | Зр | 4p | 2p | 3р | 4p | 2p | 3р | 4p |
| d _c2 |] | a | 60 | 90 | 120 | 60 | 90 | 120 | 60 | 90 | 120 |
| a c1 | | b | | 155 | | | 155 | | | 155 | |
| | | c1 Note1) | | 60 | | | 60 | | | 60 | |
| | | c2 Note1) | | 64 | | | 64 | | | 64 | |
| | | d | 0 - | 82 | 4.0 | 0.7 | 82 | 4.0 | 0 = | 82 | 4.0 |
| Weight, kg | | Standard | 0.7 | 1 | 1.2 | 0.7 | 1 | 1.2 | 0.7 | 1 | 1.2 |
| Certification | | Pole | 2p | Зр | 4p | 2p | 3р | 4p | 2p | Зр | 4p |
| CE marking | | (€ | | 0 | | | 0 | | | 0 | |

- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 3. The lcs(Service breaking capacity) of ABL125AF are in ()
 4. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)


Breaker types

| ABS type (37kA/460V) | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | |
| 15 A | ABS102c/15 | ABS103c/15 | ABS104c/15 | | | |
| 20 A | ABS102c/20 | ABS103c/20 | ABS104c/20 | | | |
| 30 A | ABS102c/30 | ABS103c/30 | ABS104c/30 | | | |
| 40 A | ABS102c/40 | ABS103c/40 | ABS104c/40 | | | |
| 50 A | ABS102c/50 | ABS103c/50 | ABS104c/50 | | | |
| 60 A | ABS102c/60 | ABS103c/60 | ABS104c/60 | | | |
| 75 A | ABS102c/75 | ABS103c/75 | ABS104c/75 | | | |
| 100 A | ABS102c/100 | ABS103c/100 | ABS104c/100 | | | |
| 125 A | ABS102c/125 | ABS103c/125 | ABS104c/125 | | | |

| ABH type (50kA/460V) | | | | | | |
|--|-------------|-------------|-------------|--|--|--|
| Rated current, In 2-pole 3-pole 4-pole | | | | | | |
| 15 A | ABH102c/15 | ABH103c/15 | ABH104c/15 | | | |
| 20 A | ABH102c/20 | ABH103c/20 | ABH104c/20 | | | |
| 30 A | ABH102c/30 | ABH103c/30 | ABH104c/30 | | | |
| 40 A | ABH102c/40 | ABH103c/40 | ABH104c/40 | | | |
| 50 A | ABH102c/50 | ABH103c/50 | ABH104c/50 | | | |
| 60 A | ABH102c/60 | ABH103c/60 | ABH104c/60 | | | |
| 75 A | ABH102c/75 | ABH103c/75 | ABH104c/75 | | | |
| 100 A | ABH102c/100 | ABH103c/100 | ABH104c/100 | | | |
| 125 A | ABH102c/125 | ABH103c/125 | ABH104c/125 | | | |

| | ABL type (60kA/460V) | | | | |
|-------------------|----------------------|-------------|-------------|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | |
| 15 A | ABL102c/15 | ABL103c/15 | ABL104c/15 | | |
| 20 A | ABL102c/20 | ABL103c/20 | ABL104c/20 | | |
| 30 A | ABL102c/30 | ABL103c/30 | ABL104c/30 | | |
| 40 A | ABL102c/40 | ABL103c/40 | ABL104c/40 | | |
| 50 A | ABL102c/50 | ABL103c/50 | ABL104c/50 | | |
| 60 A | ABL102c/60 | ABL103c/60 | ABL104c/60 | | |
| 75 A | ABL102c/75 | ABL103c/75 | ABL104c/75 | | |
| 100 A | ABL102c/100 | ABL103c/100 | ABL104c/100 | | |
| 125 A | ABL102c/125 | ABL103c/125 | ABL104c/125 | | |

Accessories

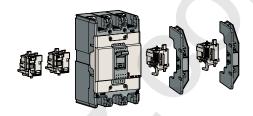

Electrical auxiliaries


| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |
| | |



Maximum possibilities

| T-position | One of above auxiliaries |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| External accessories | | | | |
|----------------------|--|--|--|--|
| ABS125c ABH125c | Name | | | |
| IB13 | Insulation barrier | | | |
| TCL23 | Terminal cover (Long) - Single type, D-handle type, N-handle type | | | |
| TCS23 | Terminal cover (Short) - Single type, D-handle type, N-handle type | | | |
| N-40c | Rotary handle (Direct) - applicable for either 2, 3pole | | | |
| DH125 | Rotary handle (Direct) | | | |
| DHK125 | Rotary handle (Direct, key lock) | | | |
| EH125 | Rotary handle (Extended) | | | |
| RTB2 | Rear terminal (Bar) | | | |
| RTR2 | Rear terminal (Round) | | | |
| PB-C3 | Plug-in kit | | | |
| Handle lock | | | | |
| MOP-M2 | Remote operation | | | |

- Note) For more detail see 7-9 ~ 7-26 page
 Single type: This cover is used without auxiliary handle.
 D-handle type: This cover is used with D-handle.
 N-handle type: This cover is used with N-handle.

250AF MCCB

ABN250c, ABS250c, ABH250c, ABL250c

ABS202c





ABS204c

For more information

| Accessories | ▶ 7-1 page |
|-------------------------|------------|
| Trip curves | ▶ 8-3 page |
| Drawings | ▶ 9-4 page |
| Connection and mounting | ▶10-2 page |

Ratings

| Frame size | | | | | | | | 250 |)AF | | | | | |
|----------------------------|------------|-----------|------------------------------|----------|------|-----|---------------|--------|-------------|-------|-----|-----|--------|-----|
| Type and pole | | | ı | l-typ | е | 5 | S-type | е | F | l-typ | е | 1 | typ | е |
| | 2-pole | | A | 3N20 | 2c | AE | 3 S2 0 | 2c | AE | 3H20 | 2c | Al | BL20 | 2c |
| | 3-pole | | A | 3N20 | 3с | AE | 3S20 | 3c | AE | 3H20 | 3c | Al | BL20 | 3с |
| | 4-pole | | A | 3N20 | 4c | AE | 3S20 | 4c | AE | 3H20 | 4c | Al | BL20 | 4c |
| Rated current, In | | | 100-125-150-175-200-225-250A | | | | | | | | | | | |
| Rated operational vo | oltage, Ue | | | AC: 690V | | | | | | | | | | |
| | | | | | | | | DC: | 500V | | | | | |
| Rated insulation volt | age, Ui | | | | | | | AC: 1 | 000V | ' | | | | |
| Rated impulse withs | tand volta | ge, Uimp | | | | | | 8 | κV | | | | | |
| Rated short-circuit b | oreaking | | 1 | l-typ | е | 5 | S-type | е | H | l-typ | е | L | typ | 9 |
| capacity, Icu | AC | 690V | | 8kA | | | 8kA | | | 10kA | | 10 | (10) | kA |
| IEC 60947-2 (lcu) | | 480/500V | | 18kA | | | 26kA | | | 35kA | | 35 | (35) | kA |
| | | 460V | | 26kA | | | 37kA | | | 50kA | | 60 | (50) | kA |
| | | 415V | | 26kA | | | 37kA | | | 50kA | | 6 | 60 (50 |)) |
| | | 380V | | 30kA | | | 42kA | | | 50kA | | 6 | 60 (50 |)) |
| | | 220/250V | 65kA | | 85kA | | 100kA | | 125 (100)kA | | | | | |
| | DC | 500V (3P) | | 10kA | | | 20kA | | | 30kA | | 30 | (30) | kA |
| | | 250V (2P) | | 10kA | | | 20kA | | | 30kA | | 30 | (30) | kA |
| lcs=%×lcu | | | | 100% | • | | 100% |) | | 100% | • | | () | |
| Protective function | | | | | | (| Overlo | oad, s | short- | circu | it | | | |
| Type of trip unit | | | Thermal-magnetic | | | | | | | | | | | |
| Magnetic trip range | | | 12×In | | | | | | | | | | | |
| Life cycle Note4) | Mechan | ical | | | | | 25,0 | 000 o | perat | ions | | | | |
| | Electrica | ıl | | | | | 10,0 | 000 o | perat | ions | | | | |
| Connection | Standar | d | | | | | Fro | nt co | nnect | tion | | | | |
| | Optional | | | | | | Rea | ar co | nnect | ion | | | | |
| | | | | | | | | Plu | g-in | | | | | |
| Mounting | Standar | d | Screw fixing | | | | | | | | | | | |
| Dimensions (mm) | | Pole | 2р | Зр | 4p | 2р | Зр | 4p | 2р | Зр | 4p | 2р | Зр | 4p |
| d | 1 | а | 105 | 105 | 140 | 105 | 105 | 140 | 105 | 105 | 140 | 105 | 105 | 140 |
| a c2 c1 | | b | | 165 | | | 165 | | 165 | | 165 | | | |
| | | c1 Note1) | | 60 | | | 60 | | 60 | | | 60 | | |
| | | c2 Note1) | | 64 | | 64 | | | 64 | | 64 | | | |
| | | d | | 87 | | | 87 | | | 87 | | | 87 | |
| Weight, kg | | Standard | 1.1 | 1.2 | 1.6 | 1.1 | 1.2 | 1.6 | 1.1 | 1.2 | 1.6 | 1.1 | 1.2 | 1.6 |
| Certification | | Pole | 2p | Зр | 4p | 2р | Зр | 4p | 2р | Зр | 4p | 2p | Зр | 4p |
| CE marking | | (€ | | 0 | | | 0 | | | 0 | | | 0 | |

- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 3. The lcs(Service breaking capacity) of ABL250AF are in ()
 4. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types


| ABN type (26kA/460V) | | | | |
|----------------------|-------------|-------------|-------------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 100 A | ABN202c/100 | ABN203c/100 | ABN204c/100 | |
| 125 A | ABN202c/125 | ABN203c/125 | ABN204c/125 | |
| 150 A | ABN202c/150 | ABN203c/150 | ABN204c/150 | |
| 175 A | ABN202c/175 | ABN203c/175 | ABN204c/175 | |
| 200 A | ABN202c/200 | ABN203c/200 | ABN204c/200 | |
| 225 A | ABN202c/225 | ABN203c/225 | ABN204c/225 | |
| 250 A | ABN202c/250 | ABN203c/250 | ABN204c/250 | |

| | ABS type (37kA/460V) | | | | | |
|-------------------|--|-------------|-------------|--|--|--|
| Rated current, In | Rated current, In 2-pole 3-pole 4-pole | | | | | |
| 100 A | ABS202c/100 | ABS203c/100 | ABS204c/100 | | | |
| 125 A | ABS202c/125 | ABS203c/125 | ABS204c/125 | | | |
| 150 A | ABS202c/150 | ABS203c/150 | ABS204c/150 | | | |
| 175 A | ABS202c/175 | ABS203c/175 | ABS204c/175 | | | |
| 200 A | ABS202c/200 | ABS203c/200 | ABS204c/200 | | | |
| 225 A | ABS202c/225 | ABS203c/225 | ABS204c/225 | | | |
| 250 A | ABS202c/250 | ABS203c/250 | ABS204c/250 | | | |

| ABH type (50kA/460V) | | | | |
|----------------------|-------------|-------------|-------------|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | |
| 100 A | ABH202c/100 | ABH203c/100 | ABH204c/100 | |
| 125 A | ABH202c/125 | ABH203c/125 | ABH204c/125 | |
| 150 A | ABH202c/150 | ABH203c/150 | ABH204c/150 | |
| 175 A | ABH202c/175 | ABH203c/175 | ABH204c/175 | |
| 200 A | ABH202c/200 | ABH203c/200 | ABH204c/200 | |
| 225 A | ABH202c/225 | ABH203c/225 | ABH204c/225 | |
| 250 A | ABH202c/250 | ABH203c/250 | ABH204c/250 | |
| | | | | |

| | ABL type (| 60kA/460V) | |
|-------------------|-------------|---------------------------------------|-------------|
| | | · · · · · · · · · · · · · · · · · · · | |
| Rated current, In | 2-pole | 3-pole | 4-pole |
| 100 A | ABL202c/100 | ABL203c/100 | ABL204c/100 |
| 125 A | ABL202c/125 | ABL203c/125 | ABL204c/125 |
| 150 A | ABL202c/150 | ABL203c/150 | ABL204c/150 |
| 175 A | ABL202c/175 | ABL203c/175 | ABL204c/175 |
| 200 A | ABL202c/200 | ABL203c/200 | ABL204c/200 |
| 225 A | ABL202c/225 | ABL203c/225 | ABL204c/225 |
| 250 A | ABL202c/250 | ABL203c/250 | ABL204c/250 |

Accessories

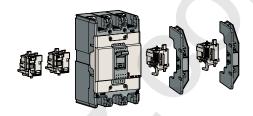

Electrical auxiliaries


| AX | Auxiliary switch | |
|-------|--------------------|--|
| AL | Alarm switch | |
| AX+AL | Combination switch | |
| SHT | Shunt trip | |
| UVT | Undervoltage trip | |



Maximum possibilities

| T-position | One of above auxiliaries | |
|------------|-----------------------------|--|
| R-position | Option of AX or AL or AX+AL | |

Note) For more detail see 7-1 page



| ABH250c | Name |
|-------------|--|
| B33 | Insulation barrier |
| TCL33 | Terminal cover (Long) - Single type, D-handle type, N-handle type |
| TCS33 | Terminal cover (Short) - Single type, D-handle type, N-handle type |
| N-50c | Rotary handle (Direct) |
| DH250 | Rotary handle (Direct) |
| DHK250 | Rotary handle (Direct, key lock) |
| EH250 | Rotary handle (Extended) |
| RTB3 | Rear terminal (Bar) |
| RTR3 | Rear terminal (Round) |
| PBA250C | Plug-in kit |
| Handle lock | |
| МОР-МЗ | Remote operation |

- Note) For more detail see 7-9 ~ 7-26 page
 Single type: This cover is used without auxiliary handle.
 D-handle type: This cover is used with D-handle.
 N-handle type: This cover is used with N-handle.

400AF MCCB

ABN400c, ABS400c, ABH400c, ABL400c

ABS403c



ABL404c

For more information

 Accessories ▶ 7-2 page • Trip curves ▶ 8-4 page ▶ 9-5 page

• Connection and mounting ▶10-3 page

Ratings

| Frame size | | | | | | | | | | | | | | |
|--|------------|------------------|------------------|-------|---------------|------|-------------|--------|--------|--------|------|--------|------|-----|
| | | | | | | | | 400 | AF | | | | | |
| Type and pole | | | N | l-typ | е | 5 | S-typ | е | H | l-typ | е | L | type | е |
| | 2-pole | | A | 3N40 | 2c | AE | 3S40 | 2c | AE | 3H40 | 2c | ABL402 | | 2c |
| | 3-pole | | A | 3N40 | 3с | AE | 3S40 | 3c | AE | 3H40 | 3c | AE | 3L40 | 3с |
| | 4-pole | | A | 3N40 | 4c | AE | 3S40 | 4c | AE | 3H40 | 4c | AE | 3L40 | 4c |
| Rated current, In | | | | | | | 250 | -300- | 350-4 | 00A | | | | |
| Rated operational vol | tage, Ue | | | | | | | AC: | 690V | | | | | |
| | | | | | | | | DC: | 500V | | | | | |
| Rated insulation volta | ige, Ui | | | | | | | AC: 1 | 000V | ' | | | | |
| Rated impulse withsta | and volta | ge, Uimp | | | | | | 8 | ۲V | | | | | |
| Rated short-circuit be | reaking | | 1 | l-typ | е | 5 | S-typ | е | H | l-typ | е | L | type | е |
| capacity, Icu | AC | 690V | | 5kA | \mathcal{I} | | 8kA | | | 10kA | | | 14kA | |
| IEC 60947-2 (lcu) | | 480/500V | | 18kA | | | 35kA | | | 50kA | | | 65kA | |
| | | 415/460V | 37kA | | | 50kA | 1 | | 65kA | | 85kA | | | |
| | | 380V | | 42kA | | | 65kA | | | 70kA | | 1 | 00k/ | 4 |
| | | 220/250V | | 50kA | | | 75kA | | | 85kA | | 1 | 25k/ | 4 |
| | DC | 500V (3P) | | 10kA | | | 20kA | | | 40kA | | | 40kA | |
| | | 250V (2P) | | 10kA | | | 20kA | | | 40kA | | | 40kA | |
| lcs=%×lcu | | | 100% | | | 100% | | 100% | | 75 | | | | |
| Protective function | | | | | | (| Overlo | oad, s | short- | circui | it | | | |
| Type of trip unit | | | Thermal-magnetic | | | | | | | | | | | |
| Magnetic trip range | | | | | | | | 8~1 | 2ln | | | | | |
| Life cycle Note3) | Mechanio | cal | 4,000 operations | | | | | | | | | | | |
| | Electrical | <u> </u> | 1,000 operations | | | | | | | | | | | |
| Connection | Standard | <u> </u> | | | | | Fro | nt co | nnect | tion | | | | |
| | Optional | | | | | | | Plu | g-in | | | | | |
| Mounting | Standard | | | | | | 5 | Screw | fixing | g | | | | |
| Dimensions (mm) | | Pole | 2p | Зр | 4p | 2р | Зр | 4p | 2р | Зр | 4p | 2р | Зр | 4p |
| d | | а | 140 | 140 | 184 | 140 | 140 | 184 | 140 | 140 | 184 | 140 | 140 | 184 |
| a c2 c1 | | b | | 257 | | | 257 | | | 257 | | | 257 | |
| | | c1 Note) | | 109 | | 109 | | | 109 | | | 109 | | |
| | | c2 Note) | | 113 | | | 113 | | | 113 | | | 113 | |
| THE PLANT OF THE PARTY OF THE P | | d | | 145 | | | 145 | | | 145 | | | 145 | |
| | | | - 0 | 6.2 | 7.8 | 5.2 | 6.2 | 7.8 | 5.2 | 6.2 | 7.8 | 5.2 | 6.2 | 7.8 |
| Weight, kg | | Standard | 5.2 | 0.2 | | 0 | U | | V | - | | 0.2 | 0.2 | |
| | | Standard Pole | 5.2 2p | 3p | 4p | 2p | 3р | 4p | 2p | 3р | 4p | 2p | 3p | 4p |

Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
3. Life cycle means not guarantee but limitation
(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABN type (37kA/460V) | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | |
| 250 A | ABN402c/250 | ABN403c/250 | ABN404c/250 | | | |
| 300 A | ABN402c/300 | ABN403c/300 | ABN404c/300 | | | |
| 350 A | ABN402c/350 | ABN403c/350 | ABN404c/350 | | | |
| 400 A | ABN402c/400 | ABN403c/400 | ABN404c/400 | | | |

| ABS type (50kA/460V) | | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | | |
| 250 A | ABS402c/250 | ABS403c/250 | ABS404c/250 | | | | |
| 300 A | ABS402c/300 | ABS403c/300 | ABS404c/300 | | | | |
| 350 A | ABS402c/350 | ABS403c/350 | ABS404c/350 | | | | |
| 400 A | ABS402c/400 | ABS403c/400 | ABS404c/400 | | | | |

| ABH type (65kA/460V) | | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | | |
| 250 A | ABH402c/250 | ABH403c/250 | ABH404c/250 | | | | |
| 300 A | ABH402c/300 | ABH403c/300 | ABH404c/300 | | | | |
| 350 A | ABH402c/350 | ABH403c/350 | ABH404c/350 | | | | |
| 400 A | ABH402c/400 | ABH403c/400 | ABH404c/400 | | | | |

| ABL type (85kA/460V) | | | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | | | |
| 250 A | ABL402c/250 | ABL403c/250 | ABL404c/250 | | | | | |
| 300 A | ABL402c/300 | ABL403c/300 | ABL404c/300 | | | | | |
| 350 A | ABL402c/350 | ABL403c/350 | ABL404c/350 | | | | | |
| 400 A | ABL402c/400 | ABL403c/400 | ABL404c/400 | | | | | |

Accessories





Electrical auxiliaries


| AX | Auxiliary switch |
|-----|-------------------|
| AL | Alarm switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |
| | |



Maximum possibilities

| T-position | Option of 2AX, 2AL and SHT or UVT |
|------------|-----------------------------------|
| R-position | Option of 2AX, 2AL and SHT or UVT |

Note) For more detail see 7-2 page

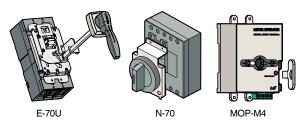

External accessories

| B-43B | Insulation barrier | | | | |
|----------|--|--|--|--|--|
| T1-43A | Terminal cover (Long) - 2, 3pole - Single type, N-handle type | | | | |
| T1-44A | Terminal cover (Long) - 4pole | | | | |
| N-70 | Rotary handle (Direct) | | | | |
| E-70U | Rotary handle (Extended) | | | | |
| MI-43 | Mechanical interlock - 2, 3pole | | | | |
| MI-44 | Mechanical interlock - 4pole | | | | |
| PB-I3-FR | Plug-in kit | | | | |
| MOP-M4 | Remote operation | | | | |
| | | | | | |

Note) For more detail see 7-9 ~ 7-26 page

800AF MCCB ABN800c, ABS800c, ABL800c





Ratings

| Frame size | | | | | | 8 | 800A | F | | | Ť |
|-------------------------------|------------|-----------|-------------------------|------------------|------|-------|---------|-------|---------|--------|------|
| Type and pole | | | | N-type | | | S-type | | | L-type | |
| | 2-pole | | Α | BN802 | 2c | Α | BS802 | 2c | ABL802c | | 2c |
| | 3-pole | | Α | BN803 | lc | Δ | BS803 | BC | A | BL803 | lc . |
| | 4-pole | | Α | BN804 | c | A | BS804 | lc | Α | BL804 | lc |
| Rated current, In | | | | | | 500-6 | 30-700 | -800A | | | |
| Rated operational voltage, Ue | | | | | | A | C: 690 | V | | | |
| | | | | | | É | C: 500 | V | | | |
| Rated insulation volta | age, Ui | | | | | Α | C: 1000 | V | | | |
| Rated impulse withst | tand volta | ge, Uimp | | | | | 8kV | | | | |
| Rated short-circuit b | reaking | | | N-type | | | S-type | | | L-type | |
| capacity, lcu | AC | 690V | | 8kA | | | 10kA | | | 14kA | |
| IEC 60947-2 (lcu) | | 480/500V | | 25kA | | | 45kA | | | 65kA | |
| | | 415/460V | 37kA | | | 65kA | | 85kA | | | |
| | | 380V | 45kA | | 75kA | | 100kA | | | | |
| | | 220/250V | 50kA | | 85kA | | 125kA | | | | |
| DC | | 500V (3P) | 10kA | | 20kA | | 40kA | | | | |
| | | 250V (2P) | | 10kA | | | 20kA | | | 40kA | |
| lcs=%xlcu | | | 100% | | | 100% | | | 75% | | |
| Protective function | | | Overload, short-circuit | | | | | | | | |
| Type of trip unit | | | Thermal-magnetic | | | | | | | | |
| Magnetic trip range | | | 8~12ln | | | | | | | | |
| Life cycle Note3) | Mechani | cal | 2,500 operations | | | | | | | | |
| | Electrica | I | 500 operations | | | | | | | | |
| Connection | Standard | i | | Front connection | | | | | | | |
| | Optional | | | | | | Plug-ir | 1 | | | |
| Mounting | Standard | ł | | | | Sc | rew fix | ing | | | |
| Dimensions (mm) | | Pole | 2p | Зр | 4p | 2p | Зр | 4p | 2p | Зр | 4p |
| d c2 | | а | 210 | 210 | 280 | 210 | 210 | 280 | 210 | 210 | 280 |
| <u>a</u> <u>c1</u> | | b | | 280 | | | 280 | | | 280 | |
| | | c1 Note1) | | 109 | | | 109 | | | 109 | |
| | | c2 Note1) | | 113 | | 113 | | | | 113 | |
| | | d | | 145 | | | 145 | | | 145 | |
| Weight, kg | | Standard | 7.7 | 8.8 | 11.4 | 7.7 | 8.8 | 11.4 | 7.7 | 8.8 | 11.4 |
| Certification | | Pole | 2p | Зр | 4p | 2p | Зр | 4p | 2p | Зр | 4p |
| CE marking | | (€ | | 0 | | | 0 | | | 0 | |

For more information

 Accessories ▶ 7-2 page • Trip curves ▶ 8-4 page ▶ 9-6 page

Connection and mounting ▶10-3 page

- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 3. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABN type (37kA/460V) | | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | | |
| 500 A | ABN802c/500 | ABN803c/500 | ABN804c/500 | | | | |
| 630 A | ABN802c/630 | ABN803c/630 | ABN804c/630 | | | | |
| 700 A | ABN802c/700 | ABN803c/700 | ABN804c/700 | | | | |
| 800 A | ABN802c/800 | ABN803c/800 | ABN804c/800 | | | | |

| ABS type (65kA/460V) | | | | | | | |
|----------------------|-------------|-------------|-------------|--|--|--|--|
| Rated current, In | 2-pole | 3-pole | 4-pole | | | | |
| 500 A | ABS802c/500 | ABS803c/500 | ABS804c/500 | | | | |
| 630 A | ABS802c/630 | ABS803c/630 | ABS804c/630 | | | | |
| 700 A | ABS802c/700 | ABS803c/700 | ABS804c/700 | | | | |
| 800 A | ABS802c/800 | ABS803c/800 | ABS804c/800 | | | | |

| ABL type (85kA/460V) | | | | | | | |
|--|-------------|-------------|-------------|--|--|--|--|
| Rated current, In 2-pole 3-pole 4-pole | | | | | | | |
| 500 A | ABL802c/500 | ABL803c/500 | ABL804c/500 | | | | |
| 630 A | ABL802c/630 | ABL803c/630 | ABL804c/630 | | | | |
| 700 A | ABL802c/700 | ABL803c/700 | ABL804c/700 | | | | |
| 800 A | ABL802c/800 | ABL803c/800 | ABL804c/800 | | | | |
| | | | | | | | |

Accessories



Electrical auxiliaries


| AX | Auxiliary switch |
|-----|-------------------|
| AL | Alarm switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |



Maximum possibilities

| T-position | Option of 2AX, 2AL and SHT or UVT |
|------------|-----------------------------------|
| R-position | Option of 2AX, 2AL and SHT or UVT |

Note) For more detail see 7-2 page

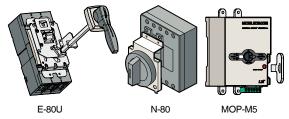

External accessories

| B-33C | Insulation barrier | | |
|----------|--|--|--|
| T1-63A | Terminal cover (Long) - 2, 3pole - Single type, N-handle type | | |
| T1-64A | Terminal cover (Long) - 4pole | | |
| N-80 | Rotary handle (Direct) | | |
| E-80U | Rotary handle (Extended) | | |
| MI-83S | Mechanical interlock - 2, 3pole | | |
| MI-84S | Mechanical interlock - 4pole | | |
| PB-J3-FR | Plug-in kit | | |
| MOP-M5 | Remote operation | | |

Note) For more detail see 7-9 ~ 7-26 page

1000/1200AF MCCB ABS1000b/1200b, ABL1000b/1200b

① Adjustable instantaneous for each phase

For more information

 Trip curves ▶ 8-5 page Drawings ▶ 9-7 page

Ratings

| Frame size | | 1000AF | | 1200AF | | |
|-----------------------|---------------|-------------------------|-------------|----------------|----------|----------|
| | | | | | | |
| Type and pole | 0 | | S-type | L-type | S-type | L-type |
| | 2-pole | | - | - ADI 40001 | - | |
| | 3-pole | | ABS1003b | ABL1003b | ABS1203b | ABL1203b |
| | 4-pole | | ABS1004b | ABL1004b | ABS1204b | ABL1204b |
| Rated current, In | | | 1000A 1200A | | | |
| Rated operational vo | | | AC: 600V | | | |
| Rated insulation volt | | | | 69 | | |
| Rated impulse withs | tand volta | ige, Uimp | | 61 | (V | |
| Rated short-circuit b | reaking | | S-type | L-type | S-type | L-type |
| capacity, Icu | AC | 690V | 45kA | 65kA | 45kA | 65kA |
| IEC 60947-2 (lcu) | | 480/500V | 50kA | 75kA | 50kA | 75kA |
| | | 460V/415V | 65kA | 85kA | 65kA | 85kA |
| | | 380V | 65kA | 85kA | 65kA | 85kA |
| | | 220/250V | 100kA | 125kA | 100kA | 125kA |
| lcs=%×lcu | | | 50% | 50% | 50% | 50% |
| Protective function | | Overload, short-circuit | | | | |
| Type of trip unit | | | | Thermal- | magnetic | |
| Magnetic trip range | | | 3~6×ln① | | | |
| Life cycle Note3) | Mechan | ical | | 2,500 op | erations | |
| | Electrica | al | | 500 ope | erations | |
| Connection | Standar | d | | Front co | nnection | |
| Mounting | Standar | d | | Screw | fixing | |
| Dimensions (mm) | | Pole | 3р | 4p | 3р | 4p |
| . a . | d c2 c1 | a | 220 | 290 | 220 | 290 |
| | | b | 400 | 400 | 400 | 400 |
| | | С | 105 | 105 | 105 | 105 |
| | | d | 159 | 159 | 159 | 159 |
| Weight, kg | | Standard | 19.6 | 25.7 | 19.6 | 25.7 |
| Certification | | Pole | 3p | 4p | 3p | 4p |
| CE marking | | (€ | ABS1003b | ABS1004b | ABS1203b | ABS1204b |
| | | | 0 | × | 0 | × |
| | | | ABL1003b | ABL1004b | ABL1203b | ABL1204b |
| | | | × | × | × | × |

Note) 1. Please specify the frequency when ordering.
2. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
3. Life cycle means not guarantee but limitation
(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABS type (65kA/460V) | | | | | |
|------------------------------------|---------------|---------------|--|--|--|
| Rated current, In 3-pole 4-pole | | | | | |
| 1000 A | ABS1003b/1000 | ABS1004b/1000 | | | |
| 1200 A ABS1203b/1200 ABS1204b/1200 | | | | | |

| ABL type (85kA/460V) | | | | | | |
|-----------------------------------|---------------------------------|---------------|--|--|--|--|
| Rated current, In | Rated current, In 3-pole 4-pole | | | | | |
| 1000 A | ABL1003b/1000 | ABL1004b/1000 | | | | |
| 1200 A ABL1203b/1200 ABL1204b/120 | | | | | | |

Option of below items for T-position

| AX1 | Auxiliary switch (1c) | | |
|--------|------------------------------------|--|--|
| AX2 | Auxiliary switch (2c) | | |
| AL1 | Alarm switch (1c) | | |
| AL2 | Alarm switch (2c) | | |
| AX1+AL | Auxiliary (1c) + Alarm (1c) switch | | |
| AX2+AL | Auxiliary (2c) + Alarm (1c) switch | | |



Option of below items for R-position

| SHT | Shunt trip |
|-----|-------------------|
| UVT | Undervoltage trip |



MOP-M6

External accessories

| MOP-M6 | Remote operation |
|--------|------------------|

Note) For more detail see7-25 page

Contact operation for auxiliary and alarm switches

| МССВ | On | Off | Trip |
|------|-----------|----------------|--------------------------------|
| АХ | AXc1 | (21) AXc1 -Q | O—AXa1 (20) AXb1 (30) |
| AL | ALc1 (13) | ALa1 (11) (12) | ALc1 (11) (12) |

Contact rating for auxiliary and alarm switches

| AC | | | DC | | |
|---------|----------------|----------------|---------|----------------|----------------|
| Voltage | Current (A) | | Voltage | Current (A) | |
| (V) | Resistive load | Inductive load | (V) | Resistive load | Inductive load |
| 125 | 20 | 20 | 30 | 6 | 5 |
| 250 | 20 | 20 | 125 | 0.4 | 0.05 |
| 500 | 10 | 5 | 250 | 0.2 | 0.03 |

Rating for shunt trip (SHT)

| Con | trol voltage | Time rating | Operational voltage |
|-----|--|-------------|----------------------------|
| AC | 100~110V 125V 200~220V 380~440V 480~550V | Continuous | 85~110% of control voltage |
| DC | 24V 48V 100~110V 125V 200~220V | | 75~125% of control voltage |


Rating for undervoltage release (UVT)


| Control voltage | | Time rating | Operational voltage | Trip voltage |
|-----------------|--|-------------|----------------------------|---------------------------|
| AC | 100~110V 125V 200~220V 380~440V | Continuous | 85~110% of control voltage | 20~70% of control voltage |

1200AF Electronic MCCB

ABS1203bE







For more information • Trip curves • Drawings • 9-8 page

Ratings

| Frame si | ze | | | 1200AF | | |
|------------------|-----------------------|------------------|-------------|--|--|--|
| Type and | d pole | | | S-type S-type | | |
| 2-pole 3-pole | | | - | | | |
| | | | ABS1203bE | | | |
| | | 4-pole | | - | | |
| Rated cu | ırrent, İn | | | 1200A | | |
| Rated op | erational vo | ltage, Ue | | AC: 600V | | |
| Rated in: | sulation volta | age, Ui | | AC: 690V | | |
| Rated im | pulse withst | and volta | ge, Uimp | 6kV | | |
| Туре | Long time | | Current, IR | (0.5-0.6-0.7-0.8-0.9-1.0) × In, adjustable① | | |
| | Pick-up | | Time | 5sec ± 20% at 6 × Ir, fixed | | |
| | Short time | | Current, Im | (2-3-4-5-6-8-10) × ln, adjustable② | | |
| | Pick-up | | Time | 0.1-0.2-0.3 sec, adjustable③ | | |
| | Instantane | eous Current, It | | 11×In, fixed | | |
| | Pick-up | Time | | within 0.03 sec, fixed | | |
| | ⑤ LED | | Pre-alarm | Between 70 to 110% of set current Ir: LED flickering | | |
| | | | | Over 110% of set current Ir: stays on | | |
| | 4 Rated fr | requency | | 50-60Hz selectable by the switch of the trip unit | | |
| Rated sh | ort-circuit b | reaking | | S-type | | |
| capacity | , Icu | | AC 690V | 45kA | | |
| | | | 480/500V | 50kA | | |
| | | | 415/460V | 65kA | | |
| | | | 380V | 65kA | | |
| | | | 220/250V | 100kA | | |
| lcs=%×lc | cu | | | 50% | | |
| Protectiv | e function | | | Overload, short-circuit | | |
| Type of to | rip unit | | | Electronic type | | |
| Life cycle | Note1) | Mechani | cal | 2,500 operations | | |
| | | Electrical | | 500 operations | | |
| Connecti | on | Standard | l | Front connection | | |
| Mounting | Nounting Standard | | ı | Screw fixing | | |
| Dimensi | ons (mm) _d | | Pole | 3p | | |
| a | | | а | 220 | | |
| | | | b | 400 | | |
| | | | С | 105 | | |
| | | | d | 159 | | |
| Weight, k | g | | Standard | 21 | | |
| | | | | | | |

Note) 1. Life cycle means not guarantee but limitation (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

| ABS type (65kA/460V) | | | | |
|--------------------------|--|--|--|--|
| Rated current, In 3-pole | | | | |
| 1200A ABS1203bE | | | | |

Option of below items for T-position

| AX1 | Auxiliary switch (1c) | | | |
|--------|------------------------------------|--|--|--|
| AX2 | Auxiliary switch (2c) | | | |
| AL1 | Alarm switch (1c) | | | |
| AL2 | Alarm switch (2c) | | | |
| AX1+AL | Auxiliary (1c) + Alarm (1c) switch | | | |
| AX2+AL | Auxiliary (2c) + Alarm (1c) switch | | | |



Option of below items for R-position

| SHT | Shunt trip | |
|-----|-------------------|--|
| UVT | Undervoltage trip | |

Contact operation for auxiliary and alarm switches

| МССВ | On | Off | Trip |
|------|---------------------------|----------------|------------------------|
| АХ | AXc1 (20) (21) (AXb1 (30) | (21) AXc1 Q | (20) (AXb1) (30) |
| AL | ALc1 (13) | ALa1 (11) (12) | ALc1 |

Contact rating for auxiliary and alarm switches

| AC | | | DC | | |
|---------|----------------|----------------|---------|----------------|----------------|
| Voltage | Current (A) | | Voltage | Current (A) | |
| (V) | Resistive load | Inductive load | (V) | Resistive load | Inductive load |
| 125 | 20 | 20 | 30 | 6 | 5 |
| 250 | 20 | 20 | 125 | 0.4 | 0.05 |
| 500 | 10 | 5 | 250 | 0.2 | 0.03 |

Rating for shunt trip (SHT)

| Con | trol voltage | Time rating | Operational voltage |
|-----|--|-------------|----------------------------|
| AC | 100~110V 125V 200~220V 380~440V 480~550V | Continuous | 85~110% of control voltage |
| DC | 24V 48V 100~110V 125V 200~220V | | 75~125% of control voltage |

Rating for undervoltage release (UVT)

| Control voltage | | Time rating | Operational voltage | trip voltage |
|-----------------|--|-------------|----------------------------|---------------------------|
| AC | 100~110V 125V 200~220V 380~440V | Continuous | 85~110% of control voltage | 20~70% of control voltage |

30AF ELCB EBS30c

EBS33c

Ratings


| Frame size | ! | | 30AF | | | |
|------------------|------------------|---------------------|-------------|--|-----------------------|--|
| Type and pole | | | | S-t | уре | |
| | | 2-pole (2-sensor) | | EBS | 332c | |
| | | 3-pole (3-sensor) | | EBS | 333c | |
| | | 4-pole (3-sensor) | EBS34c | | | |
| Rated current, | In | | | (5-10) Note3 | -15-20-30A | |
| Rated impulse v | withstand voltaç | ge, Uimp | | 61 | ¢V | |
| | Rated residua | al current, I∆n | 30, 100, 10 | 30, 100, 100/200/500, 100/300/500mA (Adjustable) | | |
| Instantaneous | Residual curre | ent off-time at I△n | | ≤0.1 | sec | |
| type | Rated operati | onal voltage, Ue | | AC: 22 | 0/460V | |
| Time delay | Rated residua | al current | 0.1/0 | .2/0.5/1A, 0.1/0 |).4/1/2A (Adjustable) | |
| type | Intentional tim | ne delay | 0/0. | 2/0.5/1s, 0.5/1 | 1.5/2s (Adjustable) | |
| Wiring system | | 2-pole (2-sensor) | | 1Ø | 2W | |
| 7 | | 3-pole (3-sensor) | | 1Ø2W, 1Ø | 3W, 3Ø3W | |
| | | 4-pole (3-sensor) | | 1Ø2W, 1Ø3W, | 3Ø3W, 3Ø4W | |
| Rated short-cir | rcuit breaking | | | S-ty | уре | |
| capacity, Icu A | | AC 460V | 14 (10)kA | | | |
| | | 415V | 14 (10)kA | | | |
| | | 220/250V | 30 (25)kA | | | |
| lcs=%×lcu | | | 100% | | | |
| Protective fun | ction | | Over | load, short-circ | uit and ground fault | |
| Type of trip uni | t | | | Thermal- | magnetic | |
| Magnetic trip ra | ange | | | 40 | 0A | |
| Life cycle Note6 |) | Mechanical | | 25,000 o | perations | |
| | | Electrical | | 10,000 o | perations | |
| Connection | | Standard | | Front co | nnection | |
| | | Optional | | Rear co | nnection | |
| Mounting | | Standard | | Screw | fixing | |
| Dimensions (r | nm) | Pole | 2p | 3р | 4p | |
| | d | а | | 75 | 100 | |
| <u>a</u> | c2 c1 | b | 1 | 30 | 130 | |
| | | c1 Note1) | (| 60 | 60 | |
| | | c2 Note1) | | 64 | 64 | |
| | | d | 82 | | 82 | |
| Weight, kg | | Standard | 0.5 | 0.7 | 0.9 | |
| Certification | | Pole | 3p | | 4p | |
| CE mark | king | (€ | | 0 | 0 | |

For more information

- Accessories ▶ 7-1 page • Trip curves ▶ 8-1 page Drawings ▶ 9-9 page • Connection and mounting ▶10-2 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.
 3. The short-circuit breaking capacities in () are applied to the rated current in (5, 10A)
 4. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 5. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 6. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

Instantaneous type




| | Code | | Rated current | | |
|---------------------|------|--|---------------|--|--|
| | 5 | | 5A | | |
| | 10 | | 10A | | |
| | 15 | | 15A | | |
| | 20 | | 20A | | |
| | 25 | | 25A | | |
| | 30 | | 30A | | |
| A Detector district | | | | | |

| / [| 30 | | |
|----------------|-----|---------|--------------|
| Code | | Rated r | |
| 30 | | 30mA | |
| 100 | | 100 | mA |
| 100/200/ | 500 | 100/200 | /500mA |
| 100/300/ | 500 | 100/300 | /500mA |
| . 2 2, 0 0 0 7 | , | | , = = 311.11 |

Note) EBS32c/5/30: EBS32c, Rated current 5A, Rated residual current 30mA

Time delay type




| | \top |
|------|---------------|
| Code | Rated current |
| 5 | 5A |
| 10 | 10A |
| 15 | 15A |
| 20 | 20A |
| 25 | 25A |
| 30 | 30A |
| | |


| ated rrent | Code | Rated residual current | Intentional time delay |
|---------------|------|------------------------|------------------------|
| 5A | 1A1s | 1A | 1s |
| 0A | 2A2s | 2A | 2s |
| | | | |

1A1s

Note) EBS32c/5/30: EBS32c, Rated current 5A, Time delay type 1A1s

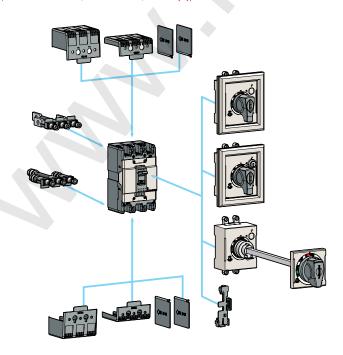

Accessories



Electrical auxiliaries


| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |



Maximum possibilities

| T-position Not available | | Not available |
|--------------------------|------------|-----------------------------|
| | R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| EBS30c | Name | |
|-------------|--|--|
| IB13 | Insulation barrier | |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type | |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type | |
| N-30c | Rotary handle (Direct) | |
| DH100 | Rotary handle (Direct) | |
| DHK100 | Rotary handle (Direct, key lock) | |
| EH100 | Rotary handle (Extended) | |
| RTR1 | Rear terminal (Bar) | |
| Handle lock | | |

- Note) For more detail see 7-9 ~ 7-23 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

50AF ELCB EBN50c, EBS50c, EBH50c

Ratings





EBS53c

| Frame size | | | | 50 | AF | | | |
|---------------------------------------|----------------------------------|---|-------------|----------------|------------------|-------------|------------|--|
| Type and pole | | N-type S-type H-type | | | | | | |
| Type and pole | 2-pole (2-sensor) | | уре 152c | 0-1 | | 11-0 | | |
| | 3-pole (3-sensor) | | 153c | FBS | 553c | FBH | 153c | |
| | 4-pole (3-sensor) | | | | 54c | | 154c | |
| Rated current, In | 4-pole (3-sel isol) | | | |)-40-50A | LDI | 1040 | |
| Rated impulse withstand | voltage I limp | | | 13-20-30 6l | | | | |
| · · · · · · · · · · · · · · · · · · · | esidual current, I \triangle n | 30.1 | 00 100/20 | | | mΔ (Δdius | table) | |
| Instantaneous | l current off-time at I△n | 30, 100, 100/200/500, 100/300/500mA (Adjustable) ≤0.1 sec | | | | | | |
| type | perational voltage, Ue | ≤0.1 sec AC: 220/460V | | | | | | |
| 5 | esidual current | | 1/0 2/0 | 5/1A, 0.1/ | | 'Adiustable | 7) | |
| | nal time delay | | | 5/1s, 0.5/1 | | | <i>'</i>) | |
| Wiring system | 2-pole (2-sensor) | | 0/0.2/0.0 | | 71.5/23 (A 2W | ajustabioj | | |
| willing by sterin | 3-pole (3-sensor) | | 1 | Ø2W, 1Ø | | N | | |
| | 4-pole (3-sensor) | | | V, 1Ø3W, | | | | |
| Rated short-circuit brea | | | | | | уре | | |
| capacity, lcu | AC 460V | 14kA | | 18kA | | 50kA | | |
| supusity, iou | 415V | 14kA | | 18kA | | 50kA | | |
| | 220/250V | 30 | kA | 35 | kA | 100 |)kA | |
| lcs=%×lcu | | 100% 100% | | 0% | 100% | | | |
| Protective function | | Overload, short-circuit and ground fault | | | | | | |
| Type of trip unit | | Thermal-magnetic | | | | | | |
| Magnetic trip range | | 12×In (30A and under: 400A) | | | | | | |
| Life cycle Note5) | Mechanical | 25,000 operations | | | | | | |
| | Electrical | 10,000 operations | | | | | | |
| Connection | Standard | Front connection | | | | | | |
| | Optional | Rear connection | | | | | | |
| Mounting | Standard | Screw fixing | | | | | | |
| Dimensions (mm) | Pole | 2p | Зр | Зр | 4p | Зр | 4p | |
| d | a | 75 | 75 | 75 | 100 | 90 | 120 | |
| a c2 c1 | b | 13 | 30 | 13 | 30 | 1 | 55 | |
| | c1 Note1) | 6 | 0 | 60 | | 6 | 60 | |
| | c2 Note1) | 6 | 4 | 6 | 4 | 6 | 4 | |
| | d | 82 | | 82 | | 82 | | |
| Weight, kg | Standard | 0.5 | 0.7 | 0.7 | 0.9 | 1 | 1.2 | |
| Certification | Pole | 2p | Зр | Зр | 4p | Зр | 4p | |
| CE marking | | |) | | | (|) | |

For more information

- Accessories ▶ 7-1 page • Trip curves ▶ 8-1 ~ 8-2 page Drawings ▶ 9-9 ~ 9-10 page
- Connection and mounting ▶10-2 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.
 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 5. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

Instantaneous type

| E | BN53c / |
|--------|---------------------|
| Code | Frame size/ Pole |
| EBN52c | EBN 50AF 2P |
| EBN53c | EBN 50AF 3P |
| EBS53c | EBS 50AF 3P |
| EBS54c | EBS 50AF 4P |
| EBH53c | EBH 50AF 3P |
| EBH54c | EBH 50AF 4P |

| Code | Rated current | |
|------|---------------|--|
| 15 | 15A | |
| 20 | 20A | |
| 30 | 30A | |
| 40 | 40A | |
| 50 | 50A | |
| | | |

| / | 30 | |
|-------------|------------------------|--|
| | | |
| Code | Rated residual current | |
| 30 | 30mA | |
| 100 | 100mA | |
| 100/200/500 | 100/200/500mA | |
| 100/300/500 | 100/300/500mA | |
| | | |

Note) EBS53c/20/30: EBS53c, Rated current 20A, Rated residual current 30mA


Time delay type

| | EBN53C | | / |
|-------|--------|-------------|-------|
| | | | |
| Code | • | Frame Po | |
| EBN52 | 2c | EBN 50 | AF 2P |
| EBN53 | 3c | EBN 50 | AF 3P |
| EBS53 | 3c | EBS 50 | AF 3P |
| EBS54 | 1c | EBS 50 | AF 4P |
| EBH53 | 3c | EBH 50 | AF 3P |
| EBH54 | 4c | EBH 50 | AF 4P |
| | | | |


| Code | Rated current |
|------|---------------|
| 15 | 15A |
| 20 | 20A |
| 30 | 30A |
| 40 | 40A |
| 50 | 50A |
| | |

| 20 | | / | | 713 | | |
|------|---------------|------|---------------------|-----|------------------------|--|
| | | | | | | |
| Code | Rated current | Code | Rated res currer | | Intentional time delay | |
| 15 | 15A | 1A1s | 1A | | 1s | |
| 20 | 20A | 2A2s | 2A | | 2s | |
| 30 | 30A | | | | | |
| 40 | 40A | | | | | |
| 50 | 50A | | | | | |

Note) EBS53c/20/30: EBS53c, Rated current 20A, Time delay type 1A1s

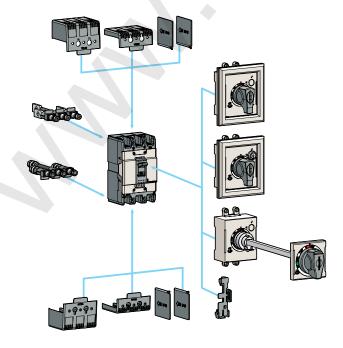

Accessories



Electrical auxiliaries

| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |



Maximum possibilities

| T-position | Not available |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| EBN50c EBS50c | ЕВН50с | Name |
|------------------|---------|--|
| IB13 | IB23 | Insulation barrier |
| TCL13 | TCL23 | Terminal cover (Long) - Single type, D-handle type, N-handle type |
| TCS13 | TCS23 | Terminal cover (Short) - Single type, D-handle type, N-handle type |
| N-30c | N-40c | Rotary handle (Direct) |
| DH100 | DH125 | Rotary handle (Direct) |
| DHK100 | DHK125 | Rotary handle (Direct, key lock) |
| EH100 | EH125 | Rotary handle (Extended) |
| - | RTB2 | Rear terminal (Bar) |
| RTR1 | RTR2 | Rear terminal (Round) |
| Hand | le lock | |

- Note) For more detail see 7-9 ~ 7-23 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

60AF ELCB EBN60c, EBS60c

Ratings



EBN63c



EBS63c

| Frame size | | | 60 | AF | |
|------------------------------|-----------------------------|----------------------|--|------------------|---------------------------------------|
| Type and pole | | | N-type | S-t | ype |
| | | 2-pole (2-sensor) | - | - | |
| | | 3-pole (3-sensor) | EBN63c | EBS | 363c |
| | | 4-pole (3-sensor) | - | EBS | 64c |
| Rated current, I | n | | 60 | Α | |
| Rated impulse w | ithstand volta | ge, Uimp | 6k | :V | |
| | Rated residual current, I△n | | 30, 100, 100/200/500, 100/300/500mA (Adjustable) | | |
| Instantaneous | Residual cur | rent off-time at I△n | ≤0.1 sec | | |
| type | Rated opera | tional voltage, Ue | AC: 220 | 0/460V | |
| Time delay | Rated residu | al current | 0.1/0.2/0.5/1A, 0.1/0 |).4/1/2A (Adju: | stable) |
| type | Intentional tir | me delay | 0/0.2/0.5/1s, 0.5/1/ | 1.5/2s (Adjust | able) |
| Wiring system | | 2-pole (2-sensor) | _ | | · · · · · · · · · · · · · · · · · · · |
| o , | | 3-pole (3-sensor) | 1Ø2W, 1Ø3 | 3W, 3Ø3W | |
| | | 4-pole (3-sensor) | 1Ø2W, 1Ø3W, 3Ø3W, 3Ø4W | | V |
| Rated short-cir | cuit breaking | | N-type | S-type | |
| capacity, Icu | | AC 460V | 14kA | 18 | kA |
| | | 415V | 14kA | 18 | skA |
| | | 220/250V | 30kA | 35 | kA |
| lcs=%×lcu | | | 100% | 10 | 0% |
| Protective fund | ction | | Overload, short-circ | uit and groun | d fault |
| Type of trip unit | | | Thermal- | magnetic | |
| Magnetic trip ra | nge | | 12×ln | | |
| Life cycle Note5) | | Mechanical | 25,000 operations | | |
| | | Electrical | 10,000 op | perations | |
| Connection | | Standard | Front cor | Front connection | |
| | | Optional | Rear cor | nnection | |
| Mounting | | Standard | Screw fixing | | |
| Dimensions (m | nm) | Pole | 3р | 3р | 4p |
| · | d | a | 75 | 75 | 100 |
| <u>a</u> | c2 c1 | b | 130 | 130 | 130 |
| | | c1 Note1) | 60 | 60 | 60 |
| | | c2 Note1) | 64 | 64 | 64 |
| <u>11 - 20 - 23 - 17 - 1</u> | | d | 82 | 82 | 82 |
| Weight, kg | | Standard | 0.7 | 0.7 | 0.9 |
| Certification | | Pole | 3p | 3p | 4p |
| | ng | (€ | 0 | | |

For more information

- ▶ 7-1 page Accessories • Trip curves ▶ 8-1 page • Drawings ▶ 9-9 page • Connection and mounting ▶10-2 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 - 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.

 5. Life cycle means not guarantee but limitation

 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)


Breaker types

Instantaneous type EBN63c 60 30 Rated residual Rated Frame size/ Code Code Code Pole current current EBN63c EBN 60AF 3P 30 30mA 60 60A EBS63c EBS 60AF 3P 100 100mA EBS64c EBS 60AF 4P 100/200/500 100/200/500mA 100/300/500 100/300/500mA


Note) EBS63c/60/30: EBS63c, Rated current 60A, Rated residual current 30mA

Time delay type EBN63c 60 1A1s Intentional Frame size/ Pole Rated Rated residual Code Code Code current current time delay EBN63c EBN 60AF 3P 1A1s 1A 1s 60 60A 2s EBS63c EBS 60AF 3P 2A2s 2A EBS64c EBS 60AF 4P

Note) EBS63c/60/30: EBS63c, Rated current 60A, Time delay type 1A1s

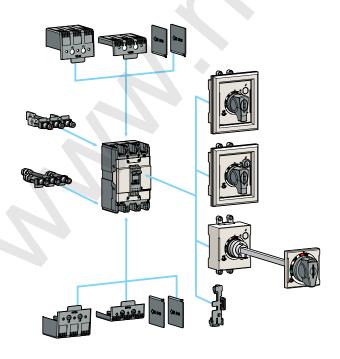

Accessories



Electrical auxiliaries

| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |



Maximum possibilities

| T-position | | Not available | |
|------------|------------|-----------------------------|--|
| | R-position | Option of AX or AL or AX+AL | |

Note) For more detail see 7-1 page



External accessories

| EBS60c EBN60c | Name | |
|------------------|--|--|
| IB13 | Insulation barrier | |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type | |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type | |
| N-30c | Rotary handle (Direct) | |
| DH100 | Rotary handle (Direct) | |
| DHK100 | Rotary handle (Direct, key lock) | |
| EH100 | Rotary handle (Extended) | |
| RTB1 | Rear terminal (Bar) | |
| RTR1 | Rear terminal (Round) | |
| Handle lock | | |

Note) For more detail see 7-9 ~ 7-23 page

- Single type: This cover is used without auxiliary handle.
 D-handle type: This cover is used with D-handle.
 N-handle type: This cover is used with N-handle.

100AF ELCB EBN100c

Ratings

| _ | | | | | | |
|--------------------|------------------|---------------------|--|----------------------|-------------|--|
| Frame size | | | | 100AF | | |
| Type and pole | | | | N-type | | |
| | | 2-pole (2-sensor) | | EBN102c | | |
| | | 3-pole (3-sensor) | | | | |
| | | 4-pole (3-sensor) | | EBN104c | | |
| Rated current, | ln | | | 60-75-100A | | |
| Rated impulse v | vithstand voltag | je, Uimp | | 6kV | | |
| Instantonesus | Rated residua | al current, I∆n | 30, 100, 100/200/500, 100/300/500mA (Adjustable) | | | |
| Instantaneous type | Residual curr | ent off-time at I△n | ≤0.1 sec | | | |
| -71 | Rated operati | onal voltage, Ue | | AC: 220/460V | | |
| Time delay | Rated residua | al current | 0.1/0.2/0.5 | /1A, 0.1/0.4/1/2A (/ | Adjustable) | |
| type | Intentional tim | ne delay | 0/0.2/0.5/ | /1s, 0.5/1/1.5/2s (A | djustable) | |
| Wiring system | | 2-pole (2-sensor) | | 1Ø2W | | |
| | | 3-pole (3-sensor) | 19 | 02W, 103W, 303\ | N | |
| | | 4-pole (3-sensor) | 1Ø2V | V, 1Ø3W, 3Ø3W, 3 | Ø4W | |
| Rated short-cir | cuit breaking | | | N-type | | |
| capacity, lcu | | AC 460V | 18kA | | | |
| | | 415V | 18kA | | | |
| | | 220/250V | 35kA | | | |
| lcs=%xlcu | | | | 100% | | |
| Protective fun | ction | | Overload, | short-circuit and gr | ound fault | |
| Type of trip uni | t | | | Thermal-magnetic | | |
| Magnetic trip ra | ange | | 12×In | | | |
| Life cycle Note5) | | Mechanical | 25,000 operations | | | |
| | | Electrical | | 10,000 operations | itions | |
| Connection | | Standard | | Front connection | | |
| | | Optional | | Rear connection | | |
| Mounting | | Standard | | Screw fixing | | |
| Dimensions (n | nm) | Pole | 2p | 3p | 4p | |
| | d | а | 75 | 75 | 100 | |
| a | c2 c1 | b | 130 | 130 | 130 | |
| | 4 | c1 Note1) | 60 | 60 | 60 | |
| | | c2 Note1) | 64 | 64 | 64 | |
| | | d | 82 | 82 | 82 | |
| Weight, kg | Weight, kg | | 0.5 | 0.7 | 0.9 | |
| Certification | Certification | | 2p | 3p | 4p | |
| CE mark | CE marking | | 0 | 0 | 0 | |
| | | (€ | | 1 | | |

For more information

- Accessories ▶ 7-1 page Trip curves ▶ 8-1 page • Drawings ▶ 9-9 page • Connection and mounting ▶10-2 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.
 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 5. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)


Breaker types

Instantaneous type EBN103c 100 30 Rated residual Rated Frame size/ Code Code Code Pole current current EBN102c EBN 100AF 2P 60A 30 30mA EBN103c EBN 100AF 3P 75 75A 100 100mA EBN104c EBN 100AF 4P 100 100A 100/200/500 100/200/500mA 100/300/500 100/300/500mA


Note) EBN103c/100/30: EBN103c, Rated current 100A, Rated residual current 30mA

Time delay type EBN103c 100 1A1s Intentional time delay Rated residual Frame size/ Pole Rated Code Code Code current current EBN102c 60 60A 1A1s EBN 100AF 2P 1A 1s EBN103c **EBN 100AF 3P** 75 75A 2A2s 2A 2s EBN104c EBN 100AF 4P 100 100A

Note) EBN103c/100/30: EBN103c, Rated current 100A, Time delay type 1A1s

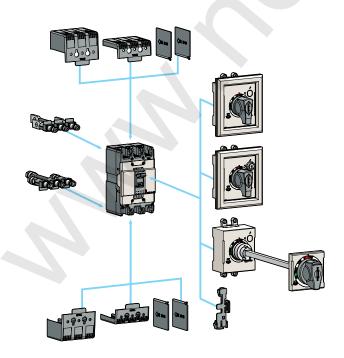

Accessories



Electrical auxiliaries


| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |



Maximum possibilities

| T-position | Not available |
|------------|-----------------------------|
| R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



External accessories

| EBN100c | Name |
|-------------|--|
| IB13 | Insulation barrier |
| TCL13 | Terminal cover (Long) - Single type, D-handle type, N-handle type |
| TCS13 | Terminal cover (Short) - Single type, D-handle type, N-handle type |
| N-30c | Rotary handle (Direct) |
| DH100 | Rotary handle (Direct) |
| DHK100 | Rotary handle (Direct, key lock) |
| EH100 | Rotary handle (Extended) |
| RTB1 | Rear terminal (Bar) |
| RTR1 | Rear terminal (Round) |
| Handle lock | |

Note) For more detail see 7-9~ 7-23 pageNote) For more detail see 82 page
• Single type: This cover is used without auxiliary handle.
• D-handle type: This cover is used with D-handle.
• N-handle type: This cover is used with N-handle.

125AF ELCB EBS125c, EBH125c

Ratings



EBS103c



EBH103c

| Frame size | ı | | | 125 | AF | | | |
|------------------------------|-----------------|---------------------|-----------------------------|------------------|-----------------|--------------|--|--|
| Type and pole | | | S-type H-type | | | | | |
| Type and pole | | 2-pole (2-sensor) | | | - | | | |
| | | 3-pole (3-sensor) | FBS | 103c | FBH | 103c | | |
| | | 4-pole (3-sensor) | | EBS104c | | 104c | | |
| Rated current, | In | 4-pole (0-serisor) | | -20-30-40-50- | | | | |
| Rated impulse v | | ne. Uimp | | 6k | | | | |
| Tialoa III.pailoo | ` | al current, I 🛆 n | 30, 100, 10 | 0/200/500, 100 | | (Adjustable) | | |
| Instantaneous | | ent off-time at l△n | | | l sec | , , | | |
| type | Rated operati | onal voltage, Ue | | AC: 22 | 0/460V | | | |
| Time delay | Rated residua | | 0.1/0. | 2/0.5/1A, 0.1/0 |).4/1/2A (Adjus | stable) | | |
| type | Intentional tim | ne delay | 0/0.2 | 2/0.5/1s, 0.5/1/ | /1.5/2s (Adjust | able) | | |
| Wiring system | | 2-pole (2-sensor) | | - | | | | |
| | | 3-pole (3-sensor) | | 1Ø2W, 1Ø | 3W, 3Ø3W | | | |
| | | 4-pole (3-sensor) | 1 | Ø2W, 1Ø3W, | 3Ø3W, 3Ø4V | V | | |
| Rated short-circuit breaking | | | N-ty | уре | S-type | | | |
| capacity, lcu | | AC 460V | 37kA | | 50kA | | | |
| | | 415V | 37kA | | 50kA | | | |
| | | 220/250V | 85kA | | 100kA | | | |
| lcs=%×lcu | | | 100 | 0% | 10 | 100% | | |
| Protective fun | ction | | Overl | oad, short-circ | uit and groun | d fault | | |
| Type of trip uni | t | | Thermal-magnetic | | | | | |
| Magnetic trip ra | ange | | 12×In (30A and under: 400A) | | | | | |
| Life cycle Note5 |) | Mechanical | 25,000 operations | | | | | |
| | | Electrical | 10,000 operations | | | | | |
| Connection | | Standard | Front connection | | | | | |
| | | Optional | Rear connection | | | | | |
| Mounting | | Standard | | Screw | fixing | | | |
| Dimensions (r | mm) | Pole | 3р | 4p | 3р | 4p | | |
| | d | a | 90 | 120 | 90 | 120 | | |
| a | c1 | b | 155 | 155 | 155 | 155 | | |
| | | c1 Note1) | 60 | 60 | 60 | 60 | | |
| | MET. | c2 Note1) | 64 | 64 | 64 | 64 | | |
| | | d | 82 | 82 | 82 | 82 | | |
| Weight, kg | | Standard | 1 | 1.2 | 1 | 1.2 | | |
| Certification | | Pole | 3р | 4p | 3р | 4p | | |
| CE mark | ing | (€ | 0 | 0 | 0 | 0 | | |

For more information

- Accessories ▶ 7-1 page • Trip curves ▶ 8-2 page Drawings ▶ 9-10 page • Connection and mounting ▶10-2 page

- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.
 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 5. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

Instantaneous type

Frame size/ Code Pole EBS103c EBS 125AF 3P EBS104c EBS 125AF 4P EBH103c EBH 125AF 3P EBH104c EBH 125AF 4P

EBS103c

| | 100 | | | | | | |
|------|---------------|--|--|--|--|--|--|
| | | | | | | | |
| Code | Rated current | | | | | | |
| 15 | 15A | | | | | | |
| 20 | 20A | | | | | | |
| 30 | 30A | | | | | | |
| 40 | 40A | | | | | | |
| 50 | 50A | | | | | | |
| 60 | 60A | | | | | | |
| 75 | 75A | | | | | | |
| 100 | 100A | | | | | | |
| 125 | 125A | | | | | | |
| | | | | | | | |

100

| / | 3 | 30 | |
|----------|-----|---------|------------|
| Code | | Rated i | residual |
| 30 | | | rent mA |
| 100 | | |)mA |
| 100/200/ | 500 | 100/200 |)/500mA |
| 100/300/ | 500 | 100/300 |)/500mA |
| | | | |

1A1s

Rated residual

current

1A

2A

Code

1A1s

2A2s

Intentional time delay

1s

2s

Note) EBS103c/100/30: EBS103c, Rated current 100A, Rated residual current 30mA


Time delay type

EBS103c Frame size Code EBS103c **EBS 125A**l EBS104c EBS 125Al EBH103c **EBH 125A** EBH104c EBH 125A

| ize/ | Code | Rated current |
|-------|------|-----------------|
| F 3P | 15 | 15A |
| F 4P | 20 | 20A |
| F 3P | 30 | 30A |
| F 4P | 40 | 40A |
| | 50 | 50A |
| | 60 | 60A |
| | 75 | 75A |
| | 100 | 100A |
| | 125 | 125A |
| D-1-1 | | Time e el el es |

Note) EBS103c/100/30: EBS103c, Rated current 100A, Time delay type 1A1s

Accessories



Electrical auxiliaries

| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |



Maximum possibilities

| T-position Not available | | Not available |
|--------------------------|------------|-----------------------------|
| | R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| EBS125c EBH125c | Name | | | | |
|--------------------|--|--|--|--|--|
| IB23 | Insulation barrier | | | | |
| TCL23 | Terminal cover (Long) - Single type, D-handle type, N-handle type | | | | |
| TCS23 | Terminal cover (Short) - Single type, D-handle type, N-handle type | | | | |
| N-40c | Rotary handle (Direct) | | | | |
| DH125 | Rotary handle (Direct) | | | | |
| DHK125 | Rotary handle (Direct, key lock) | | | | |
| EH125 | Rotary handle (Extended) | | | | |
| RTB2 | Rear terminal (Bar) | | | | |
| RTR2 | Rear terminal (Round) | | | | |
| Handle lock | | | | | |

- Note) For more detail see 7-9 ~ 7-23 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

250AF ELCB EBN250c, EBS250c, EBH250c

EBN203c



EBS203c

For more information

 Accessories ▶ 7-1 page Trip curves ▶ 8-3 page Drawings ▶ 9-11 page • Connection and mounting ▶10-2 page

Ratings

| Frame size | | | | 250 | AF | | |
|--------------------------------|------------------------|--|------------|------------------|------------|------------|--------------|
| Type and pole | | N-ty | /ре | S-t | ype | H-ty | /ре |
| | 2-pole (2-sensor) | EBN | 202c | - | | - | |
| | 3-pole (3-sensor) | EBN | 203c | EBS | 203c | EBH | 203c |
| | 4-pole (3-sensor) | - | | EBS204c | | EBH | 204c |
| Rated current, In | | | 100-12 | 25-150-17 | 5-200-22 | 5-250A | |
| Rated impulse withstand volt | age, Uimp | | | 61 | κV | | |
| | lual current, l△n | 30, 100 | 0, 100/20 | 0/500, 10 | 0/300/500 | mA (Adjus | stable) |
| Instantaneous type Residual cu | urrent off-time at I△n | | | ≤0. | 1 sec | | |
| | rational voltage, Ue | | | | 0/460V | | |
| Time delay | lual current | 0. | .1/0.2/0.5 | 5/1A, 0.1/0 |).4/1/2A (| Adjustable |) |
| type Intentional | time delay | | 0/0.2/0.5 | /1s, 0.5/1 | /1.5/2s (A | djustable) | |
| Wiring system | 2-pole (2-sensor) | | | | 2W | | |
| | 3-pole (3-sensor) | | | | 3W, 3Ø3\ | | |
| | 4-pole (3-sensor) | | 1Ø2V | V, 1Ø3W, | 3Ø3W, 3 | 8Ø4W | |
| Rated short-circuit breaking | g | N-type | | S-t | ype | H-type | |
| capacity, lcu | AC 460V | 26kA | | 37kA | | 50kA | |
| | 415V | 26kA | | 37kA | | 50kA | |
| | 220/250V | 65kA | | 85kA | | 100kA | |
| lcs=%xlcu | | 100% 100% | | 100% | | | |
| Protective function | | Overload, short-circuit and ground fault | | | | | |
| Type of trip unit | | Thermal-magnetic | | | | | |
| Magnetic trip range | | 12×ln | | | | | |
| Life cycle Note5) | Mechanical | 20,000 operations | | | | | |
| | Electrical | | | 5,000 op | perations | | |
| Connection | Standard | | | Front connection | | | |
| | Optional | Rear connection | | | | | |
| Mounting | Standard | Screw fixing | | | | | |
| Dimensions (mm) | Pole | 2p | Зр | 3р | 4p | 3р | 4p |
| a d c2 | a | 105 | 105 | 105 | 140 | 105 | 140 |
| | <u>b</u> | 16 | | | 65 | 16 | |
| | c1 Note1) | 60 | | | 0 | 60 | |
| | c2 Note1) | 64 | | | 4 | 6- | |
| | d | 8 | | | 7 | 8 | |
| Weight, kg | Standard | 1.1 | 1.2 | 1.2 | 1.5 | 1.2 | 1.5 |
| Certification | Pole (€ | 2p | Зр | 3р | 4p | 3р | 4p |
| CE marking | C |) | (|) | C |) | |

Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut

- 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

 3. 4-pole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.

 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.

 5. Life cycle means not guarantee but limitation

 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

Instantaneous type

| instantaneous type | | | | | | | |
|--------------------|---------------------|------|---------------|---|-------------|------------------------|--|
| EE | 2 | 250 | | / | 30 | | |
| Code | Frame size/ Pole | Code | Rated current | | Code | Rated residual current | |
| EBN202c | EBN 250AF 2P | 100 | 100A | | 30 | 30mA | |
| EBN203c | EBN 250AF 3P | 125 | 125A | | 100 | 100mA | |
| EBS203c | EBS 250AF 3P | 150 | 150A | | 100/200/500 | 100/200/500mA | |
| EBS204c | EBS 250AF 4P | 175 | 175A | | 100/300/500 | 100/300/500mA | |
| EBH203c | EBH 250AF 3P | 200 | 200A | | | | |
| EBH204c | EBH 250AF 4P | 225 | 225A | | | | |
| | | 250 | 250A | | | | |


Note) EBS203c/250/30: EBS203c, Rated current 250A, Rated residual current 30mA

Time delay type

| EE | 3S203c / | 2 | 250 | / | 1A1s | |
|---------|---------------------|------|---------------|------|------------------------|------------------------|
| Code | Frame size/ Pole | Code | Rated current | Code | Rated residual current | Intentional time delay |
| EBN202c | EBN 250AF 2P | 100 | 100A | 1A1s | 1A | 1s |
| EBN203c | EBN 250AF 3P | 125 | 125A | 2A2s | 2A | 2s |
| EBS203c | EBS 250AF 3P | 150 | 150A | | | |
| EBS204c | EBS 250AF 4P | 175 | 175A | | | |
| EBH203c | EBH 250AF 3P | 200 | 200A | | | |
| EBH204c | EBH 250AF 4P | 225 | 225A | | | |
| | | 250 | 250A | | | |

Note) EBS203c/250/30: EBS203c, Rated current 250A, Time delay type 1A1s

Accessories



Electrical auxiliaries


| AX | Auxiliary switch |
|-------|--------------------|
| AL | Alarm switch |
| AX+AL | Combination switch |
| | |



Maximum possibilities

| T-position Not available | | Not available |
|--------------------------|------------|-----------------------------|
| | R-position | Option of AX or AL or AX+AL |

Note) For more detail see 7-1 page



| EBN250c EBS250c EBH250c | Name | | | | | |
|-------------------------------|--|--|--|--|--|--|
| IB23 | Insulation barrier | | | | | |
| TCL33 | Terminal cover (Long) - Single type, D-handle type, N-handle type | | | | | |
| TCS33 | Terminal cover (Short) - Single type, D-handle type, N-handle type | | | | | |
| N-50c | Rotary handle (Direct) | | | | | |
| DH250 | Rotary handle (Direct) | | | | | |
| DHK250 | Rotary handle (Direct, key lock) | | | | | |
| EH250 | Rotary handle (Extended) | | | | | |
| RTB3 | Rear terminal (Bar) | | | | | |
| RTR3 | Rear terminal (Round) | | | | | |
| Handle lock | | | | | | |

- Note) For more detail see7-9 ~ 7-23 page

 Single type: This cover is used without auxiliary handle.

 D-handle type: This cover is used with D-handle.

 N-handle type: This cover is used with N-handle.

400AF ELCB EBN400c, EBS400c, EBH400c, EBL400c





EBL404c

For more information

 Accessories ▶ 7-2 page • Trip curves ▶ 8-4 page Drawings ▶ 9-12 page • Connection and mounting ▶10-3 page

Ratings

| Frame size | | | | 400AF | | | | | | | |
|--|------------------|---------------------|--|----------------|---------|---------|---------|---------|--------|------|--|
| Type and pole | | | N-ty | уре | S-ty | уре | H-ty | уре | L-ty | уре | |
| 3 | | 3-pole (3-sensor) | EBN | 403c | EBS | 403c | EBH403c | | EBL | 403c | |
| | | 4-pole (3-sensor) | EBN | 404c | EBS | 404c | EBH | 404c | EBL | 404c | |
| Rated current, | 250-300-350-400A | | | | | | | | | | |
| Rated impulse v | withstand voltag | je, Uimp | 6kV | | | | | | | | |
| Rated operation | nal voltage, Ue | | 220/460V | | | | | | | | |
| Instantaneous | Rated residua | al current, I∆n | | 30 | , 100/2 | 00/500 | mA (Ad | djustab | le) | | |
| type | Residual curr | ent off-time at I△n | ≤0.1 sec | | | | | | | | |
| Time delay | Rated residua | al current | | | 0.1/0 | .4/1/2A | (Adjus | table) | | | |
| type | Intentional tim | ne delay | | | 0.5/1 | /1.5/2s | (Adjust | able) | | | |
| Wiring system | | 3-pole (3-sensor) | 1Ø2W, 1Ø3W, 3Ø3W | | | | | | | | |
| | | 4-pole (3-sensor) | | 1 | Ø2W, | 1Ø3W, | 3Ø3W | , 3Ø4V | ٧ | | |
| Rated short-cir | rcuit breaking | | N-t | уре | S-ty | уре | H-t | уре | L-type | | |
| capacity, Icu | | AC 415V/460V | 37kA | | 50 | kA | 65kA | | 85kA | | |
| | | 220/250V | 50kA | | 75 | kA | 85k | | 125kA | | |
| lcs=%×lcu | | | 100 | 100% 100% 100% | | 0% | 75% | | | | |
| Protective function Type of trip unit | | | Overload, short-circuit and ground fault | | | | | | | | |
| | | | Thermal-magnetic | | | | | | | | |
| Magnetic trip ra | ange | | 8~12ln | | | | | | | | |
| Life cycle Note5 | | Mechanical | 4,000 operations | | | | | | | | |
| | | Electrical | 1,000 operations | | | | | | | | |
| Connection | | Standard | Front connection | | | | | | | | |
| Mounting | | Standard | Screw fixing | | | | | | | | |
| Dimensions (r | nm) | Pole | Зр | 4p | Зр | 4p | Зр | 4p | Зр | 4р | |
| | d | а | 140 | 184 | 140 | 184 | 140 | 184 | 140 | 184 | |
| a A A A | c1 | b | 25 | 57 | 25 | 57 | 25 | 57 | 25 | 57 | |
| | | c1 Note1) | 109 | | 109 | | 109 | | 109 | | |
| | I | c2 Note1) | 113 | | 113 | | 113 | | 113 | | |
| | | d | 14 | 45 | 14 | 15 | 14 | 15 | 14 | 15 | |
| Weight, kg | | Standard | 7 | 8.4 | 7 | 8.4 | 7 | 8.4 | 7 | 8.4 | |
| Certification | | Pole | Зр | 4p | Зр | 4p | Зр | 4p | Зр | 4р | |
| | CE marking | (€ | C |) | C | | (|) | (|) | |

Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut

- 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

- 4. Apole product's ampacity on neutral conductor is equal to or less than 50% of the rated current.
 4. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 5. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Breaker types

EBS403c

EBS404c

EBH403c

EBH404c

EBL403c

EBL404c

Instantaneous type EBS403c 400 30 Frame size/ Pole Rated residual Rated Code Code Code current current EBN403c EBN 400AF 3P 250 250A 30 30mA EBN404c EBN 400AF 4P 300 300A 100/200/500 100/200/500mA

350A

400A

350

400

Note) EBS403c/400/30: EBS403c, Rated current 400A, Rated residual current 30mA

EBS 400AF 3P

EBS 400AF 4P

EBH 400AF 3P

EBH 400AF 4P

EBH 400AF 3P

EBH 400AF 4P

Time delay type

| EBS403c | | 3S403c / | 4 | 100 | / | 2A2s | |
|---------|---------|---------------------|------|---------------|------|------------------------|------------------------|
| | Code | Frame size/ Pole | Code | Rated current | Code | Rated residual current | Intentional time delay |
| | EBN403c | EBN 400AF 3P | 250 | 250A | 2A2s | 2A | 2s |
| | EBN404c | EBN 400AF 4P | 300 | 300A | | | |
| | EBS403c | EBS 400AF 3P | 350 | 350A | | | |
| | EBS404c | EBS 400AF 4P | 400 | 400A | | | |
| | EBH403c | EBH 400AF 3P | | | | | |
| | EBH404c | EBH 400AF 4P | | | | | |
| | EBL403c | EBH 400AF 3P | | | | | |
| | EBL404c | EBH 400AF 4P | | | | | |

Note) EBS403c/400/30: EBS403c, Rated current 400A, Time delay type 2A2s

Accessories





Electrical auxiliaries


| A | K | Auxiliary switch |
|----|----|-------------------|
| Al | L | Alarm switch |
| SH | IT | Shunt trip |
| UV | Т | Undervoltage trip |
| | | |




Maximum possibilities

| T-position | Not available |
|------------|-----------------------------------|
| R-position | Option of 2AX, 2AL and SHT or UVT |

Note) For more detail see 7-2 page





External accessories

| B-43B | Insulation barrier |
|--------|---|
| T1-43A | Terminal cover (Long) - 2, 3pole - Single type, N-handle type |
| T1-44A | Terminal cover (Long) - 4pole |
| N-70 | Rotary handle (Direct) |
| E-70U | Rotary handle (Extended) |
| MI-43 | Mechanical interlock - 2, 3pole |
| MI-44 | Mechanical interlock - 4pole |

Note) For more detail see7-9 ~ 7-23 page

800AF ELCB EBN803c, EBS803c, EBL803c

EBS803c

Ratings

| Frame size | | | | | 800AF | | | | | |
|-------------------|------------------|--------------------|---------------------|--|--------------------------------|----------------------|---------|--|--|--|
| Type and pole | | | | N-type | | S-type | L-type | | | |
| | | 3-ро | le (3-sensor) | EBN8 | 303c | EBS803c | EBL803c | | | |
| | | 4-po | le (3-sensor) | - | | 1 | - | | | |
| Rated current, In | | | | 500-630-700-800A | | | | | | |
| Rated impulse v | vithstand voltag | e, Uim | ıp | | | 6 kV | | | | |
| Rated operation | al voltage, Ue | | | 220/460V | | | | | | |
| Instantaneous | Rated residua | al curre | ıl current, I∆n | | 30, 100/200/500mA (Adjustable) | | | | | |
| type | Residual curr | ent off | ent off-time at I△n | | | ≤0.1 sec | | | | |
| Time delay | Rated residua | al curre | ent | | 0.1 | 1/0.4/1/2A (Adjustat | ole) | | | |
| type | Intentional tim | ntional time delay | | | 0.9 | 5/1/1.5/2s (Adjustab | ole) | | | |
| Wiring system | | 3-ро | le (3-sensor) | | 1 | Ø2W, 1Ø3W, 3Ø3\ | N | | | |
| | | 4-pole (3-sensor) | | | | - | | | | |
| Rated short-cir | cuit breaking | | | N-ty | ре | S-type | L-type | | | |
| capacity, lcu | | AC | 415/460V | 37kA | | 65kA | 85kA | | | |
| | | | 220/250V | 50kA | | 85kA | 125kA | | | |
| lcs=%×lcu | | | | 100 |)% | 100% | 75% | | | |
| Protective fun | ction | | | Overload, short-circuit and ground fault | | | | | | |
| Type of trip uni | t | | | Thermal-magnetic | | | | | | |
| Magnetic trip ra | ange | | | 8~12ln | | | | | | |
| Life cycle Note4) | | Mechanical | | 2,500 operations | | | | | | |
| | | Electrical | | 500 operations | | | | | | |
| Connection | | Standard | | Front connection | | | | | | |
| Mounting | | Standard | | Screw fixing | | | | | | |
| Dimensions (n | nm) | | Pole | | | Зр | | | | |
| | _d | a | | 210 | | | | | | |
| a | c2 c1 | | b | 280 | | | | | | |
| | | c1 Note1) | | 109 | | | | | | |
| | | | c2 Note1) | 113 | | | | | | |
| <u> 2 2 J </u> | | | d | | | 145 | | | | |
| Weight, kg | | | Standard | | | 11.5 | | | | |
| Certification | | | Pole | 3p | | | | | | |
| | CE marking | | (€ | | 0 | | | | | |

For more information


- Accessories ▶ 7-2 page • Trip curves ▶ 8-4 page
- Drawings ▶ 9-14 page
- Connection and mounting ▶10-3 page
- Note) 1. Depth by door cut size: c1 for large cut, c2 for small cut
 2. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.
 3. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.
 4. Life cycle means not guarantee but limitation
 (Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Ordering types

Breaker types

Instantaneous type EBS803c 800 30 Rated residual Frame size/ Rated Code Code Code Pole current current EBN803c EBN 800AF 3P 500 500A 30 30mA EBS803c EBS 800AF 3P 630 630A 100/200/500 100/200/500mA EBL803c EBH 800AF 3P 700 700A 800 800A

Note) EBS803c/800/30: EBS803c, Rated current 800A, Rated residual current 30mA

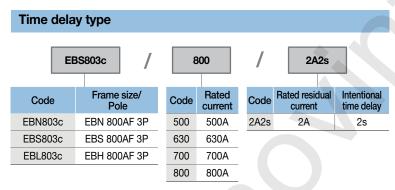

Note) EBS803c/800/30: EBS803c, Rated current 800A, Time delay type 2A2s

Accessories





Electrical auxiliaries


| AX | Auxiliary switch |
|-----|-------------------|
| AL | Alarm switch |
| SHT | Shunt trip |
| UVT | Undervoltage trip |
| | |




Maximum possibilities

| T-position | Not available |
|------------|-----------------------------------|
| R-position | Option of 2AX, 2AL and SHT or UVT |

Note) For more detail see 7-2 page





External accessories

| B-33C | Insulation barrier |
|--------|---|
| T1-63A | Terminal cover (Long) - 2, 3pole - Single type, N-handle type |
| T1-64A | Terminal cover (Long) - 4pole |
| N-80 | Rotary handle (Direct) |
| E-80U | Rotary handle (Extended) |
| MI-83S | Mechanical interlock - 2, 3pole |
| MI-84S | Mechanical interlock - 4pole |

Note) For more detail see 7-9 \sim 7-23 page

1000/1200AF ELCB EBS1003b, EBS1203b

① Adjustable instantaneous

for each phase

For more information • Trip curves ▶ 8-5 page Drawings ▶ 9-14 page

Ratings

| Frame size | | | 1000 | AF | 1200AF | | |
|------------------------|-------------|-----------|--|-----------------|-----------------------|--|--|
| Type and pole | | | S-type | | S-type | | |
| | 3-pole (| 3-sensor) | EBS10 | 003b | EBS1203b | | |
| | 4-pole (| 3-sensor) | - | | | | |
| Rated current, In | | | 1000 | 1200A | | | |
| Rated residual curre | nt, I∆n | | | 100/200/500m | nA (Adjustable) | | |
| Residual current off-t | time at I∆r | 1 | | ≤0. | 1 sec | | |
| Rated operational vo | ltage, Ue | | | AC: 460V | | | |
| Wiring system | 3-pole (| 3-sensor) | | 1Ø2W, 1Ø | 3W, 3Ø3W | | |
| Rated short-circuit | breaking | | S-Ty | ре | S-Type | | |
| capacity, Icu | AC | 415/460V | | 85kA | | | |
| | | 220/250V | 125kA | | | | |
| Protective function | n | | Overl | oad, short-cire | cuit and ground fault | | |
| Type of trip unit | | | Thermal-magnetic | | | | |
| Magnetic trip range | | | | 3~6× | In① | | |
| Life cycle Note3) | Mechan | ical | 2,500 operations | | | | |
| | Electrica | al | 500 operations Front connection Screw fixing | | | | |
| Connection | Standar | d | | | | | |
| Mounting | Standar | d | | | | | |
| Dimensions (mm) | | Pole | 3p | | | | |
| a | c2 c1 | а | 220 | | | | |
| | | b | 565 | | | | |
| | | С | | 1 | 05 | | |
| | | d | | 1 | 59 | | |
| Weight, kg | | Standard | | 2 | 7.1 | | |

Note) 1. Do not test withstand voltage or insulation resistance test between poles to avoid the damage of the PCB.

2. Rated non-trip current sensitivity is equal to or less than 50% of the rated current sensitivity.

3. Life cycle means not guarantee but limitation

(Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee.)

Ordering types

Breaker types

| EBS type (85kA/460V) | | | |
|----------------------|--------------------|--|--|
| Rated current, In | 3-pole | | |
| 1000 A | EBS1003b/1,000/100 | | |
| 1200 A | EBS1203b/1200/100 | | |

Contact operation for auxiliary and alarm switches

| МССВ | On | Off | Trip |
|------|---------------------|----------------------|----------------------------------|
| AX | AXc1 (20) (21) (30) | AXc1 | O—AXa1 (20) O—AXb1 (30) |
| AL | ALc1 (13) | (11) (11) (12) | ALc1 (11) (12) |

Option of below items for T-position

| AX1 | Auxiliary switch (1c) | | |
|---------|------------------------------------|--|--|
| AL1 | Alarm switch (1c) | | |
| AX1+AL1 | Auxiliary (1c) + Alarm (1c) switch | | |


Note) R-position is not available.



Contact rating for auxiliary and alarm switches

| | | AC | | | DC | | |
|---|---------|----------------|----------------|---------|----------------|----------------|--|
| ٧ | Voltage | Curre | ent (A) | Voltage | Current (A) | | |
| | (V) | Resistive load | Inductive load | (V) | Resistive load | Inductive load | |
| | 125 | 20 | 20 | 30 | 6 | 5 | |
| | 250 | 20 | 20 | 125 | 0.4 | 0.05 | |
| | 500 | 10 | 5 | 250 | 0.2 | 0.03 | |

Electrical auxiliaries of 100~250AF

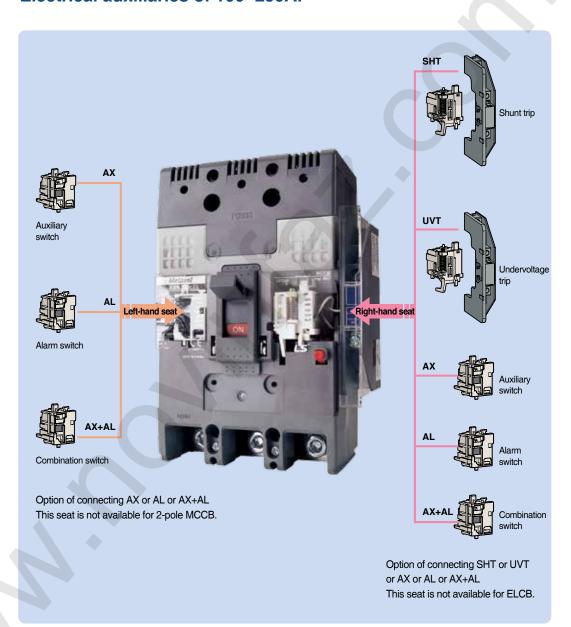

Maximum possibilities

| Position | Туре | ABN | 1100c | ABH | 125c | ABH250c | EBN100c | EBH125c | EBH250c |
|-------------|---------|-----|-------|-----|------|---------|---------|---------|---------|
| Position | | 2p | 3/4p | 2p | 3/4p | 2/3/4p | 2/3/4p | 3/4p | 2/3/4p |
| l oft board | AX | - | 1 | - | 1 | 1 | 1 | 1 | 1 |
| Left-hand | AL | - | 1 | - | 1 | 1 | 1 | 1 | 1 |
| seat | AX+AL | - | 1 | - | 1 | 1 | 1 | 1 | 1 |
| | AX | 1 | 1 | 1 | 1 | 1 | - | - | - |
| Right-hand | AL | 1 | 1 | 1 | 1 | 1 | - | - | - |
| seat | AX+AL | 1 | 1 | 1 | 1 | 1 | - | - | - |
| | SHT/UVT | 1 | 1 | 1 | 1 | 1 | - | - | - |

Electrical auxiliaries of 400~800AF



Maximum possibilities

| Position | Туре | MCCB (400∼800 AF) | ELCB (400~800AF) |
|-----------------|---------|------------------------------|---------------------|
| Left-hand | AX | 2 | 2 |
| seat | AL | 2 | 2 |
| Seat | SHT/UVT | 1 | 1 |
| Dight hand | AX | 2 | - |
| Right-hand seat | AL | 2 | - |
| Seat | SHT/UVT | 1 | - |

Combinations of accessories

Left-hand seat Main breaker

Auxiliary switch (AX)

Alarm switch (AL) Shunt trip (SHT) / Undervoltage trip (UVT)

| | Series | | | MCCB (30~250A | F) | MCCB (400~800AF) | MCCB (1,000~1200AF) |
|------|--------------|---------|---------|---|--|---|--|
| | N-type | ABE 32b | ABE 33b | ABN 52c ABN 62c ABN 102c/102e | ABN 53c/54c ABN 63c/64c ABN 103c/104c, ABN 103e/104e ABN 202c/203c/204c | ABN 402c/403c/404c ABN 802c/803c/804c | - |
| Туре | S-type | - | - | ABS 32c ABS 52c ABS 62c ABS 102c | ABS 33c/34c ABS 53c/54c ABS 63c/64c ABS 103c/104c ABS 202c/203c/204c | ABS 402c/403c/404c ABS 802c/803c/804c | ABS 1003b ABS 1004b ABS 1203b ABS 1204b ABS 1203bE |
| | H-type | - | - | ABH 52c ABH 102c | ABH 53c/54c ABH 103c/104c ABH202c/203c/204c | ABH 402c/403c/404c | - |
| | L-type | - | - | ABL 102c | ABL 103c/104c ABL 202c/203c/204c | ABL 402c/403c/404c ABL 802c/803c/804c | ABL 1003b ABL 1004b ABL 1203b ABL 1204b |
| Pole | | 2 pole | 3 pole | 2 pole | 2, 3, 4 pole | 2, 3, 4 pole | 3, 4 pole |
| AX | | 0 | 0 | • 0 | | | |
| AX2 | | | | \ | 0 • 0 | | 00 |
| АХЗ | (4) | | | | | 00 00 | |
| AL | | • • | • | • | •H H• | • | • |
| AL2 | | | | | • • | • • | -: |
| AL3 | (4) | | | | | •• •(•) | |
| SHT | (UVT) | | | | | | |
| SHT | (UVT) 2 | | | | | | |
| AX+ | AL | | • | • | | • • | |
| AX+ | AL2 | | | | | • • • • • • • • • • • • • • • • • • • | |
| AX+ | AL3 (4) | | | | | $ \bigcirc \qquad \qquad \bigcirc \qquad \bigcirc \qquad \bigcirc $ | |
| AX2- | +AL | | | | | 00 | |
| AX2- | +AL2 | | | | | 00 | |
| AX2 | +AL3 (4) | | | | | | |
| АХЗ | (4) +AL | | | | | 00 00 | |
| АХЗ | (4) +AL2 | | | | | ● ● O(O) | |
| АХЗ | (4) +AL3 (4) | | | | | | |
| AX+ | SHT (UVT) | 0 🔳 🛘 | | | ○ ■ □ | 0 | |

Left-hand seat Auxiliary switch (AX)

Alarm switch (AL) Shunt trip (SHT) / Undervoltage trip (UVT)

| | Series | | | MCCB (30~250AF | F) | MCCB (400~800AF) | MCCB (1,000~1200AF) |
|-------------------|-----------------------|---------|---------|---|--|--|--|
| | N-type | ABE 32b | ABE 33b | ABN 52c ABN 62c ABN 102c/102d/102e | ABN 53c/54c ABN 63c/64c ABN 103c/104c, ABN 103e/104e ABN 202c/203c/204c | ABN 402c/403c/404c ABN 802c/803c/804c | |
| Туре | S-type | - | - | ABS 32c ABS 52c ABS 62c ABS 102c | ABS 33c/34c ABS 53c/54c ABS 63c/64c ABS 103c/104c ABS 202c/203c/204c | ABS 402c/403c/404c ABS 802c/803c/804c | ABS 1003b ABS 1004b ABS 1203b ABS 1204b ABS 1203bE |
| | H-type | - | - | ABH 52c ABH 102c | ABH 53c/54c ABH 103c/104c ABH202c/203c/204c | ABH 402c/403c/404c | - |
| | L-type | - | - | ABL 102c | ABL 103c/104c ABL 202c/203c/204c | ABL 402c/403c/404c ABL 802c/803c/804c | ABL 1003b ABL 1004b ABL 1203b ABL 1204b |
| Pole | | 2 pole | 3 pole | 2 pole | 2, 3, 4 pole | 2, 3, 4 pole | 3, 4 pole |
| AX+S | HT (UVT) 2 | | | | | | |
| AX2+ | SHT (UVT) | | | | | 000 | |
| AX2+ | SHT (UVT) 2 | | | | | | |
| AX3 (| 4)+SHT (UVT) | | | | | 000 000 | |
| AX3 (| 4)+SHT (UVT) 2 | | | | | | |
| AL+S | HT (UVT) | • □ | | | | •□ • | |
| AL+S | HT (UVT) 2 | | | | | •□■□ | |
| AL2+ | SHT (UVT) | | | | | | |
| AL2+ | SHT (UVT) 2 | | | | | | |
| AL3 (| 4) +SHT (UVT) | | | | | | |
| AL3 (| 4) +SHT (UVT) 2 | | | | | | |
| AX+A | L+SHT (UVT) | | | | | | |
| AX+AL+SHT (UVT) 2 | | | | | | | |
| AX2+ | AL2+SHT (UVT) | | | | | | |
| AX2+ | AL2+SHT (UVT) 2 | | | | | | |
| AX3 (4 |)+AL3 (4)+SHT (UVT) | | | | | | |
| AX3 (4 |)+AL3 (4)+SHT (UVT) 2 | | | | | | |


Combinations of accessories

Right-hand seat Left-hand seat Main breaker

- O Auxiliary switch (AX)
- Alarm switch (AL) ☐ Shunt trip (SHT) / Undervoltage trip (UVT)

| | Series | ELCB (30~250AF) | ELCB (400~800AF) | ELCB (1,000~1200AF) | | |
|---------------|---------------|---|---------------------------|------------------------|--|--|
| | N-type | EBN 52c/53c/54c EBN 63c EBN 102c/103c/104c EBN 202c/203c | EBN 403c/404c EBN 803c | - | | |
| Туре | S-type | EBS 32c/33c/34c EBS 53c/54c EBS 63c/64c EBS 103c/104c EBS 203c/204c | EBS 403c/404c EBS 803c | EBS 1003b EBS 1203b | | |
| | H-type | EBH 53c/54c EBH 53c/54c EBH 103c/104c | EBH 403c/404c | - | | |
| | L-type | | EBL 403c/404c EBL 803c | - | | |
| Pole | | 3, 4 pole | 3 pole | 3 pole | | |
| AX | | 0 | 0 | 0 | | |
| AX2 | | | 00 | | | |
| AL | | • • | • | •• | | |
| AL2 | | | •• | | | |
| SHT | (UVT) | | | | | |
| AX+A | AL . | | | | | |
| AX+A | AL2 | | • • • • | | | |
| AX2+ | AL | | 00 | | | |
| AX2+ | AL2 | | | | | |
| AX+S | SHT (UVT) | | 0 | | | |
| AX2+SHT (UVT) | | | 000 | | | |
| AL+S | SHT (UVT) | | | | | |
| AL2+SHT (UVT) | | | | | | |
| AX+A | AL+SHT (UVT) | | | | | |
| AX2+ | AL2+SHT (UVT) | | | | | |

Test lead wire (30~250AF)




- Note) 1. When you touch the lead wire under energized condition, you will be in danger of electric shock.

 2. Do not energize on both ends of lead wire.

 3. Do not pull out the lead wire excessively or impact on the product.

Terminal block type



Auxiliary and alarm switch



Auxiliary switch (AX)

Auxiliary switch is for applications requiring remote "On" and "Off" indication.

Each switch contains two contacts having a common connection.

One is open and the other closed when the circuit breaker is open, and viceversa.




Alarm switch (AL)

Alarm switches offer provisions for immediate audio or visual indication of a tripped breaker due to overload, short circuit, shunt trip, or undervoltage release conditions.

They are particularly useful in automated plants where operators must be signaled about changes in the electrical distribution system. This switch features a closed contact when the circuit breaker is tripped automatically. In other words, this switch does not function when the breaker is operated manually.

Its contact is open when the circuit breaker is reset.



Combination switch (AX+AL)

It consists of one auxiliary switch (AX) and one alarm switch (AL) in a body to connect into the same position of the breaker.


Contact (AX+AL)

| МССВ | On | Off | Trip |
|------|--------------------------|----------|--------------------------|
| AX | AXc1 — O — AXa1 O — AXb1 | AXc1 ——o | O |
| AL | ALc1 ——O | O | ALc1 — O — ALa1 O — ALb1 |

Rating (AX+AL)

| Conventional thermal current, Ith | | 5 A | | | | | |
|-----------------------------------|------------|-------------|----------------|----------------|----------------------|-------------------------|--|
| Rated operational current, le | | | Current, le | | | | |
| | | Voltage, Ue | Resistive load | Inductive load | Minimum laod current | Applicable MCCB/ELCB | |
| | AC 50/60Hz | 125V | 5 | 3 | | | |
| | | 250V | 3 | 2 | | Metasol | |
| | | 500V | - | - | 5V DC 160mA | MCCB/ELCB | |
| | DC | 30V | 4 | 3 | 30V DC 30mA | 30~250AF | |
| | | 125V | 0.4 | 0.4 | | 400~800AF | |
| | | 250V | 0.2 | 0.2 | | | |

Shunt trip, SHT



The shunt trip opens the mechanism in response to an externally applied voltage signal. The releases include coil clearing contacts that automatically clear the signal circuit when the breaker has tripped. This is not available for ELCBs of 30~250AF .

Rating for 30~250AF



Terminal block type (TBT)



| Oambu | al collage IIa | Power cor | Power consumption | | |
|-------------------------------------|----------------|-------------|-------------------|--------------|--|
| Control voltage, Ue | | AC (VA) | DC (W) | MCCB/ELCB | |
| Voltage | DC 12V | - / | 1.5 | | |
| | AC/DC 24~30V | 1.5 | 1.5 | | |
| | AC/DC 48~60V | 1.5 | 1.5 | | |
| | AC/DC 100~130V | 1.5 | 1.5 | Metasol MCCB | |
| | AC/DC 200~250V | 1.5 | 1.5 | ABN100c | |
| | AC 380~440V | 1.5 | - | ABH125c | |
| | AC 440~500V | 1.5 | - | ABH250c | |
| Max.opening time | | 50ms (max.) | | | |
| Tightening torque of terminal screw | | 8.2 kg | f · cm | | |

Note: 1. Range of operational voltage: 0.7 ~ 1.1Vn Frequency (Only AC) : 45Hz ~ 65Hz

Rating for 400~800AF




| Control voltage, Ue |
|--|
| AC/DC 24~48V |
| AC 100~240/DC 100~220V |
| AC 380~550V |
| Note: Range of operational voltage AC: 0.85 ~ 1.1Vn |

DC: 0.75 ~ 1.25Vn

| Power consumption | | | | | |
|-------------------|------|-----|--|--|--|
| V | mA | w | | | |
| AC 24 | 14 | 0.3 | | | |
| DC 24 | 15.4 | 0.4 | | | |
| AC 48 | 14 | 0.7 | | | |
| DC 48 | 16 | 0.8 | | | |
| AC 110 | 6 | 0.7 | | | |
| DC 110 | 6.6 | 0.7 | | | |
| AC 220 | 6.8 | 1.5 | | | |
| DC 200 | 7.6 | 1.5 | | | |
| AC 440 | 4.3 | 1.9 | | | |
| AC 480 | 4.4 | 3.3 | | | |
| AC 550 | 4.6 | 2.4 | | | |

Undervoltage release, UVT



The undervoltage release automatically opens a circuit breaker when voltage drops to a value ranging between 20% to 70% of the line voltage. The operation is instantaneous, and after tripping, the circuit breaker cannot be re-closed again until the voltage returns to 85% of line voltage.

Continuously energized, the undervoltage release must be operating before the circuit breaker can be closed. This is not available for ELCBs of $30\sim250$ AF .

- Range of tripping voltage: 0.2 ~ 0.7Vn
- Reset and closing of a breaker is possible when the control voltage is over 0.85Vn
- Frequency (Only AC: 45Hz ~ 65Hz

Rating for 30~250AF



Terminal block type (TBT)

| Contra | ol voltago. No | Power consumption | | | | |
|-------------------------------------|----------------|-------------------|--------|-----|--|--|
| Control voltage, Ue | | AC (VA) | DC (W) | mA | | |
| | AC/DC 24V | 0.64 | 0.65 | 27 | | |
| | AC/DC 48V | 1.09 | 1.1 | 23 | | |
| Valtana | AC/DC 100~110V | 0.73 | 0.75 | 5.8 | | |
| Voltage | AC/DC 200~220V | 1.21 | 1.35 | 5.4 | | |
| | AC 380~440V | 1.67 | - | 3.8 | | |
| | AC 440~480V | 1.68 | - | 3.5 | | |
| Max.opening tin | ne | 50ms (max.) | | | | |
| Tightening torque of terminal screw | | 8.2 kgf ⋅ cm | | | | |
| Operating Trip | | 20~70% Vn | | | | |
| voltage range | Reset/Closing | ≥ 0.85Vn | | | | |

Rating for 400~800AF

| Control voltage, Ue | Trip voltage | Reset/closing voltage | Time rating |
|-------------------------|-----------------------------------|------------------------------------|-------------|
| AC/DC 48 | | | |
| AC/DC 100~125 | 10.05.444 | 10.00.071/ | |
| AC 200~240 / DC 200~240 | · AC: 85~1.1Vn · DC: 85~1.25Vn | · AC: 0.2~0.7Vn · DC: 0.2~0.7Vn | Continuous |
| AC 380~440 | · DC. 65~1.25VII | · DC. 0.2~0.7 VII | |
| AC 440~480 | | | |




Lead wire type (LWT)

Terminal numbering

| Auxiliary switch (AX) | Alarm switch (AL) | Shunt trip (SHT) | Undervoltage trip (UVT) |
|--------------------------------|-------------------|------------------|-------------------------|
| AXb1 AXa1 AXb2 AXa2 AXc1 AXc2 | ALc1 ALc2 ALc2 | S1 S2 | U1 U< |

External accessories

Wide range of external accessories provides user-friendly solution for mounting, cable connection, insulation, safety lock and remote control.

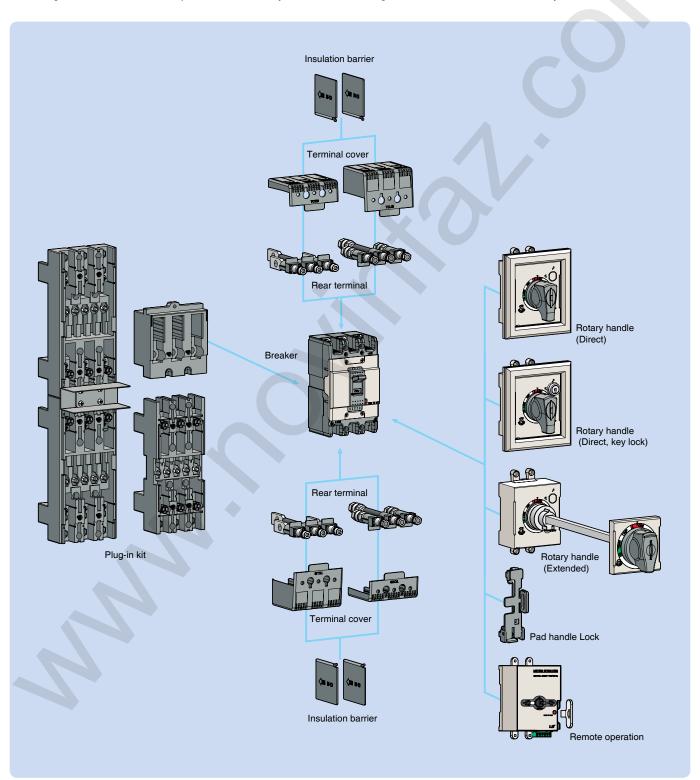

Direct type



Direct type (DH 30~250AF)



Key lock (DH 30~250AF)



(N 30~250AF)



(N 400~800AF)

Rotary handles

The rotary handle operating mechanism is available in either the direct version or in the extended version on the compartment door. It is always fitted with a compartment door lock and on a request it can be supplied with a key lock in the open position.

Direct type, D-handle and N-handle

- D-handle: Directly mountable to a circuit breaker. Trip button is built as standard. Key lock type is optional.
- N-handle: Directly mountable to a circuit breaker. Door is locked in the Off state. handle size is greater than D-handle.

Extended type, E-handle

It is used in case direct type handle can not be applied because of the longer distance between the breaker and the panel door.


Type

| Diversit to one | Direct type | | Breaker type | | |
|-----------------|-------------|---------------|--------------------------|-----------------|--|
| Direct type | (Key lock) | Extended type | MCCB | ELCB | |
| N-30c | - | 4 - 1 | ABN50c/60c/100c/100e* | EBN50c/60c/100c | |
| DH100 | DHK100 | EH100 | ABS30c/50c/60c* | EBS30c/50c/60c | |
| N-40c | - | - | ABS125c* ABH50c/125c* | EBS125c | |
| DH125 | DHK125 | EH125 | ABL125c* | EBH50c/125c | |
| N-50c | | - | ABN/S/H/L250c | EBN/S/H250c | |
| DH250 | DHK250 | EH250 | ADIN/5/H/L250C | EBIN/5/FI250C | |
| N-70 | - | E-70U | ABN/S/H/L400c | EBN/S/H/L400c | |
| N-80 | | E-80U | ABN/S/L800c | EBN/S/L800c | |

Extended type





(30~250AF)




(400~800AF)

Type suffix according to the mounting position








Note: Padlock type for N-handle
- On or Off state type - Only Off state type
* DH100 and DH125 cannot be mounted on 2-pole products.


D-handle


MCCB and **D**-handle

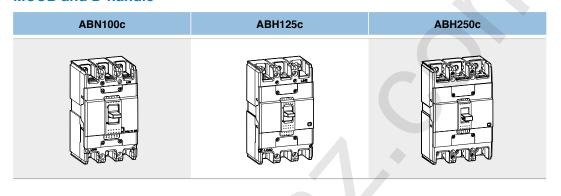





Tripping MCCB & install type

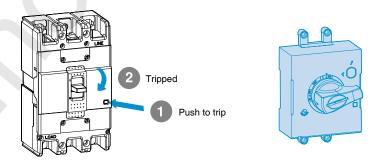


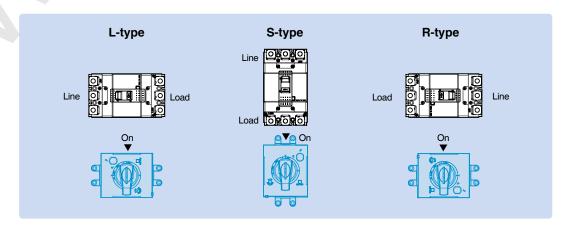

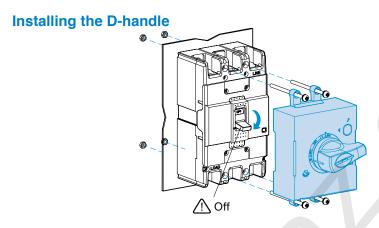

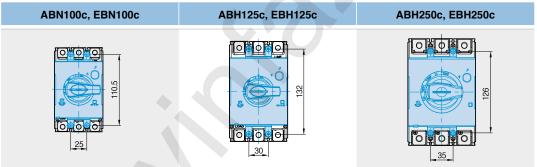

Cutting panel

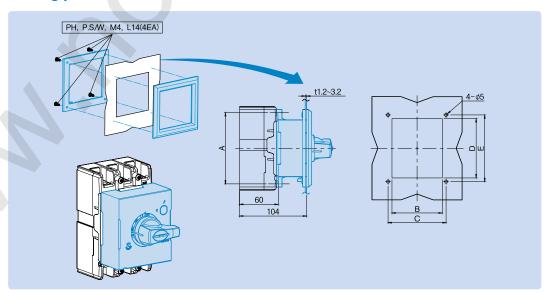

| Direct type | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | Breaker |
|-------------|--------|--------|--------|--------|--------|---------|
| DH100 | 110.5 | 78 | 90 | 92 | 103.4 | 100AF |
| DH125 | 132 | 94 | 105 | 108 | 120 | 125AF |
| DH250 | 126 | 108 | 121 | 110 | 122 | 250AF |


D-handle

Operating test


△ CAUTION

If the door is opened with much pressure when the position of handle is On or trip, the handle lock lever will be demaged.

Trip position: Panel door can't be opened

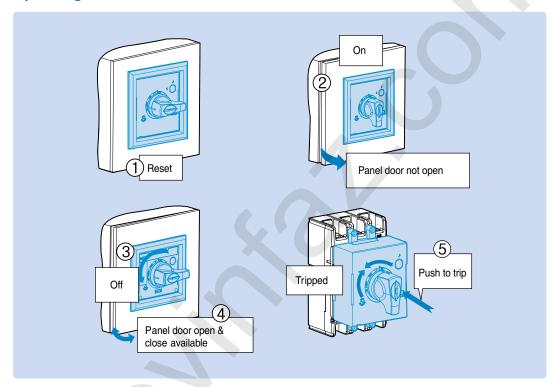


Locking system

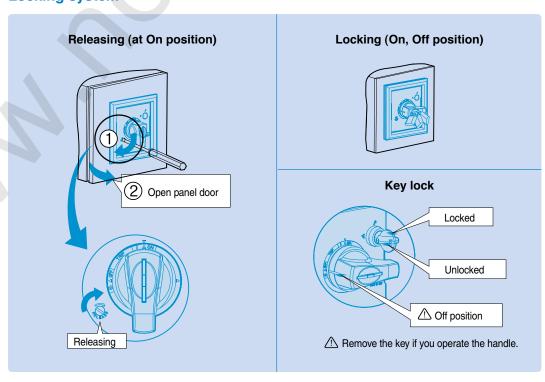



E-handle

MCCB and **E**-handle

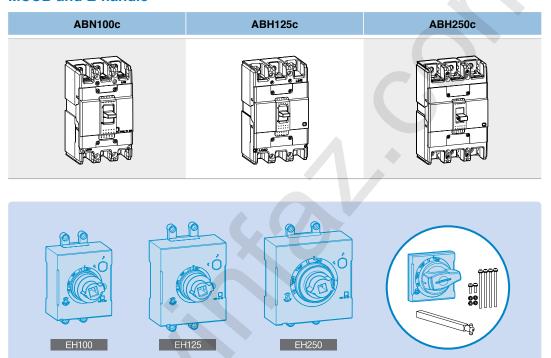


Tripping MCCB & install type

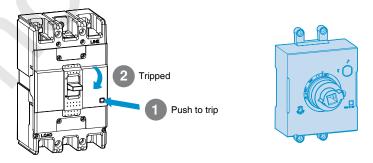

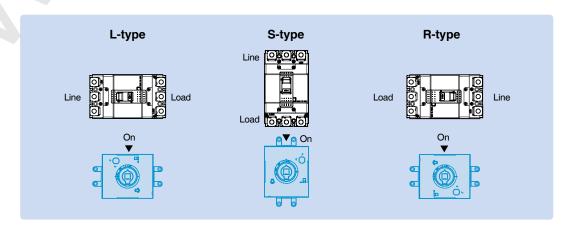


E-handle

Installing the E-handle





Cutting panel

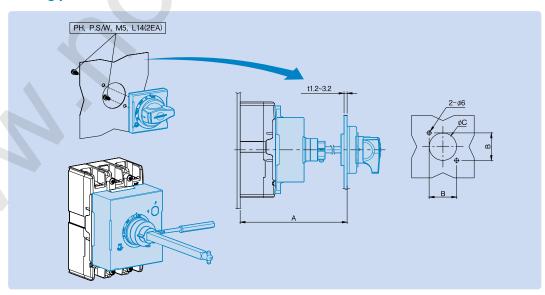

| E-handle | A (mm) | B (mm) | C (mm) | Breaker |
|----------|---------------------------------|--------|--------|---------|
| EH100 | min 150, max 573.5 (Shaft469mm) | 47 | Ø53 | 100AF |
| EH125 | min 150, max 573.5 (Shaft469mm) | 47 | Ø53 | 125AF |
| EH250 | min 150, max 571.5 (Shaft469mm) | 47 | Ø53 | 250AF |


Note: An extension shaft that must be adjusted to the distance between back of circuit breaker and door

Operating test




If the door is opened with much pressure when the position of handle is On or trip, the handle lock lever will be demaged.

Trip position: Panel door can't be opened

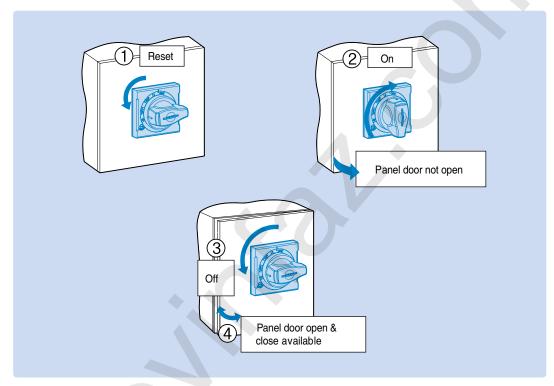

Locking system

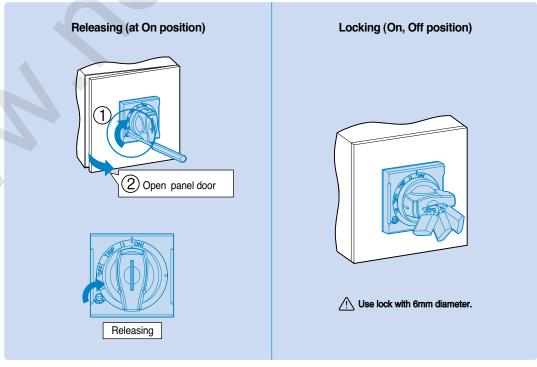


 $Note: In \ case \ of \ EH100/125/250 \ Semi\ Type, \ it \ is \ possible \ to \ lock \ E-handle \ only \ in \ the \ condition \ of \ OFF.$

N-handle

How to mount

1) Drilling on the panel door


- ① All the N handles require the same size of mounting hole.
- 2 Drill the holes according to the Fig. 1

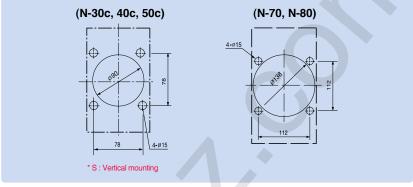

<Fig 1>

(2) Mounting base

- Prepare a mounting base according to the Fig. 2.
 The distance between the door panel and the mounting base should be A+2.
 Dimension A is shown in the Fig.
- ② In the case of horizontal mounting turn the breaker mounting holes by 90 degrees

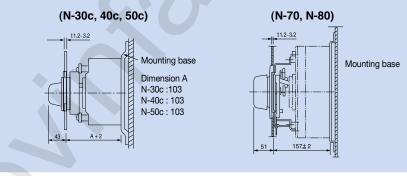


<Fig 2>

(N-70, N-80)


(3) Fixing

- Fixing a breaker and a handle at the same time.
 - a) As shown in the Fig. 3 a breaker and a handle can be fixed at the same time on a mounting base with the 4 (long) screws enclosed.

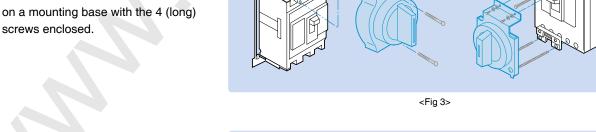

(N-30c, 40c, 50c)

b) Have the breaker handle and the lever of N handle be located in the position shown in Fig. 4.

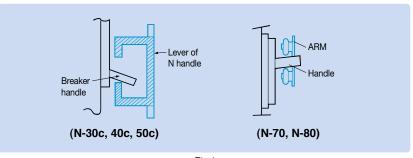

<Fig 4>


- ② Fixing a handle and a breaker step by step
 - a) Check if there is any thin membrane in the mounting hole of the breaker cover and remove it, If exists.
 - b) Have the breaker handle and the lever of N handle be located in the position shown in Fig. 4.
 - c) Fix the N handle on the breaker with the 2 (Short) screws enclosed.
 - d) Fix the breaker on a mounting base with the 2 (Long) screws


(4) Fixing front plate and lock plate


① Set the front plate and the locking plate on the door as shown in Fig. 6 fix them with screws.




② Adjust if front plate or handle is at tilt against the breaker .








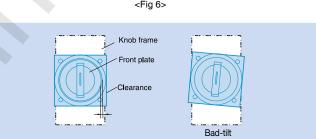



<Fig 5>

Locking pla

<Fig 7>

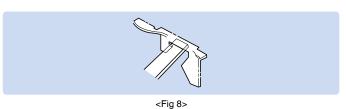

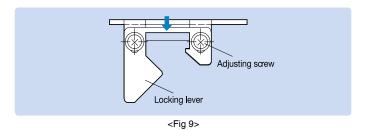


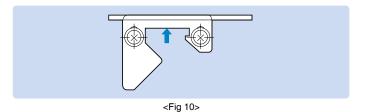


LSELECTRIC 7-18

On(i)

<Fig 11>



<Fig 12>



<Fig 13>

N-handle

(1) Operation in the door closed

- ① To have the breaker On turn the handle to be vertical. <Fig. 11>
- 2 To have the breaker Off turn the handle to be horizontal. <Fig. 12>
- ③ If the breaker is tripped, the handle points to the Trip position.
- ④ To reset the breaker turn the handle to Reset position.

(2) Unlocking the panel door


- 1) The door is locked and will not open at On, Off and Trip status.
- ② To unlock the door from Off or Trip status turn the handle toward OPEN direction. (Unlocked after taking the hand off the handle.)
- 3 To unlock the door from on state turn the Release screw clockwise <Fig. 13>


(3) Operation of the breaker in the door open

- ① When the door is open the breaker will not be on as the lock lever operates.
- ② To release the locking pull the lock lever to be nearly horizontal position. Then the breaker can be closed. <Fig. 14>
- 3 If the door is closed the lock lever will be reset automatically.

Padlocking

- $\ensuremath{\textcircled{1}}$ Lockable at On or Off state with a padlock. (Padlock is not supplied)
 - Lockable at Off state with a padlock is an optional spec.
- 2 Pull the lock plate on the front of the handle and fasten the lock. < Fig. 15>
- ③ If the breaker is tripped after padlocking at on state, the handle will point to the trip.
- 4 Padlock diameter should be 3.5 ~ 6mm






<Fig 14>

Dimensions for N-handle hinges



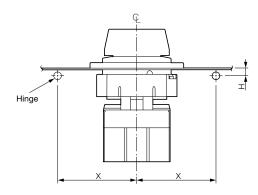

| | | Unit: mm |
|---|------------------|----------|
| ١ | Hinge dimensions | |

| панине | J | |
|-------------------------|-----------|------------------|
| types | Н | X |
| N-30c N-40c N-50c | 0 or more | 5H + 110 or more |
| N-70 N-80 | 0 or more | 5H + 100 or more |

Locking device

It is a handle locking device which is used by being fixed on a breaker. You can use the padlock in the On or Off position of the breaker handle

Fixed locking device


| Locking device types | MCCB | ELCB |
|---------------------------------|---|---|
| Handle Lock, ABN100c | ABS30c, ABS50c, ABS60c, ABN50c, ABN60c, ABN100c, ABN100d, ABN100e | EBS30c, EBS50c, EBS60c, EBN50c, EBN60c, EBN100c |
| Handle Lock, ABH125c | ABS125c, ABH50c, ABH125c, ABL125c | EBS125c, EBH50c, EBH125c |
| Handle Lock, ABH250c | ABN250c, ABS250c, ABH250c, ABL250c | EBN250c, EBS250c, EBH250c |
| Handle Lock, ABE/S/H/L400b~800b | ABN400c, ABS400c, ABH400c, ABL400c, ABN800c, ABS800c, ABL800c | EBN400c, EBS400c, EBH400c, EBL400c, EBN800c, EBS800c, EBL800c |

How to use

The handle lock is designed to be easily attached to the front of the breaker.


- (1) Set the breaker handle to the Off position. (Figures 1 and 2)
- (2) Secure the locking device on the cover of the circuit breaker. (Figures 1 and 2)
- (3) Use the padlock in the On or Off position. (Figures 3, 4 and 5)


• For 100AF/125AF/250AF MCCBs




• For 400AF / 800AF MCCBs

<Fig. 2>






OFF LOCK <Fig. 3>



ON LOCK OFF LOCK



<Fig. 4>

Terminal covers

The terminal covers are applied to the circuit-breaker to prevent accidental contact with live parts and thereby guarantee protection against direct contacts.

Two types by length are available and provide IP20 degree of protection.

Also, covers ara classified in to 2 different type: Independent, Attachable and detachable with D or N handle

• Short type covers, TCS:


For fixed circuit-breakers with rear terminals and for moving parts of plug-in.

· Long type covers, TCL:

For fixed circuit-breakers with front, front extended, front for cables terminals.

| | Terminal covers | | | | | Applied bre | | Size ext | | tended (A), | |
|----------|-----------------|----------|----------|-----------|----------|-------------|----------------------|-------------------|------------|-------------|--|
| | Short type | е | | Long type | | Pole | Applied breaker | | mm | | |
| Inde | D-handle | N-handle | Inde | D-handle | N-handle | | МССВ | ELCB | Short type | Long type | |
| TBS22 | - | - | - | - | - | 2P | ABE30b | | 10 | | |
| TBS23 | - | - | - | - | - | 3P | ABESUD | - | 10 | - | |
| TCS12 | - | - | TCL12 | | | 2P | | | | | |
| TCS/T-12 | - | - | TCL/T-12 | - | - | 21 | | _ | | | |
| TCS13 | TCS13 | TCS13 | TCL13 | TCL13 | TCL13 | 3P | ABN50c/60c/100c/100e | | 5.5 | 30 | |
| TCS/T-13 | TCS/T-13 | TCS/T-13 | TCL/T-13 | TCL/T-13 | TCL/T-13 | 35 | ABS30c/50c/60c | EBN50c/60c/100c | 5.5 | 30 | |
| TCS14 | TCS14 | TCS14 | TCL14 | TCS14 | TCS14 | 4P | FDOOR | | | | |
| TCS/T-14 | TCS/T-14 | TCS/T-14 | | TCL/T-14 | TCL/T-14 | 41 | | | | | |
| TCS22 | - | - | TCL22 | - | - | 2P | | | | | |
| TCS/T-22 | - | - | TCL/T-22 | - | - | 2P | ABS125c | - | | | |
| TCS23 | TC | S23 | TCL23 | TC | L23 | 3P | ABH50c/125c | | <i>- -</i> | 40 | |
| TCS/T-23 | TCS | /T-23 | TCL/T-23 | TCL | T-23 | 35 | ABH50C/125C | EBS125c | 5.5 | 40 | |
| TCS24 | TC | S24 | TCL24 | TC | L24 | 4P | ABL125c | EBH50c/125c | | | |
| TCS/T-24 | TCS | /T-24 | | TCL | T-24 | 4P | | | | | |
| TCS33 | TC | S33 | TCL33 | TC | L33 | 2, 3P | | EBN250c, | | | |
| TCS/T-33 | TCS | /T-33 | TCL/T-33 | TCL | T-33 | 2, 35 | ABN250c, ABS250c | EBS250c | 5.5 | 50 | |
| TCS34 | TC | S34 | TCL34 | TC | L34 | 4P | ABH250c, ABL250c | ED32300 | 5.5 | 50 | |
| TCS/T-34 | TCS | /T-34 | | TCL | T-34 | 46 | | EBH250c | | | |
| - | - | - | T1-43A | - | T1/T-43A | 2, 3P | ABN/S/H/L400c | EBN/S/H/L400c | | 120 | |
| - | - | - | T1-44A | - | - | 4P | ADIN/3/11/L4000 | LDIN/3/11/L400C | - | 120 | |
| - | - | - | T1-63A | - | T1/T-63A | 2, 3P | ABN/S/L630c/800c | EBN/S/L630c/800c | | 141 | |
| - | - | - | T1-64A | - | - | 4P | ADIN/3/L030C/800C | EDIN/5/L630C/800C | - | 141 | |


Note: Terminal covers for 400AF and 800AF MCCBs are in acrylic.

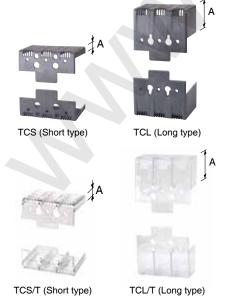



Short type construction







Long type construction


Insulation barriers



Insulation barrier allows the insulation characteristics between the phases at the connections to be increased. They are mounted from the front, even with the circuit-breaker already installed, inserting them into the corresponding slots.

They are incompatible with both the insulating terminal covers.

It is possible to mount the phase separating partitions between two circuit-breakers side by side.



| Tuna | Breaker | | | | |
|-------|---|---|--|--|--|
| Туре | MCCB | ELCB | | | |
| IB-13 | ABN50c/60c/100c/100e ABS30c/50c/60c | EBN50c/60c/100c EBS30c/50c/60c | | | |
| IB-23 | ABS125c ABH50c/125c ABN250c, ABS250c ABH250c ABL125c, ABL250c | EBS125c EBH50c/125c EBN250c, EBS250c EBH250c | | | |
| B-43B | ABN/S/H/L400c | EBN/S/H/L400c | | | |
| B-33C | ABN/S/L800c | EBN/S/L800c | | | |



Insulation barriers for line side are provided as standard.

Rear connection terminals

Rear connection terminals are used to adapt the circuit breakers to switchboards or other applications that require rear connection.

There are two kinds of rear connection terminals.


- Flat type
- Round type

Round type terminals





| Breaker | For 2-pole | For 3-pole | For 4-pole |
|---------------|------------|------------|------------|
| ABN100c 50AF | RTR1-52 | RTR1-53 | - |
| ABN100c 100AF | RTR1-102 | RTR1-103 | RTR1-104 |
| ABH125c | RTR2-102 | RTR2-103 | RTR2-104 |
| ABH250c | RTR3-202 | RTR3-203 | RTR3-204 |

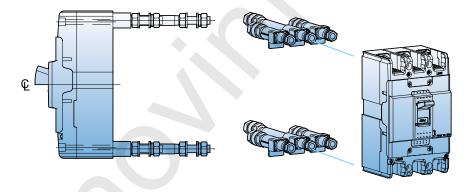






Flat type terminals


| Breaker | For 2-pole | For 3-pole | For 4-pole |
|---------|------------|------------|------------|
| ABN100c | RTB1-102 | RTB1-103 | RTB1-104 |
| ABH125c | RTB2-102 | RTB2-103 | RTB2-104 |
| ABH250c | RTB3-202 | RTB3-203 | RTB3-204 |

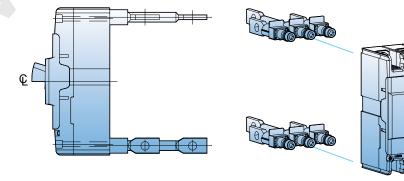

Mechanical interlock

The mechanical interlock is installed on the front of two breakers mounted side by side, in either the 3-pole or 4-pole version and prevents simultaneous closing of the two breakers. So it is suitable for consisting of manual sourcechangeover system.

Type numbering system

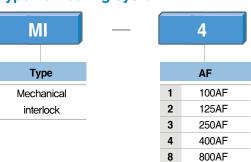


| | 3 | | |
|---|----|----|--|
| | Po | le | |
| 3 | | 3P | |
| 4 | | 4P | |

Types and applicable breakers


| Туре | МССВ | ELCB |
|-----------|--|---|
| MI-13, 14 | ABS30c, ABS50c, ABS60c, ABN50c, ABN60c, ABN100c, ABN100e | EBS30c, EBS50c, EBS60c, EBN50c, EBN60c, EBN100c |
| MI-23, 24 | ABS125c, ABH50c, ABH125c, ABL125c | EBS125c, EBH50c, EBH125c |
| MI-33, 34 | ABN/S/H/L250c | EBN/S/H250c |
| MI-43, 44 | ABN/S/H/L400c | EBN/S/H/L400c |
| MI-83, 84 | ABN/S/L800c | EBN/S/L800c |


Note) MI is not applicable to 2-pole version breakers of 100AF and 125AF.




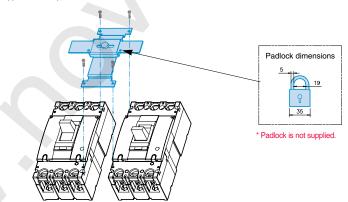

MCCB panel cutting







MCCB panel drilling

(Unit in: mm)

| Cutting | MI-1 | 3, 14 | MI-2 | 3, 24 | MI-3 | 3, 34 | MI-4 | 3, 44 | MI-8 | 3, 84 |
|---------|------|-------|------|-------|------|-------|------|-------|------|-------|
| | Α | В | Α | В | Α | В | Α | В | Α | В |
| Narrow | 52 | 66 | 52 | 66 | 52 | 66 | 100 | 111 | 100 | 111 |
| Wide | 86 | 62 | 102 | 62 | 104 | 62 | 152 | 97 | 152 | 97 |

(Unit in: mm)

| Breaker | С | | |) | E | | |
|---------|----|----|-------|-------|-----|-----|--|
| Dieakei | 3P | 4P | 3P | 4P | 3P | 4P | |
| 100AF | 25 | 25 | 110.5 | 110.5 | 70 | 95 | |
| 125AF | 30 | 30 | 132 | 132 | 84 | 114 | |
| 250AF | 35 | 35 | 126 | 126 | 99 | 134 | |
| 400AF | 44 | 44 | 215 | 215 | 166 | 210 | |
| 800AF | 70 | 70 | 243 | 243 | 210 | 280 | |



Plug-in base

Plug-in devices

Plug-in device makes it possible to extract and/or rapidly replace the circuit breaker without having to touch connections for ship and important installations.

The plug-in base is the fixed part of the plug-in version of the circuit-breaker.

It will be installed directly on the back plate of panel.

The circuit-breaker is racked out by unscrewing the top and bottom fixing screws.

Normal type plug-in MCCB

- MCCB current rating upto 250A
- Generally used in switchgears

Double-row type plug-in MCCB

- For 125AF MCCB
- Generally used in branch circuits

Type names of blocks



Plug-in type MCCB (Plug-in terminal built)





ABH103c plug-in type

| Breaker | Arrangement | Plug-in block | Remark |
|----------|------------------|--------------------|--------|
| | Normal | PB-A3-FR | |
| ABN100c | Single-row | PB-A3-1DB | |
| ADIVIOUC | Double-row | PB-A3-2DB | |
| | Line-only | PB-A3-FRL | |
| | Normal | PB-C3-FR | |
| ABH125c | Single-row | PB-C3-1DB | |
| ADD 1200 | Double-row | PB-C3-2DB | |
| | Line-only | PB-C3-FRL | |
| ABH250c | Normal | PB-D3-FR | |
| 400AF | Normal/Line-only | PB-I3-FR/PB-I3-FRL | |
| 800AF | Normal | PB-J3-FR | |



ABH203c plug-in type



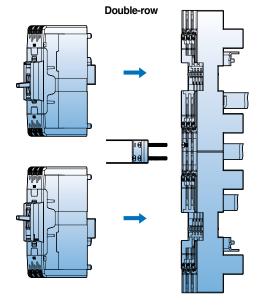

Remote operation




Motor operator

Motor operators can also be operated by manual. The motor drives a mechanism which switches Metasol toggle handle to the "On" and "Off/Reset" positions.

- The manual actuator handle is located on the front of the cover.
- Manual or Automatic operation can be selected.
- Applicable to 2, 3 and 4-pole breakers.


| мссв | | | Туре | Control voltage | Actuation current | Response time (ms) | | Mechanical service life | No. of operations |
|---|--|--|--------|---|---------------------------|--------------------|---------|-------------------------|-------------------|
| 2P | 3P | 4P | | | (A) | Closing | Opening | (operations) | per hour |
| - | ABN53c, ABN63c, ABN103c, ABN103e, ABS33c, ABS53c, ABS63c | ABN54c, ABN64c, ABN104c, ABN104e, ABS34c, ABS54c, ABS64c | MOP-M1 | ① DC24V ② AC110V~DC110V ③ AC230V/DC220V | ≤3A (DC24V) ≤0.5A (AC) | 700 | 700 | 10,000 | 120 |
| - | ABS103c, ABH53c, ABH103c ABL103c | ABS104c, ABH54c, ABH104c ABL104c | MOP-M2 | ① DC24V ② AC110V~DC110V ③ AC230V/DC220V | ≤3A (DC24V) ≤0.5A (AC) | 840 | 840 | 10,000 | 120 |
| ABN202c, ABS202c, ABH202c ABL202c | ABN203c, ABS203c, ABH203c ABL203c | ABN204c, ABS204c, ABH204c ABL204c | MOP-M3 | ① DC24V ② AC110V~DC110V ③ AC230V/DC220V | ≤3A (DC24V) ≤0.5A (AC) | 840 | 840 | 10,000 | 120 |
| ABN402c, ABS402c, ABH402c, ABL402c | ABN403c, ABS403c, ABH403c, ABL403c | ABN404c, ABS404c, ABH404c, ABL404c | MOP-M4 | ① DC24V ② AC110~DC110V ③ AC230V/DC220V | ≤6A (DC24V) ≤0.8A (AC) | 1,200 | 1,200 | 4,000 | 60 |
| ABN802c, ABS802c, ABL802c | ABN803c,, ABS803c,, ABL803c | ABN804c, ABS804c, ABL804c | MOP-M5 | ① DC24V ② AC110~DC110V ③ AC230V/DC220V | ≤6A (DC24V) ≤0.8A (AC) | 1,200 | 1,200 | 2,500 | 60 |
| | ABS1003b, ABS1203b ABL1003b, ABL1203b | ABS1204b | MOP-M6 | ① AC230V/DC220V | ≤6A (DC24V) ≤0.8A (AC) | 1,500 | 1,500 | 2,500 | 20 |

Wiring connection




Standard connection

- 1) Remote On and Off of MCCB and manual operation
- 2) Be careful not to change the polarity at DC24V



Connection with alarm switch (AL)

- 1) The connection diagram is the method of using a alarm switch (AL) without shunt or undervoltage trip. A trip due to a fault or trip button prevent a remote reset.
- 2) The fault must be cleared surely and reset it with manual operation.



Remote operation

Manual handle

Manual operation

- 1) Insert the manual handle into the slot of Motor operator surface and rotate it clockwise.
- 2) It must be rotated just 180° clockwise for safe operation of micro switch in the motor operator.
- 3) Return the manual handle after the manual operation
- 4) Turn the slide switch back to the position of Auto.

CAUTION: When the circuit breaker is tripped by trip button in the Off status,

it is impossible to operate motor operator automatically It must be reset by manual operation.


Automatic operation

- 1) Set the slide switch to Auto, then internal power is closed automatically.
- 2) Operating frequency should be less than these below regulated values. MOP-M1~M3, M7 (120 operations per hour) , MOP-M4 (60 operations per hour) , MOP-M5, M6 (20 operations per hour)
- 3) Use the On/Off switch in the range of regulated values.
- 4) It may interfere near communication equipments because of internal switching power supply. It's recommended that a noise filter be installed to power supply.
- 5) Please do not input On/Off signals at the same time during the automatic operation.
- 6) If the circuit breaker has a UVT attached inside, charge a UVT on the rated voltage before performing Motor operator.

Motor operator


Feature


- 1) On position indication (Red color)
- 2 Trip position indication (White color)
- ③ Off position indication (Green color)
- 4 Button for push to trip
- ⑤ On/Off/Reset selection lever
- 6 Manual/Auto selection lever

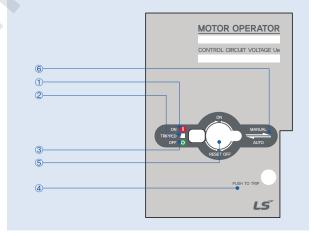

MOP-M4/M5/M6





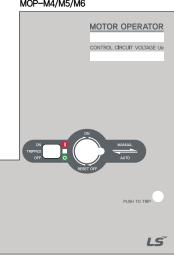


Characteristics curves

Breaker types


МССВ

ABE30b

Compensation curves



Rated current: 3~30A (ABE)

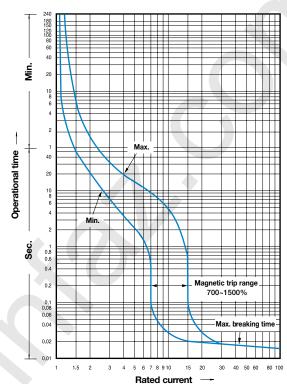

Breaker types

MCCB


ABN50c/60c/100c/100e ABS30c/50c/60c

ELCB


EBN50c/60c/100c

EBS30c/50c/60c


Compensation curves



Rated current: 3~30A (ABN/S,EBN/S)

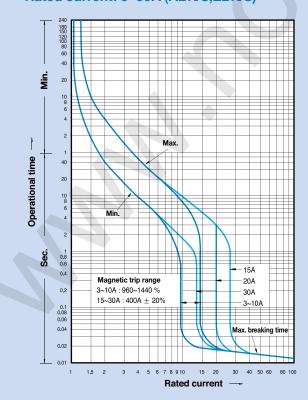

Rated current: 40~100A (ABN/S,EBN/S)

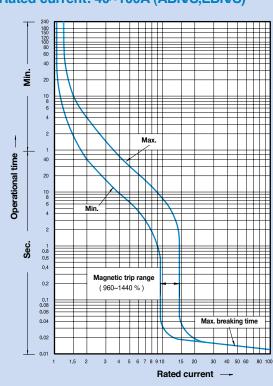



Characteristics curves

Breaker types


| MCCB | | | | | | |
|-------------|--|--|--|--|--|--|
| ABS125c | | | | | | |
| ABH50c/125c | | | | | | |
| ABL125c | | | | | | |
| ELCB | | | | | | |
| EBS125c | | | | | | |
| EBH50c/125c | | | | | | |

Compensation curves






Rated current: 15~30A, 40~100A

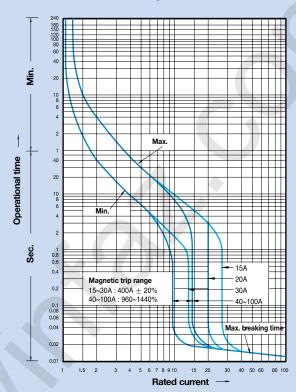

Rated current: 125A

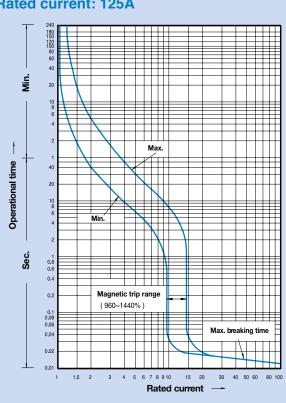

Breaker types

MCCB

ABN250c, ABS250c


ABH250c, ABL250c


ELCB

EBN250c, EBS250c


EBH250c

Compensation curves






Rated current: 100~225A

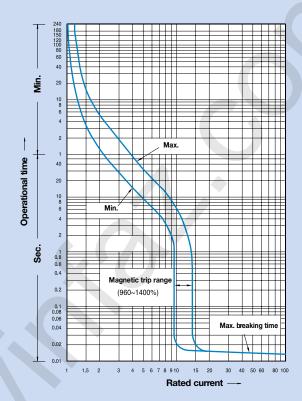

Rated current: 250A

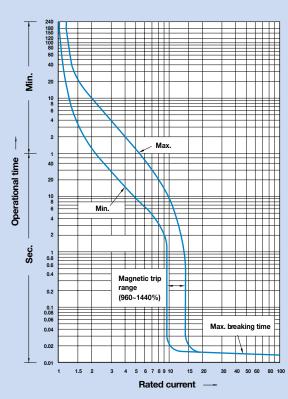

Characteristics curves

Breaker types


МССВ


ABN400c, ABS400c, ABH400c, ABL400c ABN800c, ABS800c, ABL800c

ELCB


EBN400c, EBS400c, EBH400c, EBL400c EBN800c, EBS800c, EBL800c

Compensation curves






Rated current: 250~400A

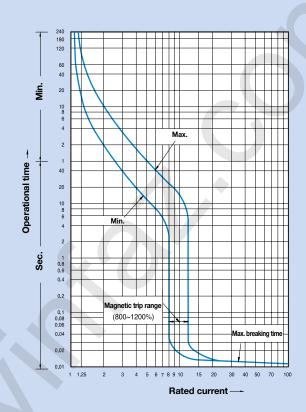

Rated current: 500~800A

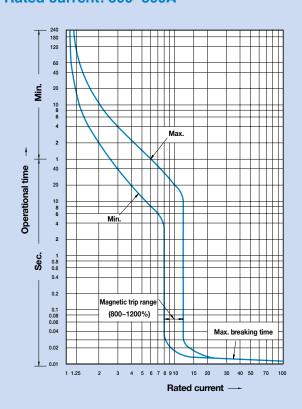

Breaker types

МССВ


ABS1000b, ABL1000b

ABS1200b, ABL1200b

ELCB

EBS1003b, EBS1203b

Compensation curves




Breaker types


МССВ

ABS1200bE

Rated current: 1000~1200A

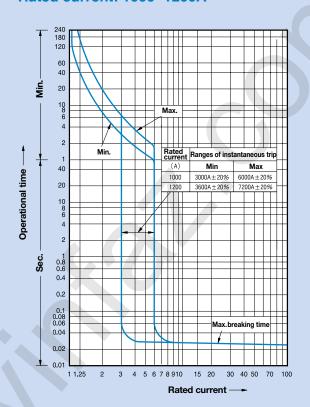

Rated current: 1200A

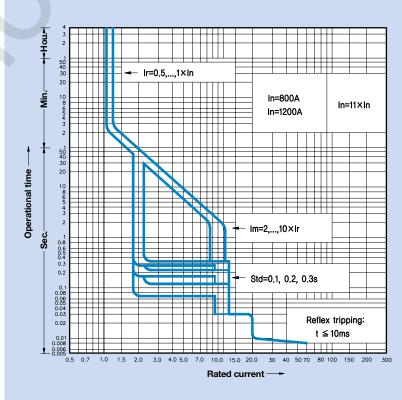

Characteristics curves (ELCB Adjustable)


Breaker types

ELCB

EBN 50c/60c/100c/250c

EBS 30c/50c/60c/125c/250c

EBH 50c/125c/250c

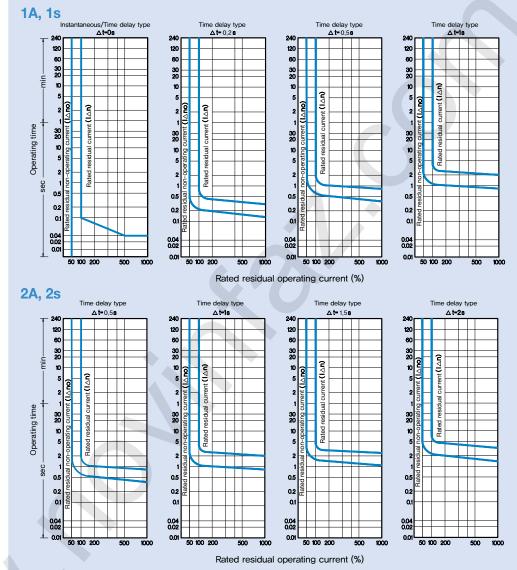


Breaker types

ELCB

EBN400c, EBS400c, EBH400c, EBL400c

EBN800c, EBS800c, EBL800c

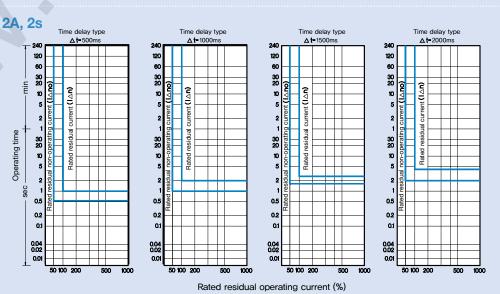



Characteristics curves Motor protection type

Breaker types


MCCB
ABN50cM/60cM/100cM/100dM
ABS30cM/50cM/60cM

Compensation curves






Rated current: 16~32A

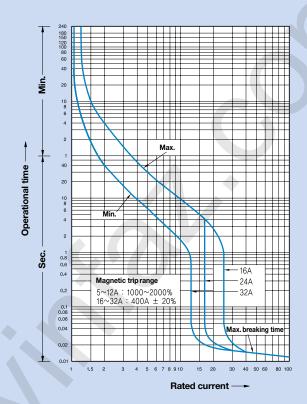

Rated current: 45~90A

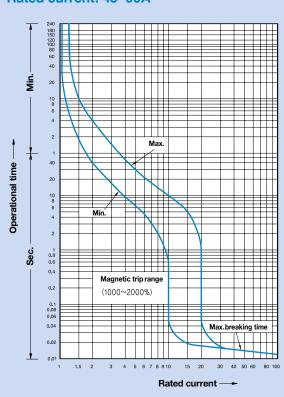


Characteristics curves Motor protection type

Breaker types

MCCB
ABS125cM
ABH50cM/125cM


Compensation curves




Breaker types

MCCB
ABN250cM, ABS250cM
ABH250cM


Compensation curves




Rated current: 16~90A

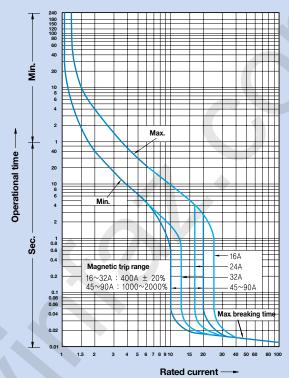


Rated current: 125~225A

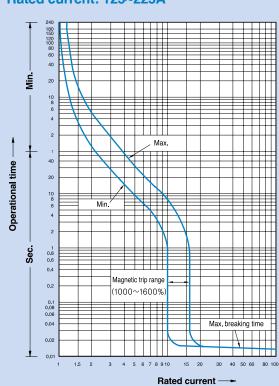


MCCB ABE30b

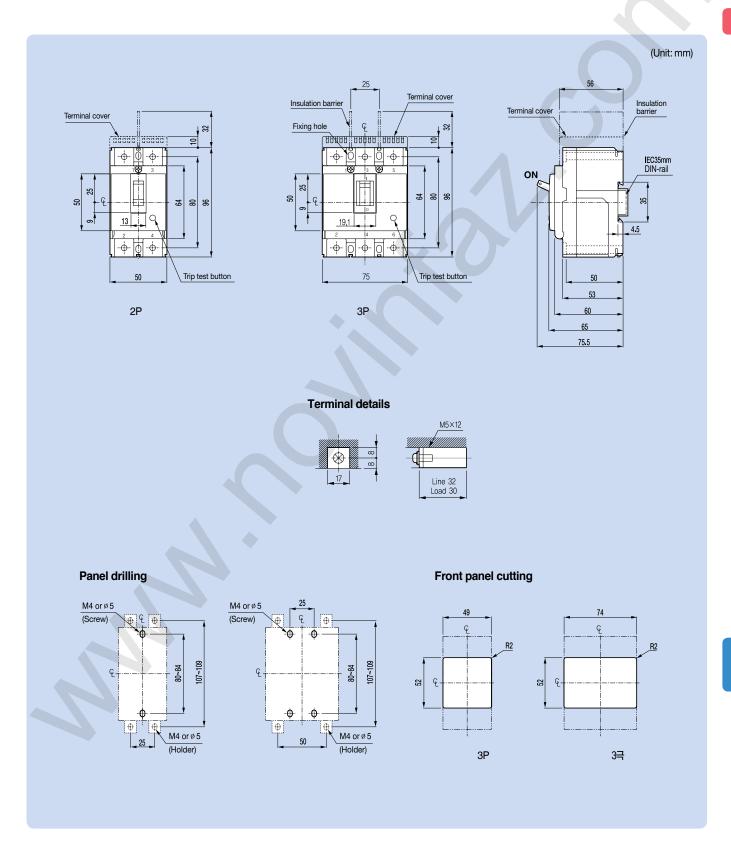

MCCB



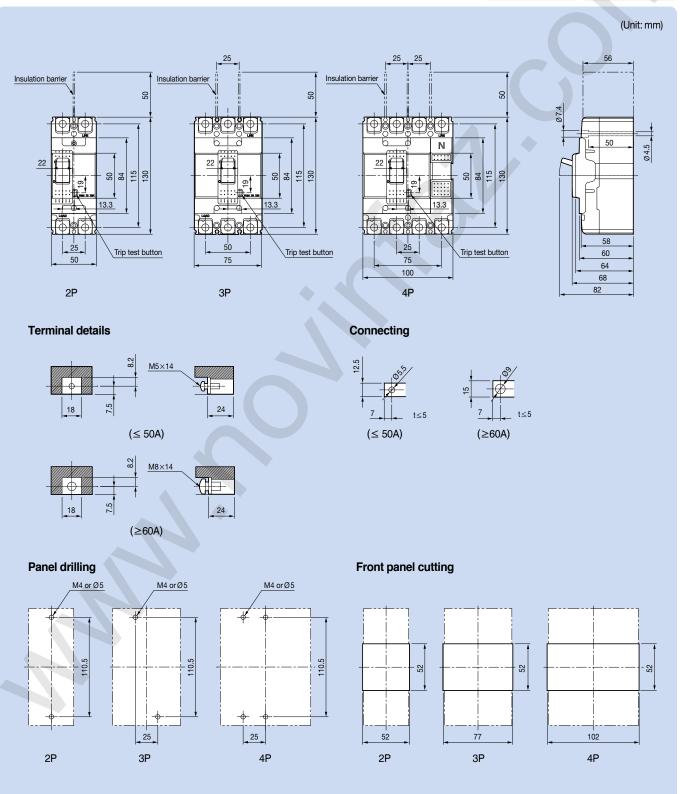

Insulation barrier

Insulation barrier

132

30

3Р


2P

Insulation barrier

(Unit: mm)

9

52

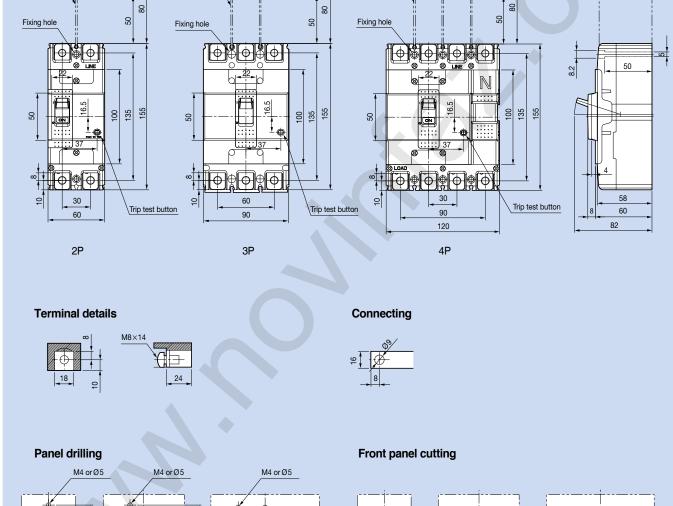

132

4P

52

62

2P

52


92

3Р

122

4P

MCCB (Unit: mm) Insulation barrier Insulation barrier 80 Fixing hole Fixing hole 126 102 126 144 165 165 59.4 59.4 Q-Trip test button Trip test button 64 70 68.5 105 86.85 2,3P 4P Connecting **Terminal details** M8×20 28 **Panel drilling** Front panel cutting M4 or Ø5 M4 or Ø5 126 F Œ 126 22 22 35 107 142 2,3P 4P 2,3P 4P

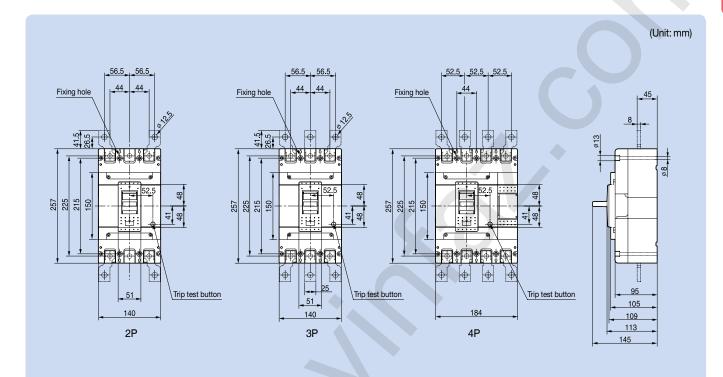


Terminal details





Connecting



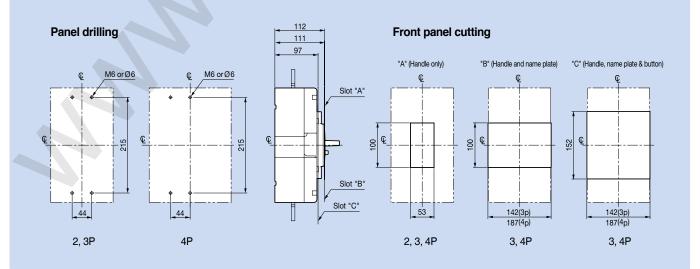


MCCB

ABN800c


ABS800c

ABL800c

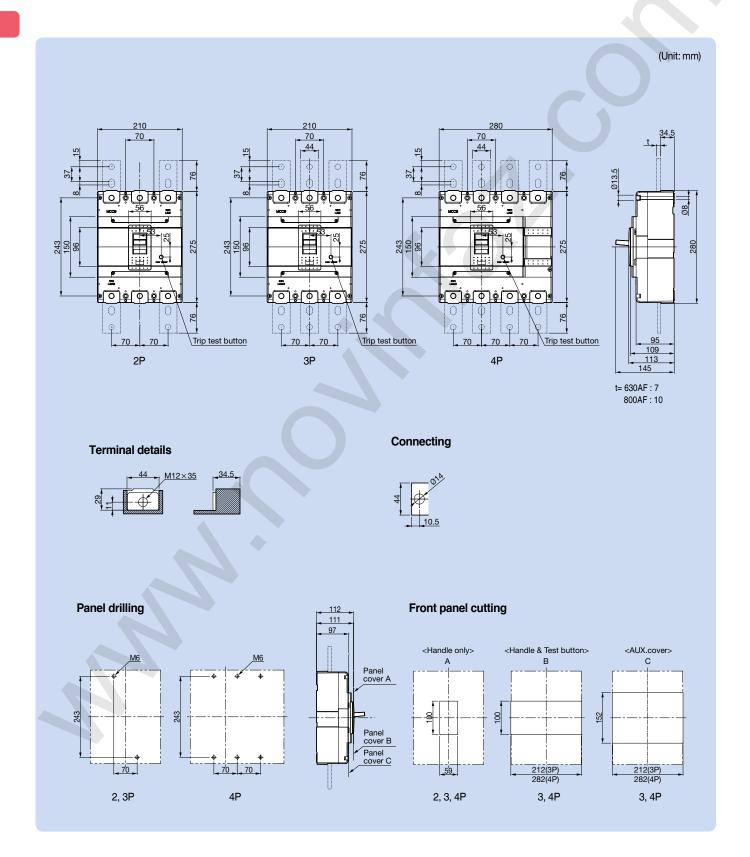


MCCB

ABS1000b ABL1000b

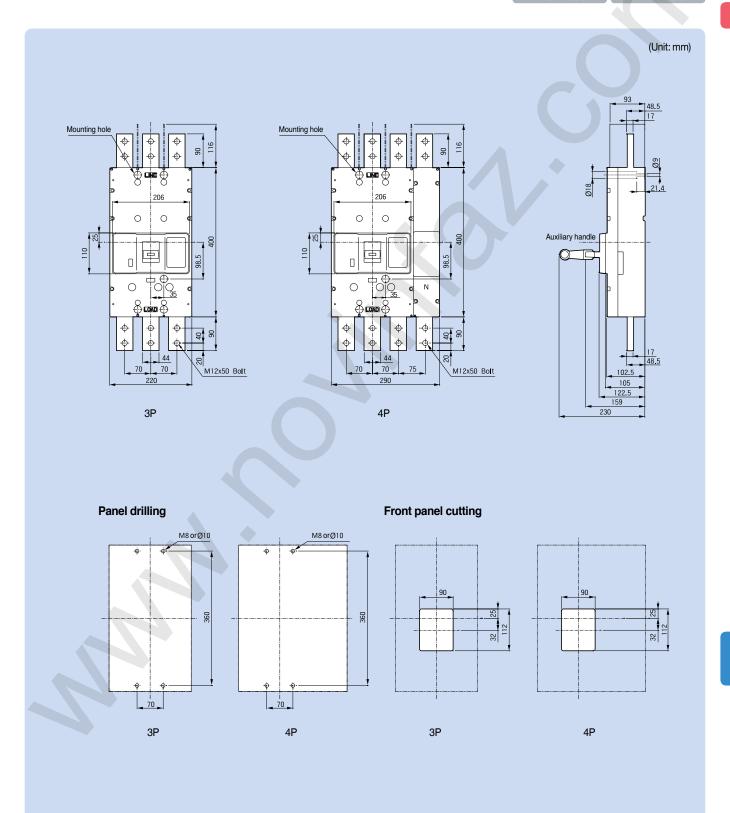


MCCB ABS1203bB

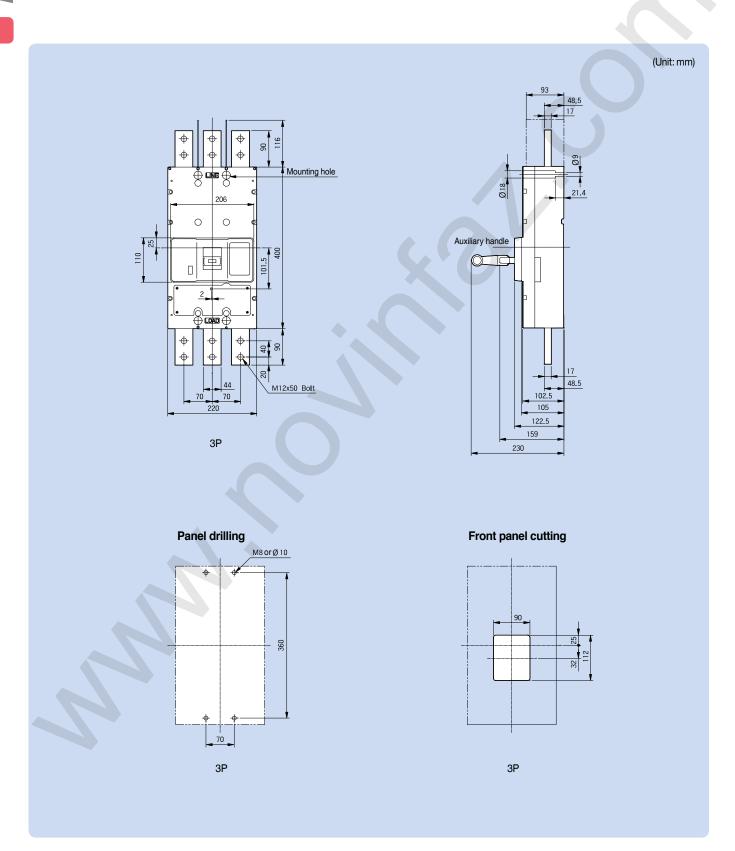

ELCB




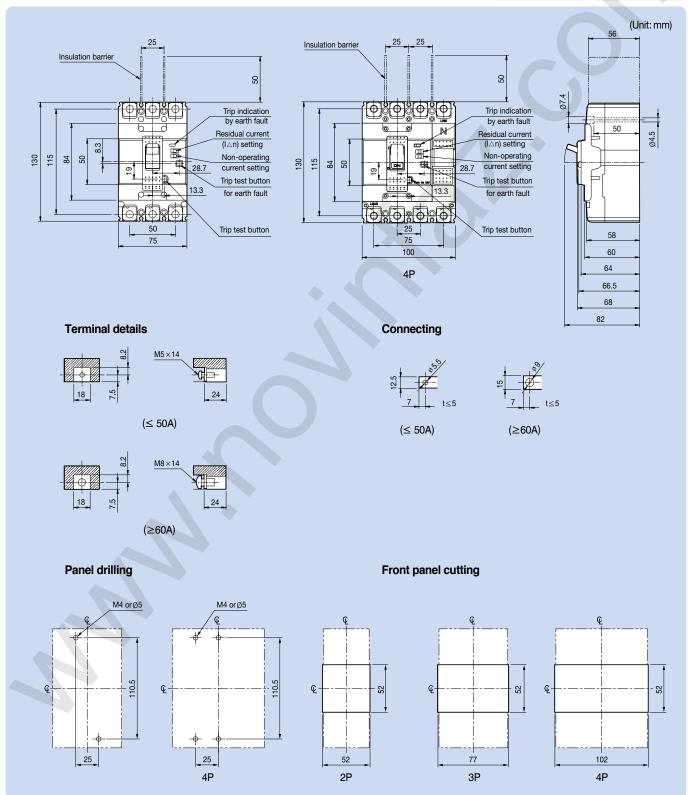


ELCB

EBS125c

EBH125c

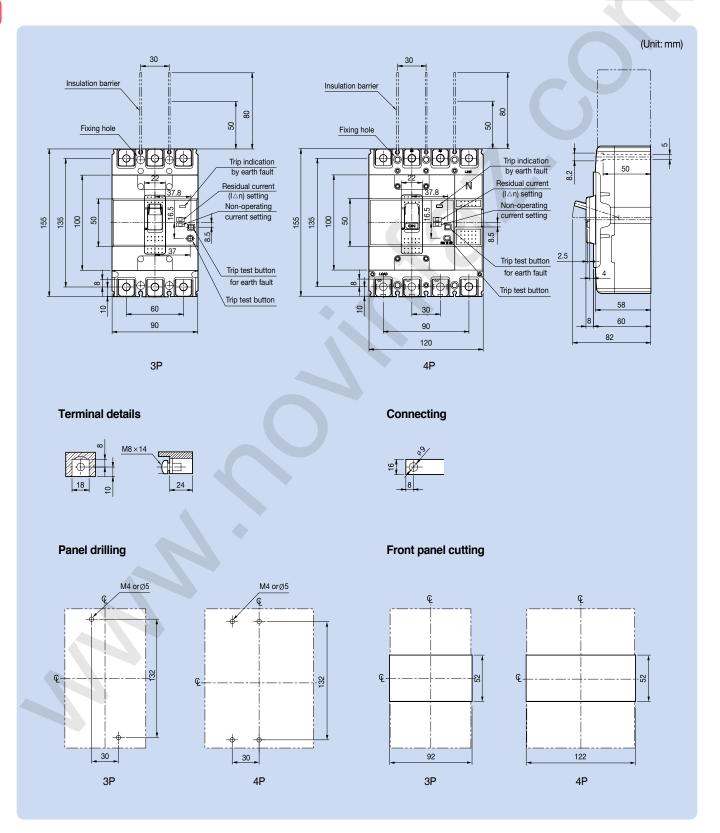

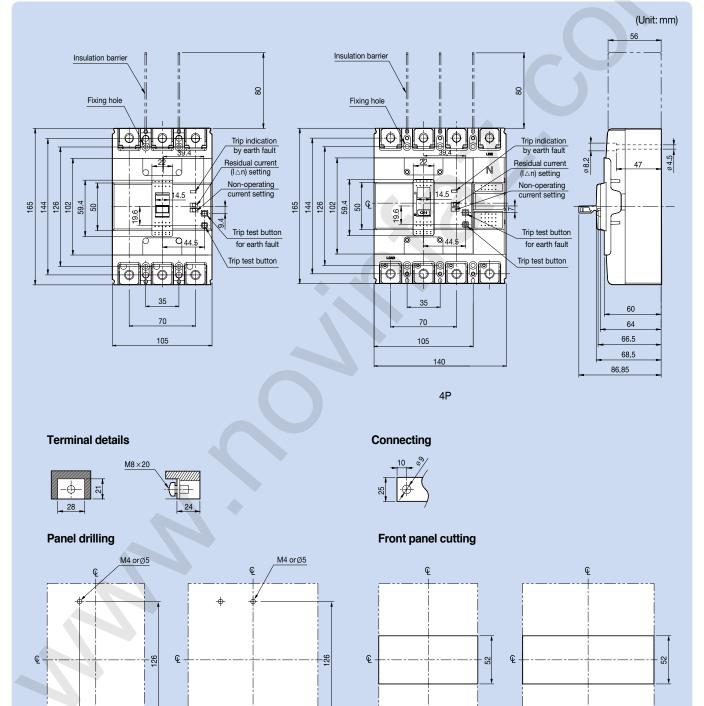

107

ELCB

35

35


4P

142

4P

9

ELCB (Instantaneous type)

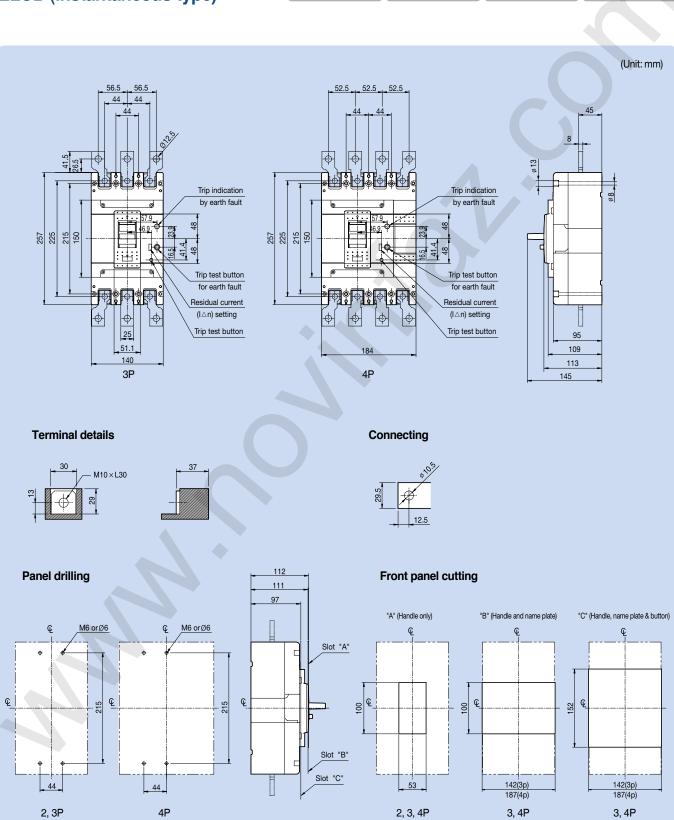


ELCB (Time delay type)


EBN400c


EBS400c

EBH400c


EBL400c

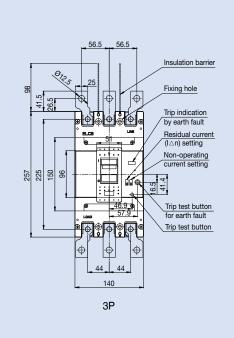

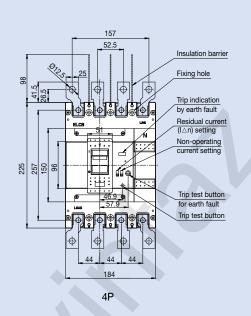

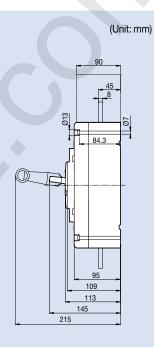


Terminal details




Connecting




Panel drilling






Front panel cutting

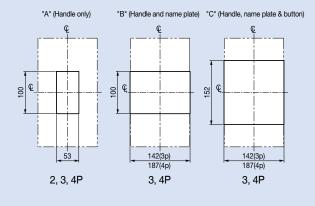

ELCB (Instantaneous type)

(Unit: mm) -0 Earthleakage trip indicator Trip test button - earthleakage 243 150 96 Residual current selector Trip test button - mechanical 109 109 3Р 630AF 800AF **Terminal details** Connecting Panel drilling Front panel cutting 111 (Handle only) (AUX. cover) 100 152 212 212 70 59 3P

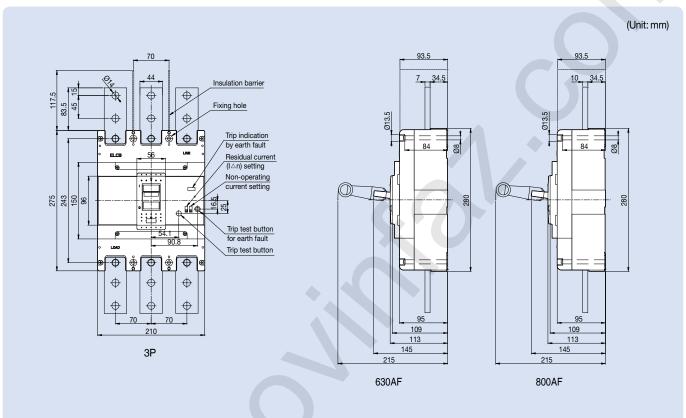

Terminal details


ELCB (Time delay type)

M12×L35


Connecting



Panel drilling




Front panel cutting

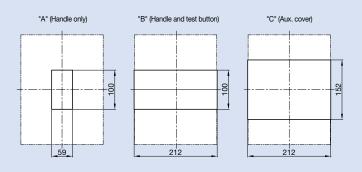

9


ELCB

EBS1000b EBS1200b

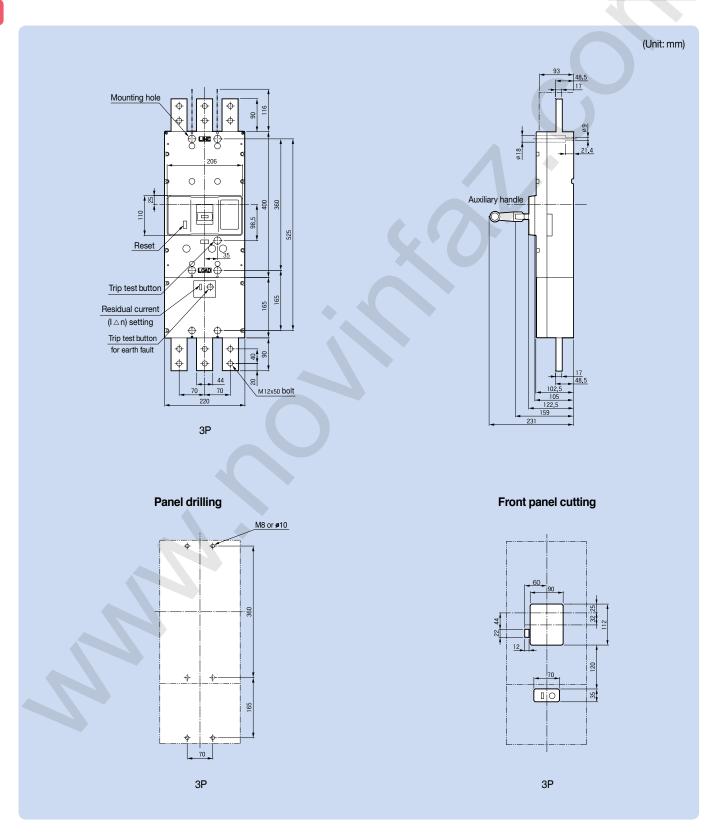


Rear connection terminals

Bar type

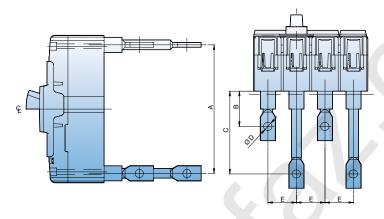

| MCCB | A | В | С | D | E |
|---------|-----|------|------|------|----|
| ABN100c | 115 | 37 | 87 | Ø8.5 | 25 |
| ABH125c | 135 | 37 | 87 | Ø8.5 | 30 |
| ABH250c | 144 | 57.5 | 93.5 | Ø8.5 | 35 |


Round type

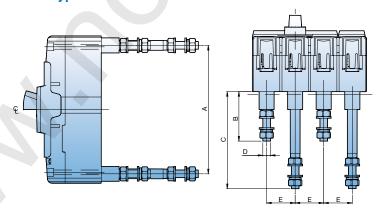


| МССВ | A | В | С | D | E |
|---------------|-----|----|-----|----|----|
| ABN100c 50AF | 115 | 42 | 92 | M6 | 25 |
| ABN100c 100AF | 115 | 52 | 102 | M8 | 25 |
| ABH125c | 135 | 52 | 102 | M8 | 30 |
| ABH250c | 144 | 70 | 106 | M8 | 35 |

Rotary handles


Direct mounting type (D-handle, 30~250AF)







| Туре | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | Remarks |
|-------|--------|--------|--------|--------|--------|---------|
| DH100 | 110.5 | 78 | 90 | 92 | 103.4 | 100AF |
| DH125 | 132 | 94 | 105 | 108 | 120 | 125AF |
| DH250 | 126 | 108 | 121 | 110 | 122 | 250AF |

Direct mounting type (N-handle, 30~250AF)









| N-handle | N-30c | N-40c | N-50c |
|----------|-------|-------|-------|
| Note | 100AF | 125AF | 250AF |
| A (mm) | 103 | 103 | 103 |


Direct mounting type (N-handle, 400~800AF)






Rotary handles


Extended mounting type (E-handle) (30~250AF)

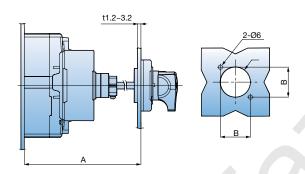

| Туре | A (mm) | B (mm) | C (mm) | Remarks |
|-------|----------------------------------|--------|--------|---------|
| EH100 | min 150, max 573.5 (Shaft 469mm) | 47 | Ø53 | 100AF |
| EH125 | min 150, max 573.5 (Shaft 469mm) | 47 | Ø53 | 125AF |
| EH250 | min 150, max 571.5 (Shaft 469mm) | 47 | Ø53 | 250AF |


Extended mounting type (E-handle, 400~800AF)

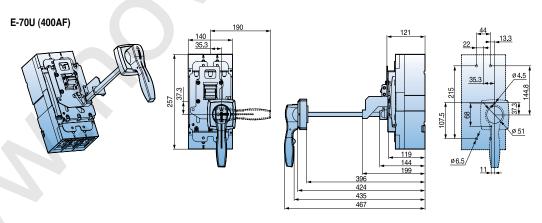

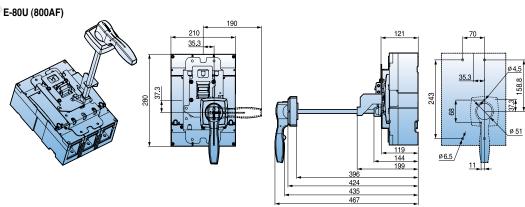


Plug-in MCCB (ABN100c)

Normal type (PB-A3-FR)

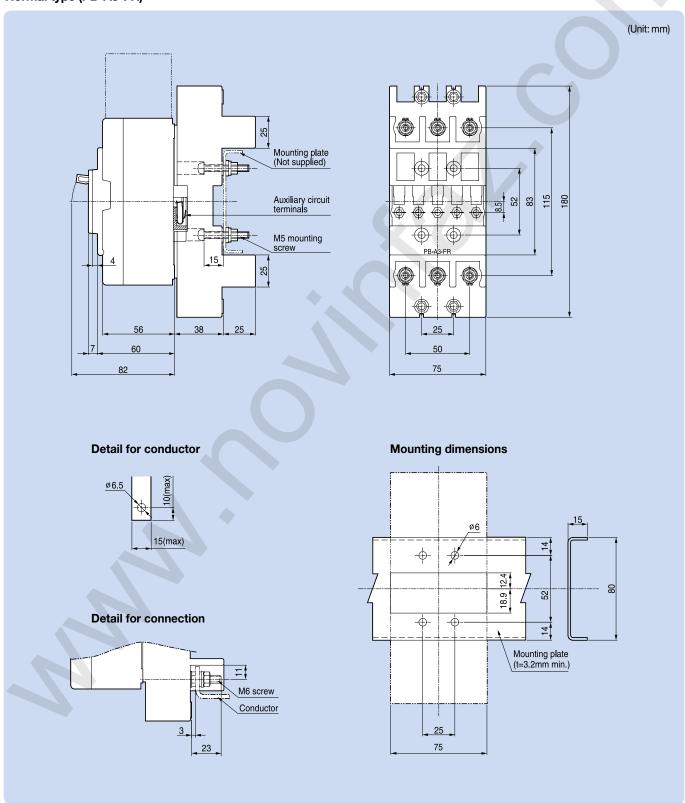


Plug-in MCCB (ABN100c)

Single-row type (PB-A3-1DB)

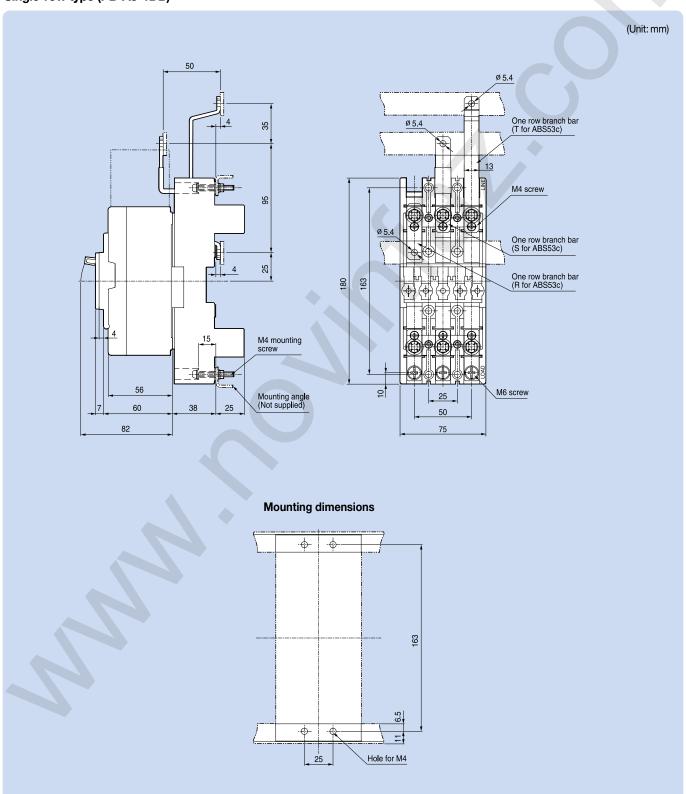


Plug-in MCCB (ABN100c)

Double-row type (PB-A3-2DB)

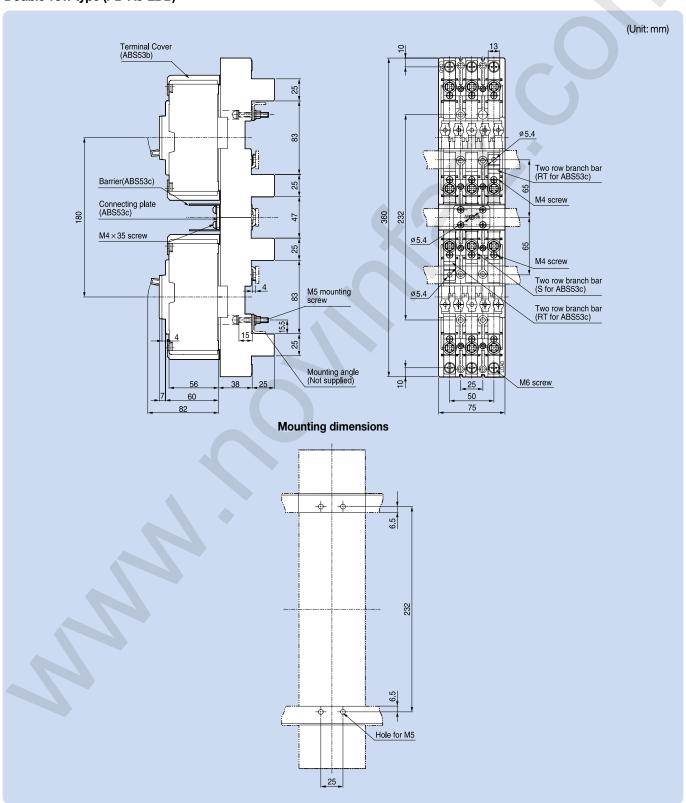


Plug-in MCCB (ABN100c)

Line-only type (PB-A3-FRL)

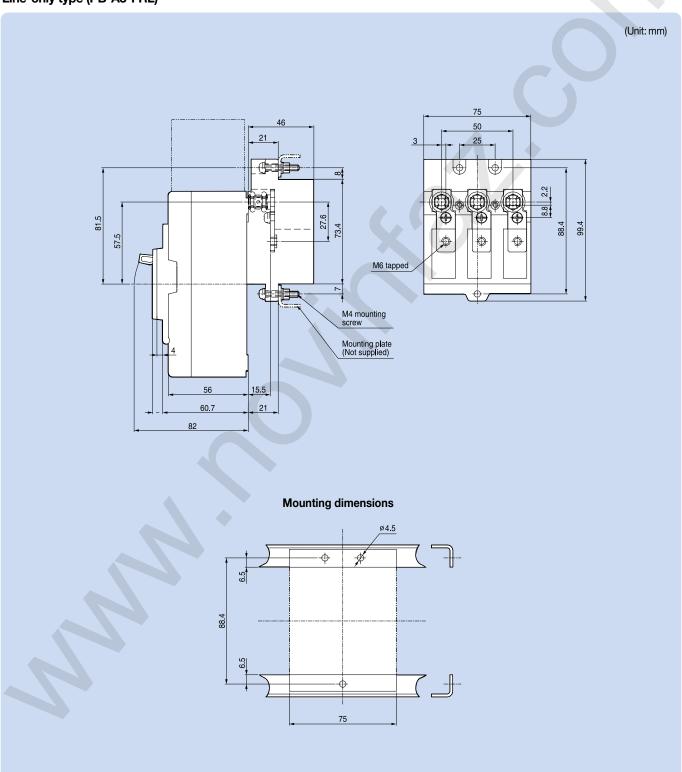


Plug-in MCCB (ABH125c)

Normal type (PB-C3-FR)

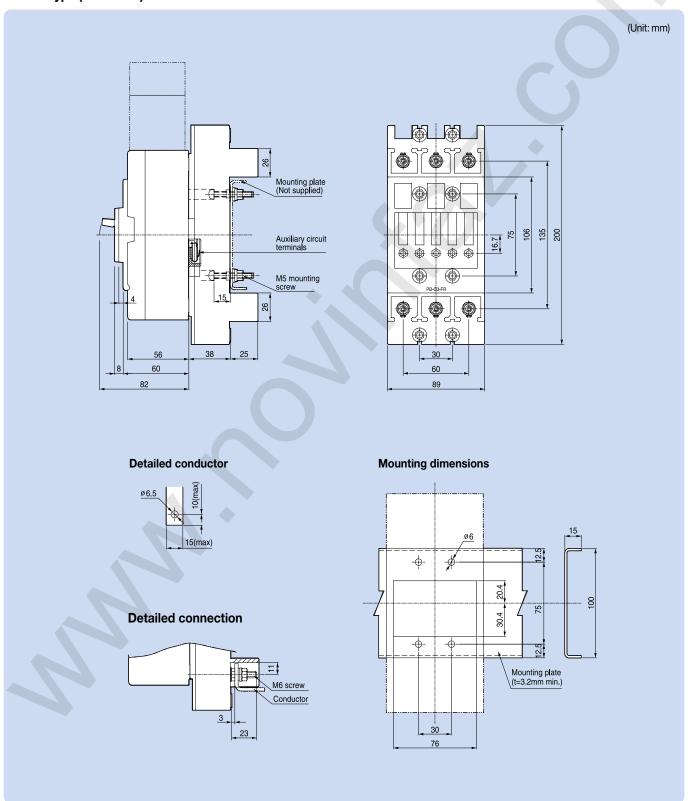


Plug-in MCCB (ABH125c)

Single-row type (PB-C3-1DB)

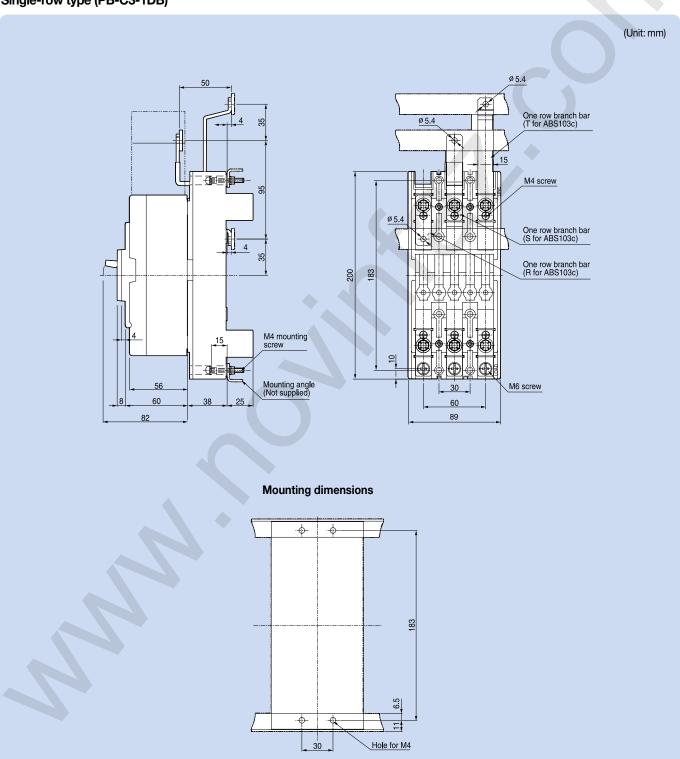


Plug-in MCCB (ABH125c)

Double-row type (PB-C3-2DB)

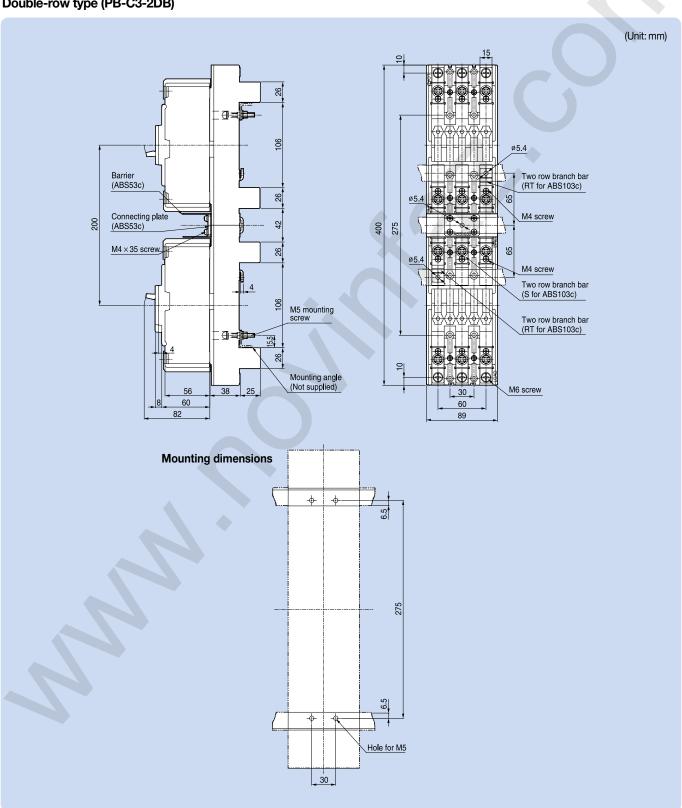


Plug-in MCCB (ABH125c)

Line-only type (PB-C3-FRL)

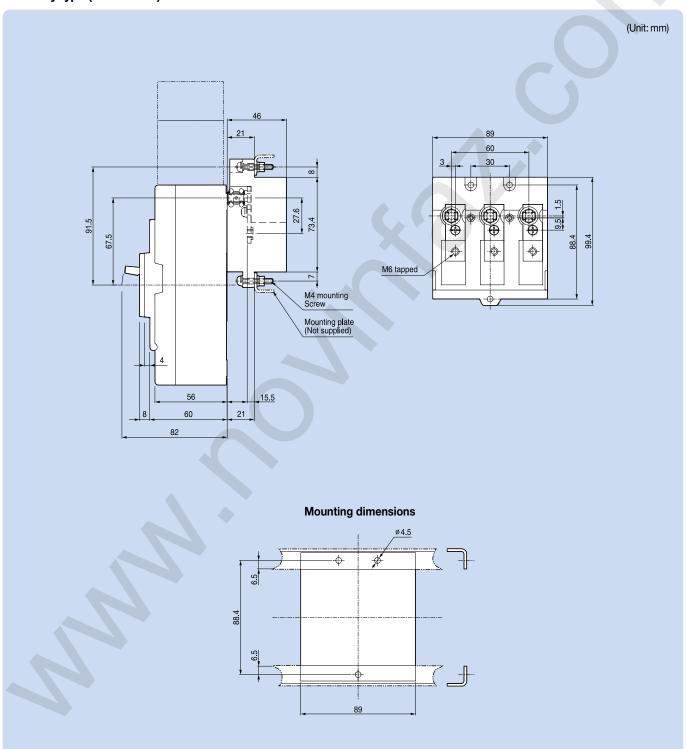


Plug-in MCCB (ABH250c, 400AF)

Normal type (PB-D3-FR/FRL)

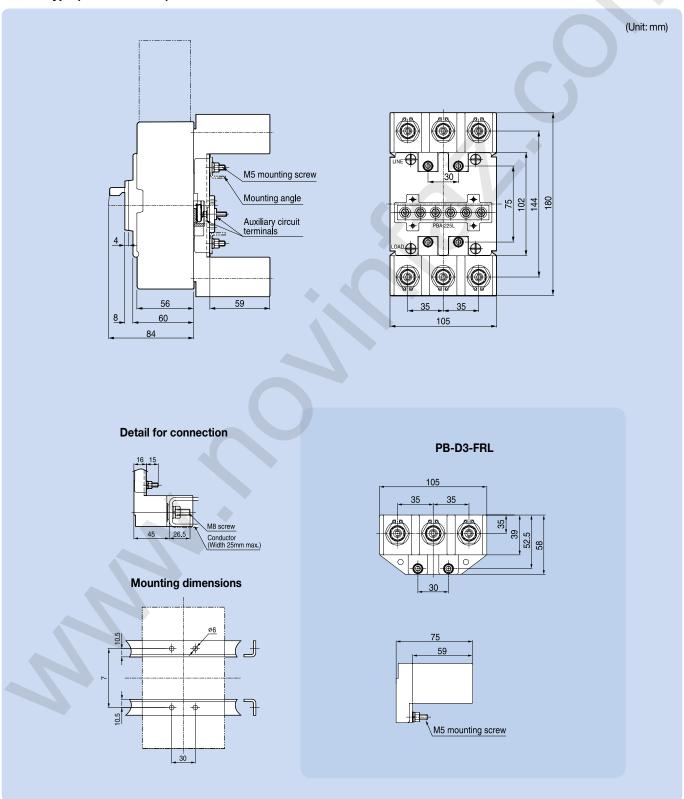


Plug-in MCCB (400AF)

Normal type (PB-I3-FR/FRL)

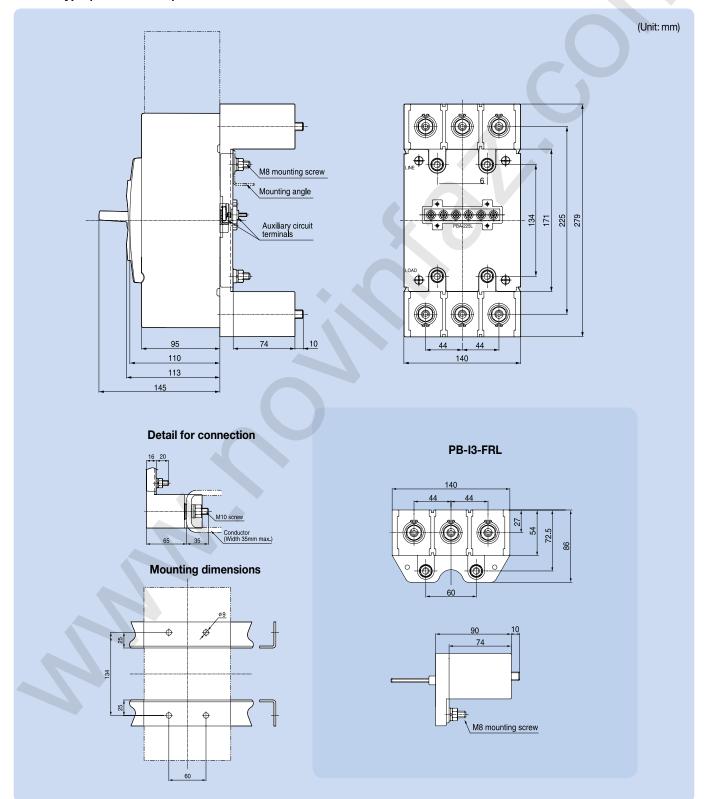



Plug-in MCCB (800AF)


Normal type (PB-J3-FR)

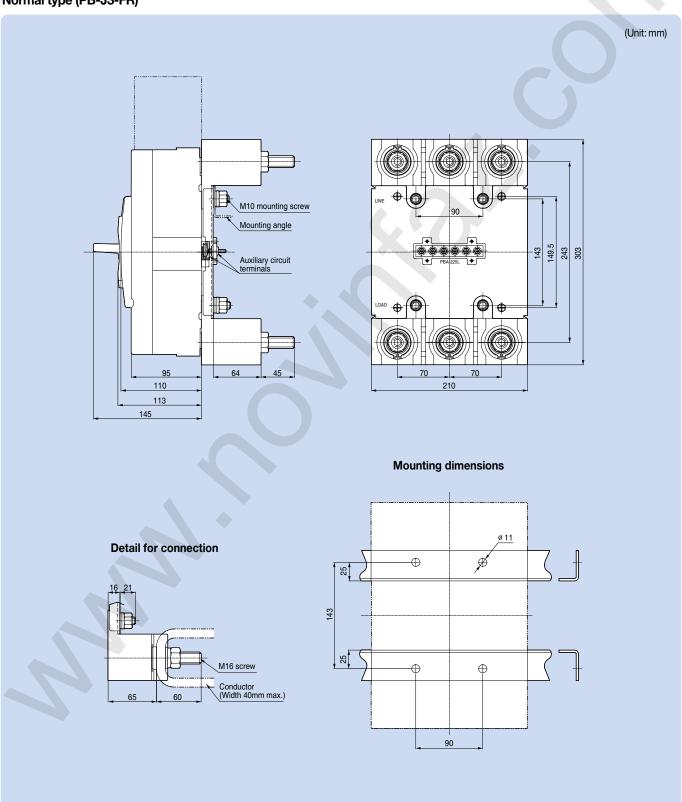

Remote operation







| | A1 | A2 | А3 | B1 | B2 | В3 | B4 | C1 | C2 |
|--------|-------|-----|------|-----|------|-----|------|-----|-----|
| MOP-M1 | 110.5 | 102 | 51 | 75 | 37.5 | 100 | 37.5 | 128 | 60 |
| MOP-M2 | 132 | 116 | 58 | 90 | 45 | 120 | 45 | 122 | 60 |
| MOP-M3 | 126 | 116 | 55 | 105 | 52.5 | 140 | 52.5 | 125 | 60 |
| MOP-M4 | 215 | 176 | 88 | 140 | 70 | 184 | 70 | 198 | 109 |
| MOP-M5 | 243 | 176 | 88 | 210 | 105 | 280 | 105 | 198 | 109 |
| MOP-M6 | 322.5 | 176 | 65.5 | 220 | 110 | 289 | 110 | 210 | 105 |

Technical information

Standard accessories

The following accessories for mounting, connection and insulation are standard items and are packed with Metasol series circuit breakers.

| Item | 100AF | 125AF | 250AF | 400AF | 800AF |
|-----------------------|---|---|---|--|--|
| Fixing screw | ₩ | ⊕ | | | |
| SCIEW | 2P: 2EA (M4×60) 3P: 2EA (M4×60) 4P: 4EA (M4×60) | 2P: 2EA (M4×60) 3P: 2EA (M4×60) 4P: 4EA (M4×60) | 2P: 2EA (M4×55) 3P: 2EA (M4×55) 4P: 4EA (M4×55) | 2P: 4EA (M6×100) 3P: 4EA (M6×100) 4P: 4EA (M6×100) | 2P: 4EA (M6×100) 3P: 4EA (M6×100) 4P: 4EA (M6×100) |
| | | | | | |
| Terminal bolt | 3~50A 2P: 4EA (M5×14) 3P: 6EA (M5×14) 4P: 8EA (M5×14) 60~100A 2P: 4EA (M8×14) 3P: 6EA (M8×14) 4P: 8EA (M8×14) | 2P: 4EA (M8×14) 3P: 6EA (M8×14) 4P: 8EA (M8×14) | 2P: 4EA (M8×20) 3P: 6EA (M8×20) 4P: 8EA (M8×20) | 2P: 4EA (M10×30) 3P: 6EA (M10×30) 4P: 8EA (M10×30) | 2P: 4EA (M12×35) 3P: 6EA (M12×35) 4P: 8EA (M12×35) |
| Insulation barrier | ⊕ 13 | (B-23 | (1) | (18 | ⟨1 |
| Dailiei | 2P: 1EA 3P: 2EA 4P: 3EA | 2P: 1EA 3P: 2EA 4P: 3EA | 2P: 1EA 3P: 2EA 4P: 3EA | 2P: 1EA 3P: 2EA 4P: 3EA | 2P: 1EA 3P: 2EA 4P: 3EA |

Fixing screws for rotary handles

| Handle type | N-30c | N-40c | N-50c | N-70 | N-80 |
|----------------------|--|---|--|--|----------------------------------|
| Applied MCCB | ABN 50c/60c/100c ABS 30c/50c/60c ABN100e | ABS 125c ABH 50c ABH 125c ABL 125c | ABN 250c ABS 250c ABH 250c ABL 250c | ABN 400c ABS 400c ABH 400c ABL 400c | ABN 800c ABS 800c ABL 800c |
| Applied ELCB | EBN 50c/60c/100c EBS 30c/50c/60c | EBS 125c EBH 50c EBH 125c | EBN 250c EBS 250c EBH 250c | EBN 400c EBS 400c EBH 400c EBL 400c | EBN 800c EBS 800c EBL 800c |
| Fixing screw (short) | - | - | - | M6×16 | M6×16 |
| Fixing screw (long) | M4×85 | M4×85 | M4×85 | M6×110 | M6×110 |


| Handle type | DH/EH100 | DH/EH125 | DH/EH250 |
|--------------|----------|----------|----------|
| Fixing screw | M4×70 | M4×70 | M4×70 |

Connection

| МССВ | Terminal (mm) | Tightening torque (kgf · cm) | Conductor (mm) |
|-------|---------------------------------|---------------------------------|-------------------------------|
| 100AF | [3~50A] N5x 14 18 18 19 24 | M5: 23 ~ 28 M8: 55 ~ 75 | [3~50A] 0 5.5 11.5 7 11.5 |
| | [60~100A] NBx 14 18 19 24 | | [60~100A] |
| 125AF | M8x 14 18 24 | M8: 55 ~ 75 | 09 09 18 |
| 250AF | M8x 20 28 24 | M8: 80 ~ 130 | 09 09 25 |

Technical Information

Connection

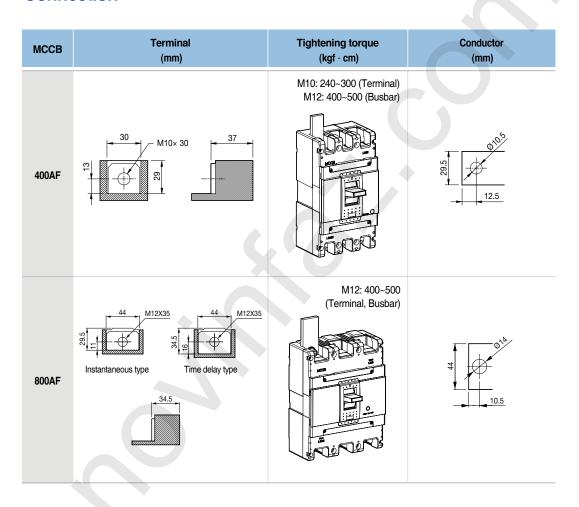

Aux cover screw connection

| Model | Tightening torque (kgf · cm) | Screw position |
|---|------------------------------|----------------|
| 30AF 50AF 60AF 100AF 125AF 250AF | 15 | |
| 400AF 630AF 800AF | 21 | |


Safety clearance

When installing a circuit breaker, safety clearances must be kept between the breaker and panels, bars and other protection devices installed nearby. These safety clearances are depend on the ultimate breaking capacity and are defined by tests carried out in accordance with standard IEC 60947-2.

When a short circuit interruption occur, high temperatures pressures are present in and above the arc chambers of the circuit-breaker. In order to allow the pressure to be distributed and to prevent fire and arcing or short-circuit currents, safety clearances are required.

A: Minimum distance to metallic top panels

| Frame | | A (r | nm) |
|-------|-------------|------|------|
| size | Description | 460V | 250V |
| | ABN50c | 40 | 25 |
| | ABN60c | 40 | 25 |
| | ABN100c | 50 | 30 |
| 100AF | ABN100e | 50 | 30 |
| | ABS30c | 30 | 25 |
| | ABS50c | 40 | 30 |
| | ABS60c | 40 | 30 |
| | ABS125c | 50 | 40 |
| 125AF | ABH50c | 50 | 40 |
| IZOAF | ABH125c | 100 | 80 |
| | ABL125c | 100 | 80 |
| | ABN250c | 100 | 80 |
| 250AF | ABS250c | 100 | 80 |
| ZOUAF | ABH250c | 100 | 80 |
| | ABL250c | 100 | 80 |
| | ABN400c | 100 | 80 |
| 400AF | ABS400c | 100 | 80 |
| 400AF | ABH400c | 100 | 80 |
| | ABL400c | 100 | 80 |
| | ABN800c | 120 | 80 |
| 800AF | ABS800c | 120 | 80 |
| | ABL800c | 120 | 80 |

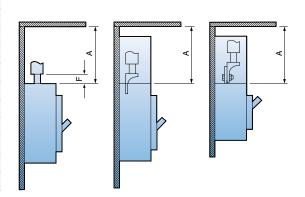


Safety clearance

B: Minimum distance between the lower and the upper breakers

- C1: Minimum distance between the lower breaker and the bare terminal of the upper breaker
- C: C1+ the dimension of bare part of conductor


| Frame | Description | C1 (| mm) | С |
|-------|-------------|------|------|-----------------------------------|
| size | Description | 460V | 250V | (mm) |
| | ABN50c | 40 | 25 | |
| | ABN60c | 40 | 25 | |
| | ABN100c | 50 | 30 | |
| 100AF | ABN100e | 50 | 30 | |
| | ABS30c | 30 | 25 | |
| | ABS50c | 40 | 30 | |
| | ABS60c | 40 | 30 | 5 |
| | ABS125c | 50 | 40 | The dimension of bare conduct + C |
| 125AF | ABH50c | 50 | 40 | ondt |
| IZSAF | ABH125c | 100 | 80 | ē c |
| | ABL125c | 100 | 80 | of ba |
| | ABN250c | 100 | 80 | <u>o</u> |
| 250AF | ABS250c | 100 | 80 | ens |
| ZOUAF | ABH250c | 100 | 80 | dir |
| | ABL250c | 100 | 80 | 且 |
| | ABN400c | 100 | 80 | |
| 400AF | ABS400c | 100 | 80 | |
| 400AF | ABH400c | 100 | 80 | |
| | ABL400c | 100 | 80 | |
| | ABN800c | 100 | 80 | |
| 800AF | ABS800c | 100 | 80 | |
| | ABL800c | 100 | 80 | |

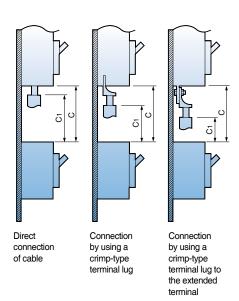

Insulated length of main terminal of circuit breaker

- D1: Connection by solerless terminal with taping
- D2: Connection by busbar with taping
- D3: Connection by solderless terminal and using insulation barrier
- D4: Connection by busbar and using insulation barrier


| Frame size | Description | D1 (mm) | D2 (mm) | D3 (mm) | D4 (mm) |
|---------------|-------------|------------------------------------|------------|------------------------------------|------------|
| | ABN50c | | 40 | | 40 |
| | ABN60c | | 40 | | 40 |
| | ABN100c | | 50 | | 50 |
| 100AF | ABN100e | | 50 | | 50 |
| | ABS30c | | 30 | | 30 |
| | ABS50c | | 40 | | 40 |
| | ABS60c | | 40 | | 40 |
| | ABS125c | t + 2 | 50 | The dimension of bare conduct + 20 | 50 |
| 40545 | ABH50c | The dimension of bare conduct + 20 | 50 | | 50 |
| 125AF | ABH125c | | 50 | | 50 |
| | ABL125c | | 50 | | 50 |
| | ABN250c | | 50 | | 50 |
| 05045 | ABS250c | isio | 50 | | 50 |
| 250AF | ABH250c | imer | 50 | | 50 |
| | ABL250c | hed | 50 | pe d | 50 |
| | ABN400c | F | 100 | - | 100 |
| 400 4 5 | ABS400c | | 100 | | 100 |
| 400AF | ABH400c | | 100 | | 100 |
| | ABL400c | | 100 | | 100 |
| | ABN800c | | 150 | | 150 |
| 800AF | ABS800c | | 150 | | 150 |
| | ABL800c | | 150 | | 150 |

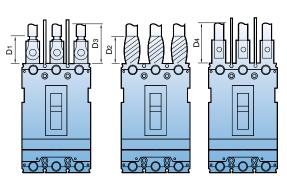


Safety clearance

Minimum distance to metallic side panels


| Frame | | E (r | nm) |
|-------|-------------|------|------|
| size | Description | 460V | 250V |
| | ABN50c | 25 | 15 |
| | ABN60c | 25 | 15 |
| | ABN100c | 25 | 15 |
| 100AF | ABN100e | 25 | 15 |
| | ABS30c | 20 | 15 |
| | ABS50c | 25 | 15 |
| | ABS60c | 25 | 15 |
| | ABS125c | 25 | 15 |
| 125AF | ABH50c | 25 | 15 |
| IZSAF | ABH125c | 50 | 20 |
| | ABL125c | 50 | 20 |
| | ABN250c | 50 | 15 |
| 250AF | ABS250c | 50 | 15 |
| ZOUAF | ABH250c | 50 | 15 |
| | ABL250c | 50 | 15 |
| | ABN400c | 80 | 40 |
| 400AF | ABS400c | 80 | 40 |
| 400AF | ABH400c | 80 | 40 |
| | ABL400c | 80 | 40 |
| | ABN800c | 80 | 40 |
| 800AF | ABS800c | 80 | 40 |
| | ABL800c | 80 | 40 |





Distance of bare cables or busbars


| Frame size | Description | F (mm) |
|---------------|-------------|--------|
| | ABN50c | 10 |
| | ABN60c | 10 |
| | ABN100c | - |
| 100AF | ABN100e | - |
| | ABS30c | 5 |
| | ABS50c | 10 |
| | ABS60c | 10 |
| | ABS125c | - |
| 125AF | ABH50c | 10 |
| IZJAF | ABH125c | 20 |
| | ABL125c | |
| | ABN250c | - |
| 250AF | ABS250c | - |
| ZOUAF | ABH250c | - |
| | ABL250c | |
| | ABN400c | 10 |
| 400AF | ABS400c | 10 |
| 400AF | ABH400c | 10 |
| | ABL400c | 10 |
| | ABN800c | 10 |
| 800AF | ABS800c | 10 |
| | ABL800c | 10 |



Safety clearance

Minimal distance between two adjacent breakers (With terminal covers)

| Frame size | Description | G (mm) |
|------------|-------------|--------|
| | ABN50c | 0 |
| | ABN60c | 0 |
| | ABN100c | 0 |
| 100AF | ABN100e | 0 |
| | ABS30c | 0 |
| | ABS50c | 0 |
| | ABS60c | 0 |
| | ABS125c | 0 |
| 125AF | ABH50c | 0 |
| IZJAF | ABH125c | 0 |
| | ABL125c | 0 |
| | ABN250c | 0 |
| 250AF | ABS250c | 0 |
| ZJUAF | ABH250c | 0 |
| | ABL250c | 0 |
| | ABN400c | 0 |
| 400AF | ABS400c | 0 |
| HUUAF | ABH400c | 0 |
| | ABL400c | 0 |
| | ABN800c | 0 |
| 800AF | ABS800c | 0 |
| | ABL800c | 0 |



Insulation resistance (IR) testing & withstand voltage testing (For ELCB)

Insulation resistance (IR) testing

Insulation resistance marked as \triangle in table1 is not destroyed when 500V is applied using insulation tester but when 1000V is applied. Conduct the testing when the indicator needle of insulation tester wavers greatly. Make sure ELCB is Off before testing.

Withstand voltage testing

When conducting IR testing and withstand voltage testing, Do Not apply voltage for those marked as X in Table1.

Table1. insulation resistance (IR) testing & withstand voltage testing

| Application circuit breaker | Application circuit breaker | | | Withstand vo | Itage testing |
|-----------------------------|--------------------------------|----|-----|--------------|---------------|
| handle status | | On | Off | On | Off |
| Charge-earth | | 0 | 0 | 0 | 0 |
| DOCTOT | Line | Δ | Δ | × | 0 |
| R-S, S-T, R-T | Load | Δ | Δ | × | × |
| Line-load | | _ | 0 | _ | 0 |

Standards & approval

Metasol series circuit breakers and auxiliaries comply with the following international standard:

- IEC 60947-1 Low-voltage switchgear and controlgear - Part 1: General rules
- IEC 60947-2
 Low-voltage switchgear and controlgear Part 2: Circuit-breakers

The following certificates are available on a request.

- CE Declaration of conformity
- Certificate of conformance test (CB) IEC 60947

CE conformity marking

The CE conformity marking shall indicate conformity to all the obligations imposed on the manufacturer, as regards his products, by virtue of the european community directives providing for the affixing of the CE marking.

When the CE marking is affixed on a product, it represents a declaration of the manufacturer or of his authorized representative that the product in question conforms to all the applicable provisions including the conformity assessment procedures.





Standard use environment

Standard use environment for molded case circuit breaker

The operation characteristic of Molded Case Circuit Breaker including short-circuit, overload, endurance and insulation is often influenced largely by external environment and thus should be applied appropriately with conditions of the place where it is used taken into consideration. In particular, the operation characteristic of the circuit breaker with a thermal magnetic trip element (FTU, FMU, ATU) applied changes a bit with the ambient temperature so you have to adjust the value of power rating accordingly when it is actually in use.

- 1) Ambient temperature: Within the range of -5°C~+40°C (However, the average for the duration of 24 hours must not exceed 35°C.)
- 2) Relative humidity: Within the range of 45~85%
- 3) Altitude: 2,000m or less (However, if it exceeds 1,000m, atmosphere correction through humidity test and withstand voltage test can be considered.)
- 4) Atmosphere where excessive steam, oil steam, smoke, dust, salt, conductive powder and other corrosive materials do not exist



- If a standard circuit breaker is used in high temperature exceeding 40°C, you are advised to use it according to the current corrected for each level of ambient temperature in catalog.
- If used in conditions of highly humidity, the dielectric strength or electric performance may be degraded.



- There is no problem in conduction switch, trip or short circuit isolation in the temperature of -20°C.
- Passing or storage in stone-cold area is allowed in the temperature of 40°C.
- The operating characteristic of the breaker with a thermal magnetic trip element changes as the base ambient temperature is adjusted to 40°C.



- It is highly recommended to use a dust cover or anti-humid agent if it is used in dusty and humid conditions.
- Excessive vibration may cause a trip break such as connection fault or flaw on mechanical parts.



- If it is left On or Off for a long time, it is recommended to switch load current on a regular basis.
- It is recommend to put it in the sealed protection if corrosive gas is prevalent.

Special use environment

Environment where ambient temperature exceeds 40℃

The temperate of each module of a Molded Case Circuit Breaker is the sum of temperature increase by conduction and ambient temperature and if the ambient temperature exceeds 40°C the passing current needs to be reduced so that the temperature of such element as internal insulator of MCCB exceed the maximum allowable temperature.

The base ambient temperature of Metasol breaker is set as 40°C so if it has to be used in conditions with higher temperature than this, the rated current is required to be reduced a little as described in the table below.

Table of rated current for Metasol MCCB corrected according to ambient temperature

| according to ambient temperature | | | | | | | | | | | |
|----------------------------------|----|---------|--------------------------------------|---------|----------|-------------|-------------|------------|------------|------------|------------|
| Ampere frame | | Rated | Model name of breaker | Rated | Table of | rated curre | ent correct | ed accordi | ng to ambi | ent temper | rature (A) |
| | | current | Woder Hame of breaker | current | 10℃ | 20℃ | 30℃ | 40℃ | 45℃ | 50℃ | 55℃ |
| | | 3 | | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| | | 5 | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4 |
| | 30 | 10 | ABS30c | 10 | 10 | 10 | 10 | 10 | 10 | 9 | 9 |
| | 30 | 15 | AB5300 | 15 | 15 | 15 | 15 | 15 | 15 | 14 | 13 |
| | | 20 | | 20 | 20 | 20 | 20 | 20 | 19 | 19 | 18 |
| | | 30 | | 30 | 30 | 30 | 30 | 30 | 29 | 28 | 27 |
| | 50 | 40 | ABN50c, ABS50c | 40 | 40 | 40 | 40 | 40 | 39 | 38 | 36 |
| | 50 | 50 | ADNOUC, ADSOUC | 50 | 50 | 50 | 50 | 50 | 49 | 47 | 45 |
| | 60 | 60 | ABN60c, ABS60c | 60 | 60 | 60 | 60 | 60 | 58 | 56 | 55 |
| 100 | 00 | 75 | ABN100c, ABN100e | 75 | 75 | 75 | 75 | 75 | 73 | 71 | 68 |
| | UU | 100 | | 100 | 100 | 100 | 100 | 100 | 97 | 94 | 91 |
| 125 | | 125 | ABH50c, ABS125c, ABH125c, ABL125c | 125 | 125 | 125 | 125 | 125 | 121 | 116 | 107 |
| | | 150 | | 150 | 150 | 150 | 150 | 150 | 145 | 140 | 128 |
| | | 175 | ADMOTO- ADCOTO- | 175 | 175 | 175 | 175 | 175 | 169 | 163 | 150 |
| 250 | | 200 | ABN250c, ABS250c, | 200 | 200 | 200 | 200 | 200 | 193 | 186 | 17 |
| | | 225 | ABH250c, ABL250c | 225 | 225 | 225 | 225 | 225 | 217 | 209 | 193 |
| | | 250 | | 250 | 250 | 250 | 250 | 250 | 241 | 233 | 214 |
| | | 250 | | 250 | 250 | 250 | 250 | 250 | 246 | 242 | 238 |
| 400 | | 300 | ABN400c, ABS400c | 300 | 300 | 300 | 300 | 300 | 295 | 291 | 287 |
| 400 | | 350 | ABH400c, ABL400c | 350 | 350 | 350 | 350 | 350 | 345 | 339 | 332 |
| | | 400 | | 400 | 400 | 400 | 400 | 400 | 394 | 388 | 381 |
| 800 | | 700 | ABN800c, ABS800c | 700 | 700 | 700 | 700 | 700 | 689 | 679 | 668 |
| 800 | | 800 | ABL800c | 800 | 800 | 800 | 800 | 800 | 788 | 776 | 764 |

Technical document

Special use environment

Table of rated current for Metasol ELCB corrected according to ambient temperature

| Ampe | re | Rated | Madalmana athuralan | Rated | Table of | rated curre | ent correct | ed accordi | ng to ambi | ent temper | rature (A) |
|-------|----------|---------|------------------------------|---------|----------|-------------|-------------|------------|------------|------------|------------|
| frame | | current | Model name of breaker | current | 10℃ | 20℃ | 30℃ | 40℃ | 45℃ | 50℃ | 55℃ |
| | | 15 | | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| | 30 | 20 | EBS30c | 20 | 20 | 20 | 20 | 20 | 19 | 19 | 18 |
| | | 30 | | 30 | 30 | 30 | 30 | 30 | 29 | 28 | 27 |
| | 50 | 40 | EDNEO EDCEO | 40 | 40 | 40 | 40 | 40 | 39 | 38 | 36 |
| | 50 | 50 | EBN50c, EBS50c | 50 | 50 | 50 | 50 | 50 | 49 | 47 | 45 |
| | 60 | 60 | EBN60c, EBS60c | 60 | 60 | 60 | 60 | 60 | 58 | 56 | 55 |
| | 100 | 75 | EBN100c | 75 | 75 | 75 | 75 | 75 | 73 | 71 | 68 |
| | 100 | 100 | | 100 | 100 | 100 | 100 | 100 | 97 | 94 | 91 |
| 12 | 25 | 125 | EBH50c, EBS125c, EBH125c | 125 | 125 | 125 | 125 | 125 | 121 | 116 | 107 |
| | | 150 | EDNOSA EDOSA | 150 | 150 | 150 | 150 | 150 | 145 | 140 | 128 |
| | | 175 | | 175 | 175 | 175 | 175 | 175 | 169 | 163 | 150 |
| 250 | | 200 | EBN250c, EBS250c, EBH250c | 200 | 200 | 200 | 200 | 200 | 193 | 186 | 171 |
| | | 225 | EBH2300 | 225 | 225 | 225 | 225 | 225 | 217 | 209 | 193 |
| | | 250 | | 250 | 250 | 250 | 250 | 250 | 241 | 233 | 214 |
| | | 250 | | 250 | 250 | 250 | 250 | 246 | 242 | 238 | 238 |
| 400 | | 300 | EBN400c, EBS400c, | 300 | 300 | 300 | 300 | 295 | 291 | 287 | 287 |
| 400 | | 350 | EBH400c, EBL400c | 350 | 350 | 350 | 350 | 345 | 339 | 332 | 332 |
| | | 400 | | 400 | 400 | 400 | 400 | 394 | 388 | 381 | 381 |
| 800 | | 700 | EBN800c, EBS800c | 700 | 700 | 700 | 700 | 689 | 679 | 668 | 668 |
| 800 | <u> </u> | 800 | EBL800c | 800 | 800 | 800 | 800 | 788 | 776 | 764 | 764 |

Environment where ambient temperature is -5°C or less

Molded Case Circuit Breaker is subject to the effect of low temperature brittle of metal part inside and insulator, or changes in viscosity of lubricating oil in device, extra care should be taken not to have the temperature drop extremely with the use of such device as space heater. In addition, in case of using a thermal magnetic trip element (FTU, FMU, ATU), the operating characteristic changes toward the difficult direction, so you should identify the relationship of protection and correct accordingly.

Although MCCB is not affected by conduction switch, trip, or short circuit isolation in the temperature of - 20°C, it is highly recommended to use a temperature maintaining device such as space heater. In addition, transportation and passing in stone-cold area in the temperature as low as -40°C is allowed but it is recommend to leave the status of MCCB off or tripped in order to minimize the effect of brittle due to a low temperature.

High humidity condition (Relative humidity 85% or more)

Using Molded Case Circuit Breaker in a place of high humidity requires a rigorous maintenance including installation of anti-humidity agent within the structure in order to prevent the insulation sag of insulator or corrosion of mechanical parts as a result of high humidity. Also, in case of installing MCCB within the enclosed equipment, a space heater needs to be installed as well to prevent dew condensation that might occur due to a drastic temperature change.

Environment where petrochemical gas exists

The contact material of Molded Case Circuit Breaker is silver or silver alloy which develops creation of petrochemical coat that might cause a poor connection if it gets in contact with petrochemical gas.

However, it is easy for petrochemical coat to be mechanically taken off so it is no problem if make-and break operation occurs frequently but it needs to be switched back and forth between make and break if the operation rarely occurs.

The lead wire of moving contact of Molded Case Circuit Breaker can be disconnected as it is corroded or hardened by petrochemical gas. The silver coating is effective to prevent this from occurring and there is a need to increase durability of MCCB with the use of silver coated lead wire if it is used in environment with thick petrochemical gas.

Environment where potentially explosive gas exists

It is advised, in principle, not to install a Molded Case Circuit Breaker that switches and inhibits current in a dangerous place such as this one.

Impact of altitude

If an MCCB is used in an elevated area higher than 2000m sea level, its operating performance is subject to dramatic drop in atmospheric pressure and temperature. For example, the air pressure is reduced to 80% of ordinary pressure at 2,200m and further 50% at 5,500m although the short-circuit performance is not affected. If it is used in areas of high sea level, you can do correction based on the correction parameter table in high altitude environment, as described below

- * Refer to the correction parameter table in high altitude environment (ANSI C37. 29-1970)
- 1) How to correct voltage:
 - If the rated voltage is AC 600V at 4,000m above sea level, 600V (rated voltage) × 0.82 (correction parameter) = 492V.
- 2) How to correct current:
 - If the rated voltage is AC 800A at above 4,000m sea level, 800A (rated current) \times 0.96 (correction parameter) = 768A.

[Correction parameter table for altitude]

| e Current |
|----------------------------------|
| ion correction eter parameter |
| 1.00 |
| 0.98 |
| 0.96 |
| 0.94 |
| 0.92 |
| |

Technical document

Environment with vibration and impulse exercised

Impact of vibration and impulse

An excessive vibration and impulse may cause damage on breaker or other security problems including dynamic strength. An appropriate consideration is required to select a right MCCB for an adverse environmental stress such as this one. Moreover, this stress may incur from vibration during transportation, magnetic impulse while manipulating a switch or may be affected by equipment in surrounding area.

There is a standard call [Vibration testing method for small electric appliances] for vibration and impulse test for electric equipment and the seismic and endurance tests of Molded Case Circuit Breaker are conducted in accordance with this standard, considering the circumstance mentioned above.

Vibration

The magnitude of vibration is measured by double amplitude and frequency with the following equation with accelerator.

 $\alpha g = 0.002 \times \text{frequency (Hz)} \times \text{double amplitude (mm)}$

* ag: Multiple of gravitational acceleration (g = 9.8m/sec2)

There are three types of vibration tests including resonance test, vibration endurance test, and malfunction test as described below.

1) Resonant test

Alter the frequency of sinusoidal wave within the range of 0~55Hz gradually with 0.5~1mm of double amplitude applied to see if there is any occurrence of vibration on a specific part of MCCB.

2) Vibration endurance test

A sinusoidal wave with double amplitude of $0.5\sim1$ mm and frequency of 55Hz (Resonant frequency obtained in previous clause if there is a resonant point) is manually created to check the operational status.

3) Malfunction test

Apply vibration for 10 minutes for each condition of altering double amplitude and frequency to check if there is any malfunction in MCCB.

Impulse

The magnitude of impulse is denoted by the multiple of gravitational acceleration imposed on the equipment and part. The test is conducted through a drop impulse test.

Impact of high frequency

In case of high frequency current, you are required to reduce the rated current of the breaker with a thermal magnetic trip element embedded due to heat incurred by the skin effect of conductor and/or core less of structure. The reduction rate varies according to the frame Size and rated current and decreases down to 70~80% at 400Hz. In addition, the core loss decreases attractive force, which leads to increase of instantaneous trip current.

- * Core loss: It refers to the electrical loss in a transformer caused by magnetization of the core that changes over time and is categorized into hysteresis loss and eddy current loss.
- * Hysteresis loss: It takes up the majority portion of no-load loss of electric equipment and is calculated like this. $Ph = \sigma fBmn$

Bm: Maximum value of magnetic flux density, n: constant (1.6~2.0), f: Frequency, σ: Hysteresis constant

* Eddy current: It refers to an induced electric current formed within the body of a conductor when it moves through a non-uniform or changing magnetic field. The eddy current that incurs at winding of transformer or core is considered as one of the transformer losses as a part of exciting current. It is also called 'eddy current loss'.

Use environment with vibration and impulse applied

[Table of seismic performance and internal impulse performance]

| | | Test | Internal impulse |
|----------------|---------------------|--|--|
| Test condition | Mounting vibration, | Vertical mountingTop-down, Left-right, Front-back | Picture 1, 2, 3, 4 (→ Represents the direction of drop) |
| | of impulse | Top-down Line connection | Picture 1 Picture 2 On |
| | Status of MCCB | (1) Non-conduction (On or Off status)(2) Status where rated current is conducted until the temperature of MCCB becomes constant and keeps being conducted | Non-conduction (On or Off status) |
| Test | Judgment | If it is On, it should not be Off | |
| result | condition | If it is Off, it should not be On No abnormal status such as damage, transformation, or annealing of nut part Characteristics of switch and trip after the test must be normal | |

Certifications

MCCB

| | Туре | Appr | ovals | Certificates | 1 |
|---------------|-------------|-------------|--------|--------------|---|
| \ \ | Certificate | Safet certi | IEC | KEMA | |
| | Mark and | | ((| КЕМА≅ | |
| name Type | | | CE | KEMA | |
| Тур | Эе | Korea | Europe | Netherlands | |
| | ABS32c | • | • | • | |
| | ABS33c | • | • | • | |
| | ABS34c | • | • | • | |
| | ABN52c | • | • | • | |
| | ABN53c | • | • | • | |
| | ABN54c | • | • | • | |
| | ABS52c | • | • | • | |
| | ABS53c | • | • | • | |
| | ABS54c | • | • | • | |
| | ABN62c | • | • | • | |
| | ABN63c | • | • | • | |
| | ABN64c | • | • | • | |
| | ABS62c | • | • | • | |
| | ABS63c | • | • | • | |
| | ABS64c | • | • | • | |
| | ABN102c | • | • | • | |
| | ABN103c | • | • | • | |
| | ABN104c | • | • | • | |
| | ABS32d | • | • | • | |
| | ABS33d | • | • | • | |
| | ABS34d | • | • | • | |
| ΠĀ | ABN52d | • | • | • | |
| MCCB 30~250AF | ABN53d | • | • | • | |
| 30~ | ABN54d | • | • | • | |
| CB | ABS52d | • | • | • | |
| Σ | ABS53d | • | • | • | |
| | ABS54d | • | • | • | |
| | ABN62d | • | • | • | |
| | ABN63d | • | • | • | |
| | ABN64d | • | • | • | |
| | ABS62d | • | • | | |
| | ABS63d | • | | • | |
| | ABS64d | • | | • | |
| | ABN102d | • | • | | |
| | ABN103d | • | • | • | |
| | ABN104d | | | • | |
| | ABP52c | • | • | • | |
| | ABP53c | | • | • | |
| | ABP54c | • | • | • | |
| | ABH52c | • | • | • | |
| | ABH53c | • | • | • | |
| | ABH54c | • | • | • | |
| | ABS102c | • | • | • | |
| | ABS103c | • | • | • | |
| | ABS104c | • | • | • | |
| | ABP102c | • | • | • | |
| | ABP103c | • | • | | |
| | | | | _ | |

| Туре | | Approvals | | Certificates |
|---------------------|---------|-------------|--------|---------------|
| Certificate | | Safet certi | IEC | KEMA |
| Mark and name | | | CE | KEMA≼ KEMA |
| Туре | | Korea | | |
| | | | Europe | Netherlands |
| 250AF | ABU100 | • | • | - |
| | ABH102c | • | • | • |
| | ABH103c | • | • | • |
| | ABH104c | • | • | • |
| | ABN202c | • | • | • |
| | ABN203c | • | • | • |
| | ABN204c | • | • | • |
| 30~; | ABS202c | • | • | • |
| MCCB 30~250AF | ABS203c | • | • | • |
| | ABS204c | • | • | • |
| | ABP202c | • | • | • |
| | ABP203c | • | • | • |
| | ABP204c | • | • | • |
| | ABH202c | • | • | • |
| | ABH203c | • | • | • |
| | ABH204c | • | • | • |
| | ABN402c | • | • | • |
| | ABN403c | • | • | • |
| | ABN404c | • | • | • |
| | ABS402c | • | • | • |
| | ABS403c | • | • | • |
| | ABS404c | • | • | • |
| | ABH402c | • | • | • |
| | ABH403c | • | • | • |
| | ABH404c | • | • | • |
| | ABL402c | • | • | • |
| | ABL403c | • | • | • |
| | ABL404c | • | • | • |
| ACCB 400~800AF | ABN602c | | • | • |
| | ABN603c | | • | • |
| | ABN604c | | • | • |
| | ABS602c | | • | • |
| | ABS603c | | • | • |
| Σ | ABS604c | | • | • |
| | ABL602c | | • | • |
| | ABL603c | | • | • |
| | ABL604c | | • | • |
| | ABN802c | | • | • |
| | ABN803c | | • | • |
| | ABN804c | | • | • |
| | ABS802c | | • | • |
| | ABS803c | | • | • |
| | ABS804c | | • | • |
| | ABL802c | | • | • |
| | ABL803c | | • | • |
| | ABL804c | | • | • |
| | | | | |

ELCB

| Туре | | Approvals | | Certificates |
|---------------|--------------------|-------------|--------|--------------|
| Certificate | | Safet certi | IEC | KEMA |
| | Mark and | | CE | КЕМА≅ |
| T | name | | CE | KEMA |
| Тур | | Korea | Europe | Netherlands |
| 1 | EBS32c EBS33c | | | • |
| | EBS34c | | • | |
| | EBN52c | | | • |
| | EBN53c | | • | • |
| | EBS53c | • | • | • |
| | EBS54c | • | • | • |
| | EBN63c | • | • | • |
| | EBS63c | • | • | • |
| | EBS64c | • | • | • |
| | EBN102c | • | • | • |
| | EBN103c | • | • | • |
| | EBN104c | • | • | • |
| | EBS33d | • | • | • |
| | EBS34d | • | • | • |
| ٩F | EBN52d | • | • | • |
| | EBN53d | • | • | • |
| | EBS53d | • | • | • |
| | EBS54d | • | • | • |
| | EBN63d | • | • | • |
| .250 | EBS63d | • | • | • |
| ELCB 30~250AF | EBS64d | • | • | • |
| ICB | EBN102d | • | • | • |
| ш | EBN103d | • | • | • |
| | EBN104d | • | • | • |
| | EBP53c | • | • | • |
| | EBP54c | • | • | • |
| | EBH53c | • | • | • |
| | EBH54c | - | • | - |
| | EBS103c | • | • | • |
| | EBS104c EBP103c | • | • | • |
| | EBP103C | • | | • |
| | EBH103c | • | | |
| | EBH104c | • | • | • |
| | EBN202c | • | • | • |
| | EBN203c | • | • | • |
| | EBS203c | • | • | • |
| | EBS204c | • | • | • |
| | EBP203c | • | • | • |
| | EBP204c | • | • | • |
| | EBH203c | • | • | • |
| | EBH204c | • | • | • |
| | | | | |

Note: ● (Completion)



We open up a brighter future through efficient and convenient energy solutions.



Safety Instructions

- · For your safety, please read user's manual thoroughly before operating.
- · Contact the nearest authorized service facility for examination, repair, or adjustment.
- · Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



According to The WEEE Directive, please do not discard the device with your household waste.



■ Headquarter

127 LS-ro (Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea Tel. 82-2-2034-4916, 4684, 4429

■ Overseas Subsidiaries

- LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan) Tel: 81-3-6268-8241 E-Mail: japan@ls-electric.com
- LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)
 Tel: 86-411-8730-5872 E-Mail: china.dalian@lselectric.com.cn
- LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China) E-Mail: china.wuxi@lselectric.com.cn Tel: 86-510-6851-6666
- LS ELECTRIC Vietnam Co., Ltd. (Hanoi, Vietnam) Tel: 84-93-631-4099 E-Mail: vietnam@ls-electric.com LS ELECTRIC Middle East FZE (Dubai, U.A.E.)
- Tel: 971-4-886-5360 E-Mail: middleeast@ls-electric.com • LS ELECTRIC Europe B.V. (Hoofddorf, Netherlands)
- Tel: 31-20-654-1424 E-Mail: europartner@ls-electric.com • LS ELECTRIC America Inc. (Chicago, USA)
- Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com • LS ENERGY SOLUTIONS LLC (Charlotte, USA) Tel: 1-704-587-4051 E-Mail: cmfeldman@ls-es.com
- LS ELECTRIC Turkey Co., Ltd. (Istanbul, Turkey)



Technical Question or After-sales Service

Customer Center-Quick Responsive Service, Excellent technical support

82-1644-5481

www.ls-electric.com

■ Overseas Branches

 LS ELECTRIC Tokyo Office (Japan) Tel: 81-3-6268-8241 E-Mail: tokyo@ls-electric.com

• LS ELECTRIC Beijing Office (China) Tel: 86-10-5095-1631 E-Mail: china@lselectric.com.cn

• LS ELECTRIC Guangzhou Office (China) Tel: 86-20-3818-2883 E-Mail: china@lselectric.com.cn

• LS ELECTRIC Chengdu Office (China) Tel: 86-28-8670-3201 E-Mail: china@lselectric.com.cn

 LS ELECTRIC Qingdao Office (China) Tel: 86-532-8501-2065 E-Mail: china@lselectric.com.cn

 LS ELECTRIC Nanjing Office (China) Tel: 86-25-8467-0005 E-Mail: china@lselectric.com.cn LS ELECTRIC Bangkok Office (Thailand)

Tel: 66-90-950-9683 E-Mail: thailand@ls-electric.com • LS ELECTRIC Jakarta Office (Indonesia)

Tel: 62-21-2933-7614 E-Mail: indonesia@ls-electric.com

• LS ELECTRIC Moscow Office (Russia) Tel: 7-499-682-6130 E-Mail: info@lselectric-ru.com

 LS ELECTRIC America Western Office (Irvine, USA) Tel: 1-949-333-3140 E-Mail: america@ls-electric.com

• LS ELECTRIC India Office (India) Tel: 91-80-6142-9108 E-Mail: Info_india@ls-electric.com

• LS ELECTRIC Singapore Office (Singapore) E-Mail: singapore@ls-electric.com