



NB1-63H Miniature Circuit Breaker

1. General

1.1 Function

protection of circuits against short-circuit currents,
protection of circuits against overload currents,
switch, isolation.

NB1-63H circuit-breakers are used in domestic installation,
as well as in commercial and industry electrical
distribution systems.

1.2 Selection

Technical data of the network at the point considered:
short-circuit current at the circuit-breaker installation point,
which must always be less than the breaking capacity of
this device, network normal voltage.

Tripping curves:

B curve (3-5In)

protection for people and big length cables in TN and IT
systems.

C curve (5-10In)


protection for resistive and inductive loads with low inrush
current.

D curve (10-14In)

protection for circuits which supply loads with high inrush
current at the circuit closing
(LV/LV transformers, breakdown lamps).

2. Technical data

2.1 curves

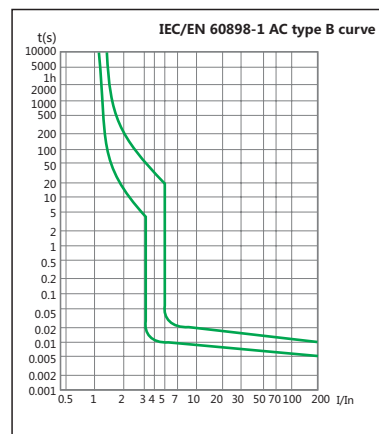

تهران - خیابان لاله زارنو - بالاتر از منوچهری - پاساژ البرز ۲۰ - طبقه اول - واحد ۲۳۵

۰۲۱-۶۶۳۴۱۰۹۰-۹۲

۰۹۳۹۶۲۹۲۰۰۱




splus.ir/peoe_iran

aparat.com/peoe_iran

www.peoe.ir

t.me/peoe_iran

instagram.com/peoe_iran

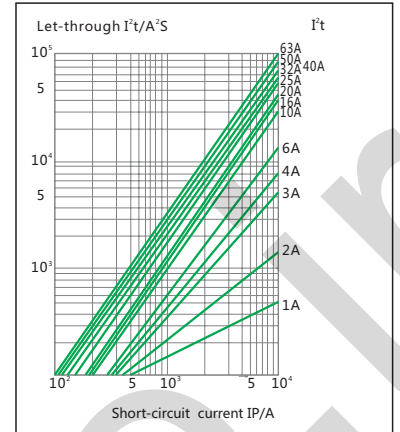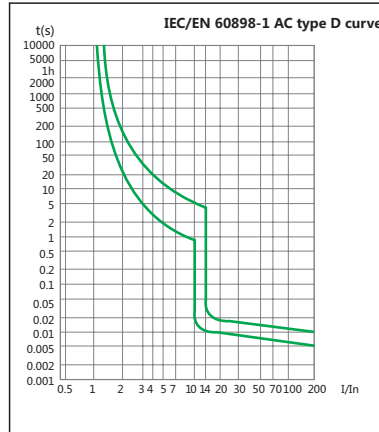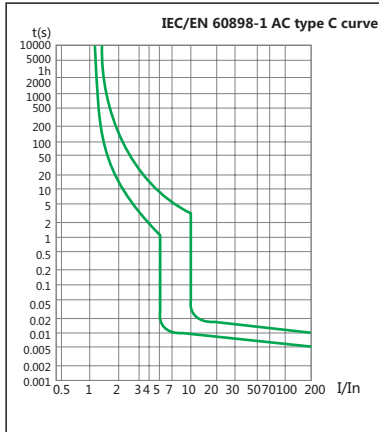

2.2

	Standard	IEC/EN 60898-1	
Electrical features	Rated current I_n	A	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63
	Poles		1P, 1P+N, 2P, 3P, 3P+N, 4P
	Rated voltage U_e	V	230/400~240/415
	Insulation voltage U_i	V	500
	Rated frequency		50/60Hz
	Rated breaking capacity	A	10000
	Energy limiting class		3
	Rated impulse withstand voltage(1.2/50) U_{imp}	V	6000
	Dielectric test voltage at ind. Freq. for 1 min	kV	2
	Pollution degree		2
Power loss per pole	Rated current (A)		Max power loss per pole (W)
	1, 2, 3, 4, 5, 6, 10		2
	13, 16, 20, 25, 32		3.5
	40, 50, 63		5
Thermo-magnetic release characteristic		B, C, D	
Mechanical features	Electrical life		4,000
	Mechanical life		20,000
	Contact position indicator		Yes
	Protection degree		IP20
	Reference temperature for setting of thermal element	°C	30
	Ambient temperature (with daily average $\leq 35^\circ\text{C}$)	°C	-35...+70(Special application please refer to P10 for temperature compensation correction)
	Storage temperature	°C	-35...+70
Installation	Terminal connection type		Cable/U-type busbar/Pin-type busbar
	Terminal size top/bottom for cable	mm ²	25
		AWG	18-4
	Terminal size top/bottom for busbar	mm ²	10
		AWG	18-8
	Tightening torque	N m	2.0
Combination with accessories		In-lbs.	22
	Mounting		On DIN rail EN 60715 (35mm) by means of fast clip device
	Connection		From top and bottom
	Auxiliary contact		Yes
	Shunt release		Yes
	Under voltage release		Yes
	Alarm contact		Yes

2.3 Selectivity

Load side: NB1-63, NB1-63H Curve B, C	In (A)	Power supply side: RT36-00 (fuse)								
		20	25	36	50	63	80	100	125	160
		Is (kA)								
	≤2	1.2	4	> 12	> 12	> 12	> 12	> 12	> 12	> 12
	3	0.7	1.2	3.8	5.3	6	6	6	6	6
	4	0.6	0.9	2.5	3.8	6	6	6	6	6
	6	0.5	0.8	1.9	2.5	4.5	5	6	6	6
	10		0.7	1.4	2.2	3.2	3.6	6	6	6
	16			1.2	1.8	2.6	3	5.6	6	6
	20				1.5	2.2	2.5	4.6	6	6
	25				1.3	2	2.2	4.1	5.5	6
	32					1.7	1.9	3.8	4.5	6
40						1.7	3	4	5	
50						1.5	2.6	3.5	4.5	
63							2.4	3.3	4.5	

Load side: NB1-63, NB1-63H Curve B, C	In (A)	Power supply side: NM8-100S/H/R								
		16	20	25	32	40	50	63	80	100
		Is (kA)								
	≤10	0.19	0.19	0.3	0.4	0.5	0.5	0.5	0.63	0.8
	16			0.3	0.4	0.5	0.5	0.5	0.63	0.8
	20					0.5	0.5	0.5	0.63	0.8
	25						0.5	0.5	0.63	0.8
	32							0.5	0.63	0.8
	40								0.63	0.8
	50									0.8
63										

2.4 Backup protection

Load side: NB1-63, NB1-63H Curve B, C	In (A)	Power supply side: RT16 series						
		40	50	63	80	100	125	160
		Is (kA)						
	1~6	40	40	40	40	40	40	40
	8~10	40	40	40	40	40	40	40
	13	40	40	40	40	35	35	35
	16	40	40	40	40	30	30	30
	20	40	40	40	40	30	30	30
	25	40	40	40	40	30	30	30
	32	40	40	40	40	30	30	30
40	40	40	40	40	30	30	30	
50	30	30	30	30	30	30	30	
63	20	20	20	20	15	15	15	

Load side: NB1-63, NB1-63H Curve B, C	In (A)	Power supply side: NM8					
		NM8-125S	NM8-125H	NM8-125R	NM8-250S	NM8-250H	NM8-250R
		Is (kA)					
	1~6	15	18	18	15	15	15
	10~20	12	15	15	12	12	12
	32~40	12	15	15	12	12	12
50~60	12	15	15	12	12	12	

2.5 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

The reference temperature is 30°C

Ambient temperature Rated current(A)	-35	-30	-20	-10	0	10	20	30	40	50	60	70
1	1.3	1.26	1.23	1.19	1.15	1.11	1.05	1	0.96	0.93	0.88	0.83
2	2.6	2.52	2.46	2.38	2.28	2.2	2.08	2	1.92	1.86	1.76	1.66
3	3.9	3.78	3.69	3.57	3.42	3.3	3.12	3	2.88	2.79	2.64	2.49
4	5.2	5.04	4.92	4.76	4.56	4.4	4.16	4	3.84	3.76	3.52	3.32
6	7.80	7.56	7.38	7.14	6.84	6.6	6.24	6	5.76	5.64	5.28	4.98
10	13.20	12.7	12.5	12	11.5	11.1	10.6	10	9.6	9.3	8.9	8.40
16	21.12	20.48	20	19.2	18.4	17.76	16.96	16	15.36	14.88	14.24	10.92
20	26.40	25.6	25	24	23	22.2	21.2	20	19.2	18.6	17.8	16.80
25	33	32	31.25	30	28.75	27.75	26.5	25	24	23.25	22.25	21
32	42.56	41.28	40	38.72	37.12	35.52	33.92	32	30.72	29.76	28.16	26.88
40	53.20	51.2	50	48	46.4	44.8	42.4	40	38.4	37.2	35.6	33.60
50	67	65.5	63	60.5	58	56	53	50	48	46.5	44	41.50
63	83.79	81.9	80.01	76.86	73.71	70.56	66.78	63	60.48	58.9	55.44	52.29

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure, the temperature rise inside the enclosure causes a reduction in current rating.

You must then assign the rating (already derated if necessary according to ambient temperature) a downrating factor of 0.8.

3. Overall and mounting dimensions (mm)

