



**Current Transformer**  
**Window – Type**  
**0.72/ 3kV; 50 – 60 Hz**

MAG ELECTRIC Co.

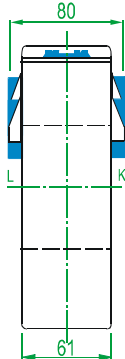

**Type AL5**

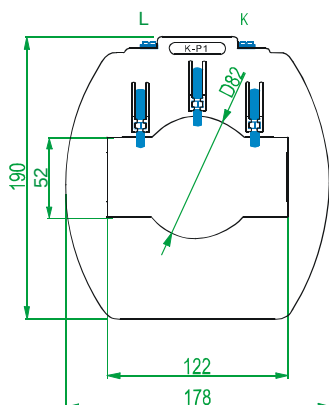

**Window Sizes**

**Bars**

3 × (120 × 10)

Round conductors up to 82 Ø

Accessories on request:  
 Secondary terminal cover



| Secondary<br>Primary<br>A | 1A,5A<br>Class 0.5<br>Max(VA) | Class 1<br>Max(VA) | Class 3<br>Max(VA) |
|---------------------------|-------------------------------|--------------------|--------------------|
| 1500                      | 20                            | 25                 | 40                 |
| 2000                      | 25                            | 30                 | 45                 |
| 2500                      | 30                            | 35                 | 50                 |
| 3000                      | 35                            | 40                 | 52.5               |
| 4000                      | 40                            | 45                 | 55                 |

Other VA-Ratings, special ratios and CT's class 0.2 on request

Dimensions in mm



**Type ALZ**

Normal or Summation Current  
 Transformer

With screw – type terminal  
 for cable socket



**Type ALS**

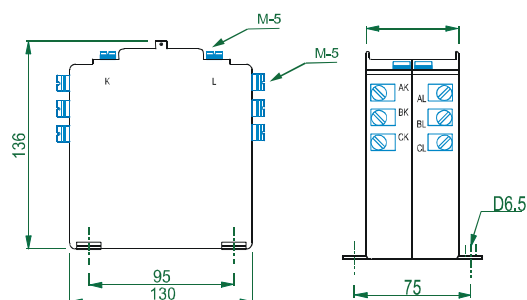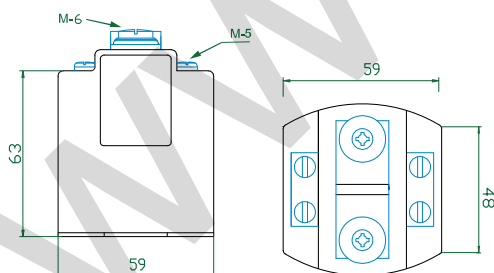

**(Type ALZ) Technical Data**

| $I_N(A)$ | Primary | Type   | Current | Secondary | Current | 1A,5A   |
|----------|---------|--------|---------|-----------|---------|---------|
| 1 – 40   | ALZ     | Normal | Class   | 0.5-3     | Output  | 1-20 VA |

Supplied with mounting feet

Dimensions in mm

**(Type ALS) Technical Data**

| $I_N(A)$          | Primary | Type   | Current | Secondary | Current | 1A,5A   |
|-------------------|---------|--------|---------|-----------|---------|---------|
| 2 to 6(5A,1A) SUM | ALS     | Normal | Class   | 0.5-3     | Output  | 1-45 VA |

**! It is recommended to select the minimum required VA, otherwise the CT's security factor and price will increase.**